
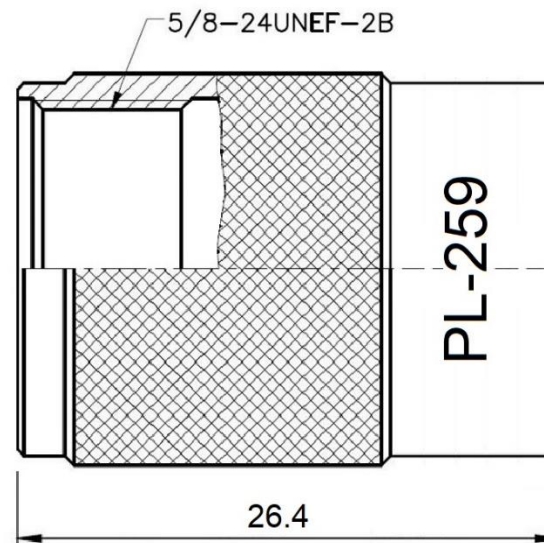


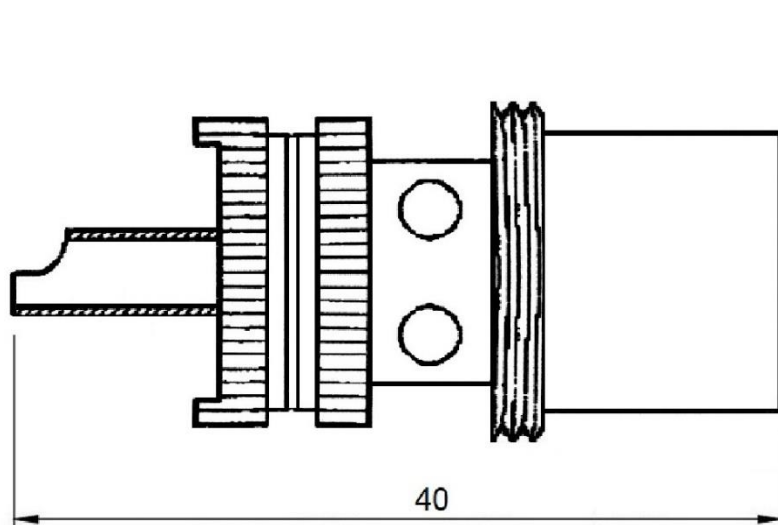

SPECIFICATIONS

VOLTAGE RATING: 500 VOLTS RMS
IMPEDANCE: NON CONSTANT
FREQUENCY RANGE: 0-300

FIT:

For all 0.390 to 0.400 OD Coax Types Including RG-8, RG-213, Belden 9913, LMR-400

w/ 7508-S Reducer


For all 0.240 OD Coax Types Including RG-8X, mini 8, RG-59, Belden 9258, LMR-240

w/ 507-S Reducer

For all 0.195 OD Coax Types Including RG-58, RG-142, RG-223, RG-400, LMR-195

w/ 7506-S Reducer

For all 0.100 OD Coax Types Including RG-174, RG-178, RG-188, RG-196, Belden 8216, LMR-100

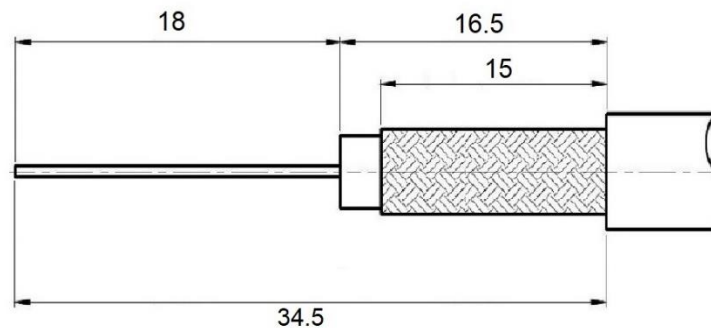

Alternate stripping required
when using reducers

MGS MAX-GAIN
SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 | Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

UNLESS OTHERWISE
SPECIFIED TOLERANCES
0.5-5 = ± 0.2
5-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

UNIT: mm

SCALE: .

PART NO DATE

APPROVED DATE

CHECKED DATE

DRAWN DATE

TITLE: PL-259 UHF male Solder On,
for LMR-400, RG-213, RG-8

DRAWING NO: 7500-UHF

FILE NO : .

NO.	DESCRIPTION	MATERIAL	FINISH
	PIN	BRASS	SILVER
	SHELL	BRASS	SILVER
	DIELECTRIC	TEFLON	WHITE
	BODY	BRASS	SILVER