

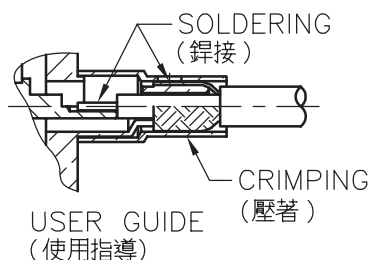
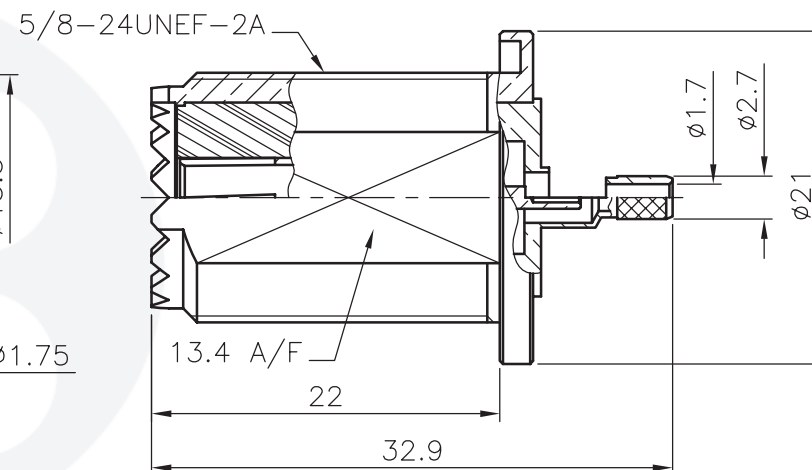
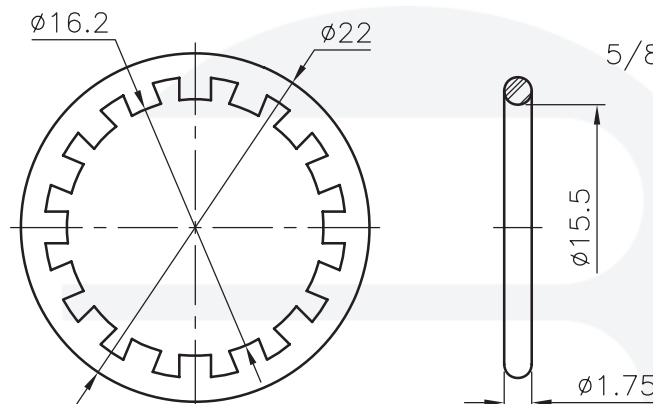


REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE

FOR CUSTOMER


REMARK: RoHS COMPLIANT
(符合 RoHS)

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

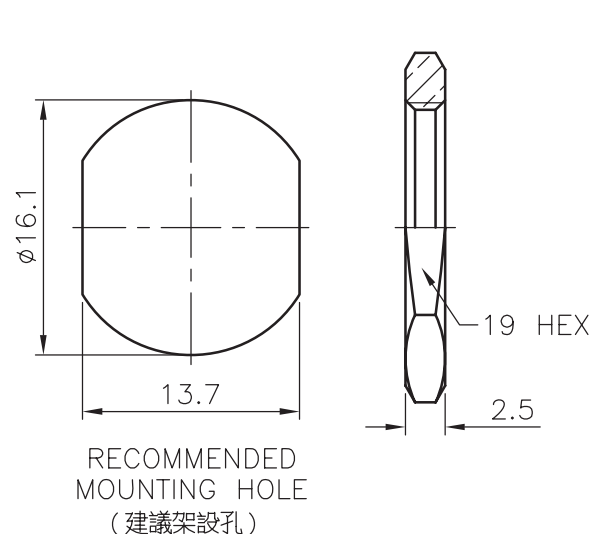

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS JIS H 3100,C 2680
3. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK
OVER COPPER STRIKE

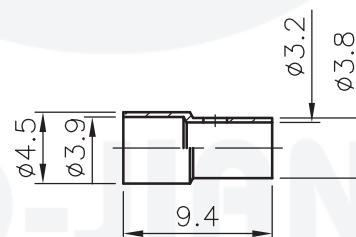

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)
3. MAX. PANEL THICKNESS=8.5mm
(最大板厚)

	NUT	NOTE 1	NOTE 3							(最大板厚)		
	WASHER	NOTE 2	NOTE 3			DIMENSIONS ARE IN MILLIMETERS				PART NO.		 帛江科技股份有限公司 BO-JIANG BO-JIANG TECHNOLOGY CO., LTD.
	GASKET	RUBBER	BLACK			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5'				APPROVED	DATE	
	FERRULE	NOTE 1	NOTE 3								04/03/07'	
	BRAID HOLDER	NOTE 1	NOTE 3							CHECKED	DATE	
	CONTACT PIN	NOTE 1	NOTE 5								04/03/07'	
	INSULATOR	NOTE 4	WHITE							DRAWN	DATE	
	BODY	NOTE 1	NOTE 3				04/03/07'	TITLE	UHF BULKHEAD CRIMP JACK (FOR RG-188A/U,316/U)			
								DRAWING NO.	7561DS509BF001B			
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2/1	ISSUE	A2	FILE NO.	Z:\NND\7561\DS\509\001\7561DS509BF001B-A2	