



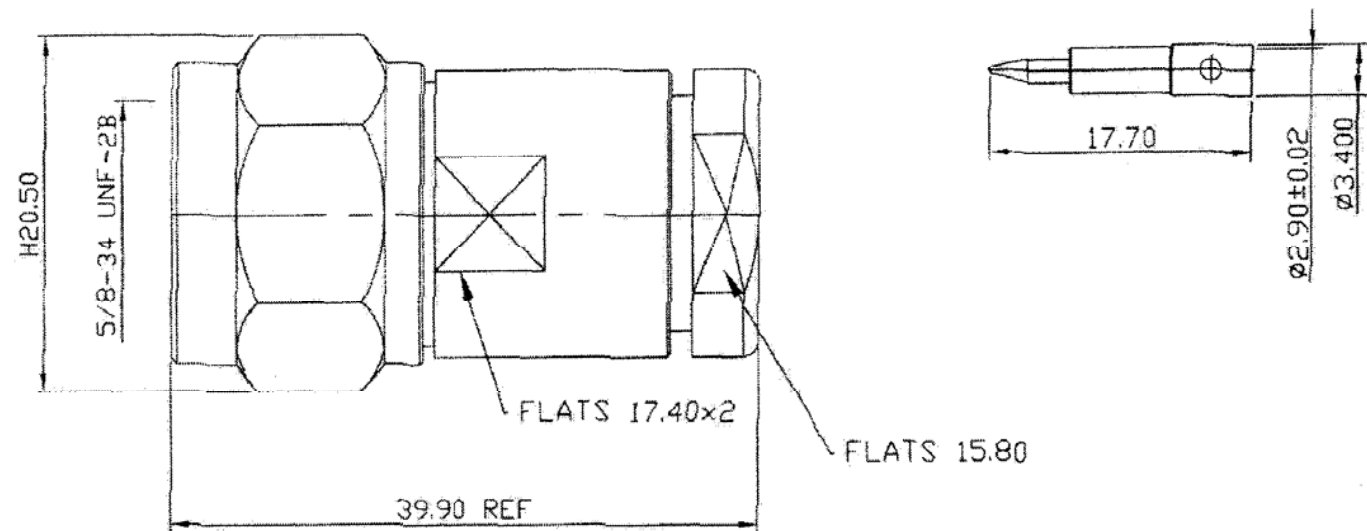

MATERIAL : BODY-BRASS
 INSULATOR-TEFLON
 CONTACT-BRASS
 SLEEVE-BRASS
 NUT-BRASS
 SLEEVE-BRASS
 O-RING-RI RUBBER
 C-WASHER-BRASS
 GASKET-SILICONE
 SHELL-BRASS

FINISH : BODY-TRI-ALLOY PLATING
 CONTACT-GOLD PLATING OVER NICKEL
 SLEEVE-TIN PLATING OVER NICKEL
 NUT-TRI-ALLOY PLATING
 SLEEVE-TRI-ALLOY PLATING
 SHELL-TRI-ALLOY PLATING

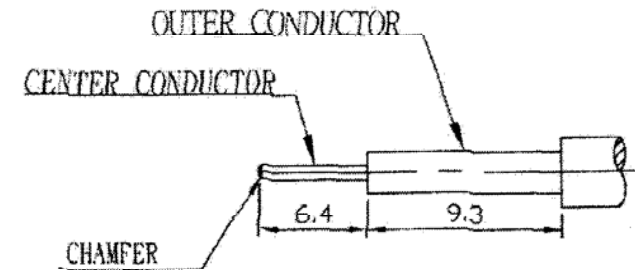

DIMENSIONS ARE IN MILLIMETERS				THE R.F. CONNECTION	
TOLERANCE				PART#: 11013038	
× ×	±0.5	ANGLE ±3°	SCALE	TITLE N Straight Plug Clamp for 3/8" Super Flex cable (FSJ2-50A), RF 5038, SCF38-50J	
× × ×	±0.1		REV		
× × × ×	±0.05		A-2		
DRAWN 涂君昂		DATE 102.07.31		DRAWING NO	
APPROVAL		DATE		Part # 11013038	