
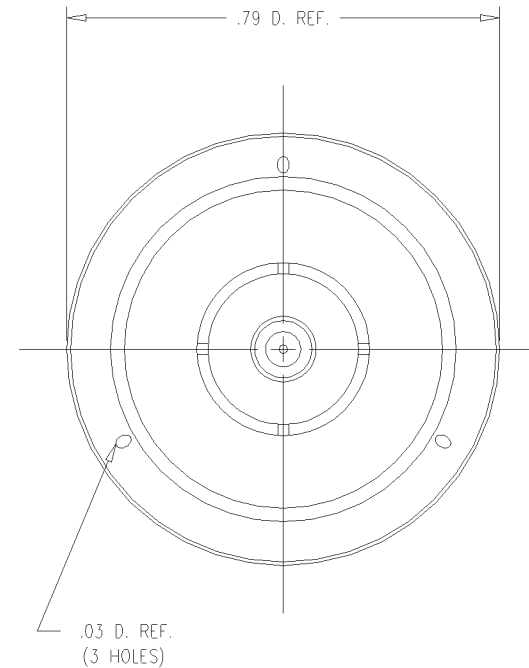


GSD

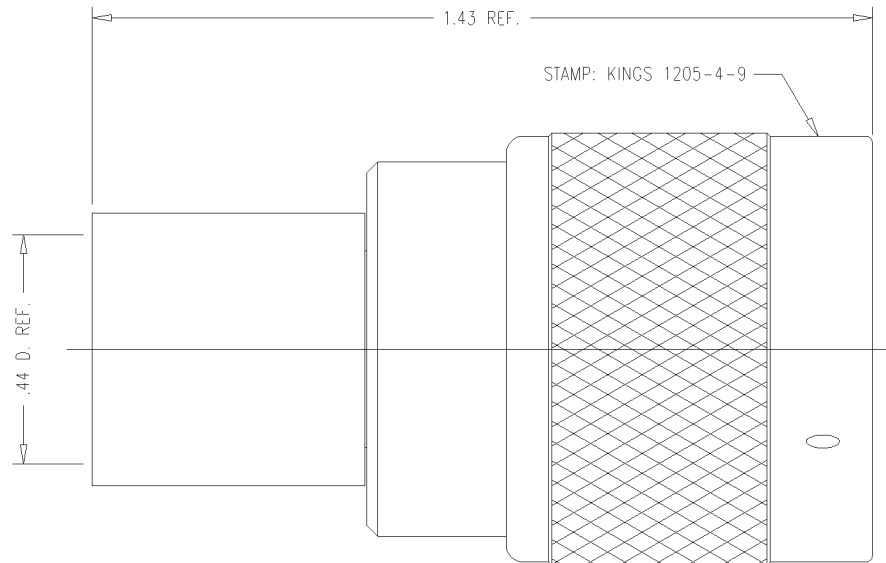

1205-4-9

REVISIONS

ISSUE	CHANGES
3	CN 35302 C REDRAWN KH 02/18/94
4	CN 37266 C PB 13 FEB 97

KAM3499

SCALE 4:1

APPROX SURFACE AREA

WAS: E-12343

USED ON

REF:

PLUG, N

DRAWN KH	DATE 02/18/94
DESIGN LI	DATE 02/22/94
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1205-4-9

NOTES:

1. FOR USE WITH BELDEN 9913 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-480.
3. FOR CABLE TRIMMING USE KTJ-137 & KTD-138.
4. FOR CRIMPING USE DIE KTH-2135.
5. INTERFACE PER MIL-STD-348, FIG. 304-1.
6. CENTER CONTACT SUPPLIED UNASSEMBLED.
7. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 - GASKETS: SILICONE RUBBER, QQ-R-765
 - OUTER CONTACT } PHOSPHOR BRONZE, QQ-B-750
 - C-RING }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
 - CENTER CONTACT GOLD PLATE PER MIL-G-45204
 - OUTER CONTACT SILVER PLATE PER QQ-S-365
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 1000 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz

GSD