

NOTES:

1. MATERIALS AND FINISHES:
 BODY, CLAMP NUT, COUPLING NUT
 OUTER CONTACT, BRAID CLAMP & WASHER - BRASS, NICKEL PLATING
 CONTACT - BRASS, SILVER PLATING
 INSULATOR - PTFE, NATURAL
 GASKETS - SILICONE RUBBER, RED
 WASHER - COPPER, NICKEL PLATING
 RETAINING RING - PHOSPHOR BRONZE, NATURAL

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM


3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 82-202, AND DATE CODE"





5. CABLE ASSEMBLY INSTRUCTIONS:

- STRIP CABLE AS SHOWN.
- SLIDE CLAMP NUT, WASHER, GASKET & BRAID CLAMP OVER CABLE SHEATH.
- COMB OUT THE BRAID AND FOLD OUT, TRIM EXCESS BRAID.
- SOLDER CABLE CENTER CONDUCTOR TO CENTER CONTACT.
- SLIDE SUB-ASSEMBLY TO THE REAR SIDE OF THE BODY AND TIGHTEN WITH PROPER SPANNER. MAKE SURE INTERFACE DIMENSIONS TO MEET.

6. SHOWS CABLE ENTRY DIMENSIONS.

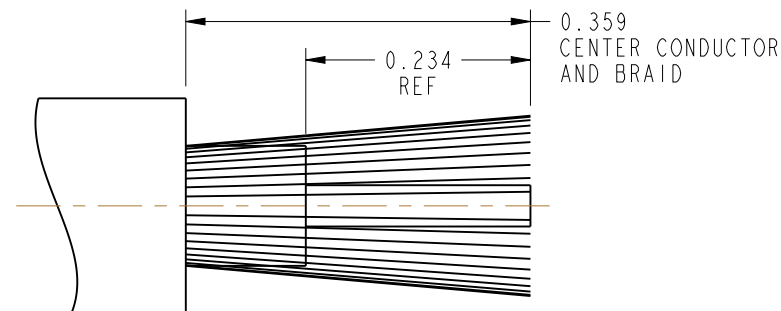

RECOMMENDED CABLE STRIPPING DIMENSIONS

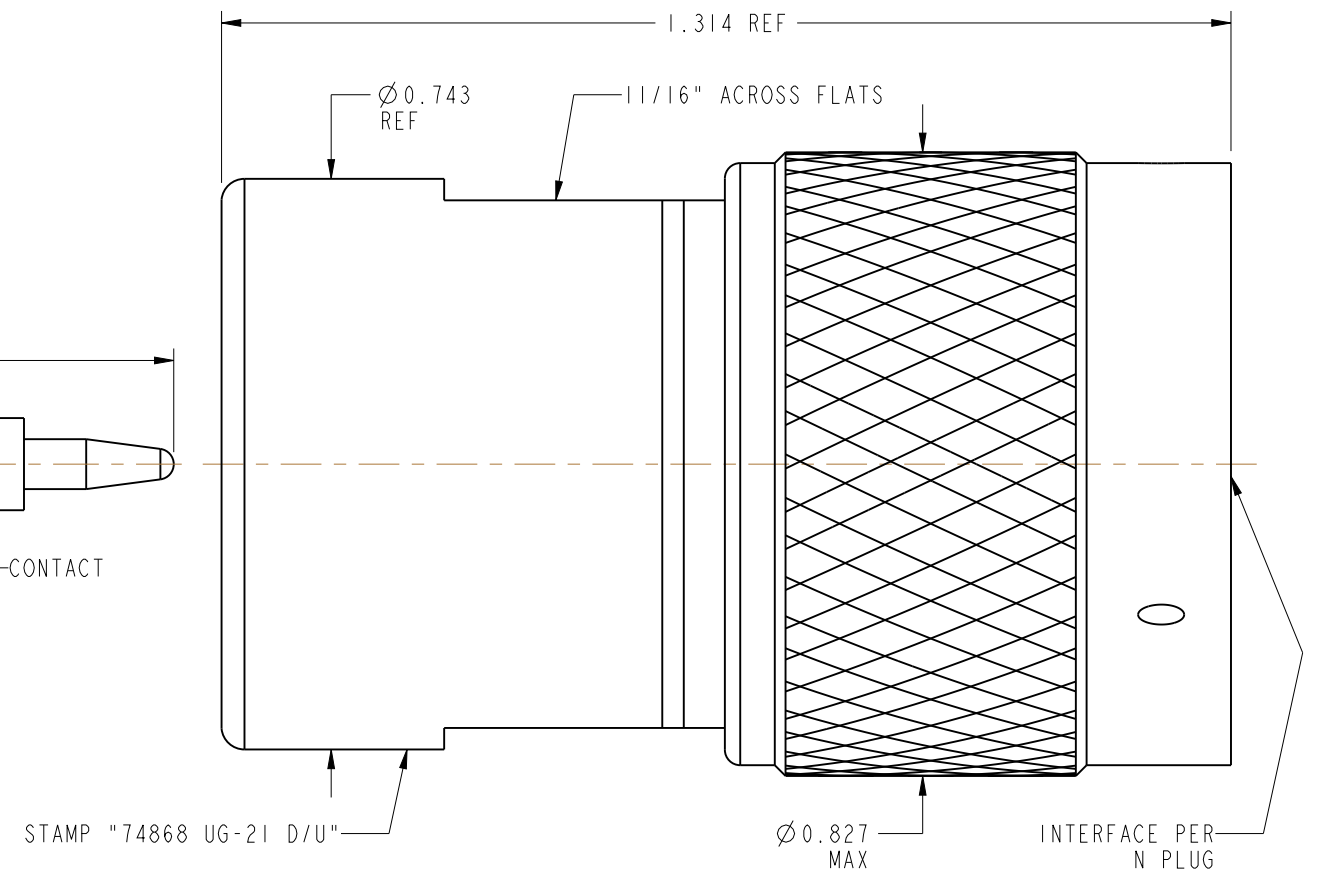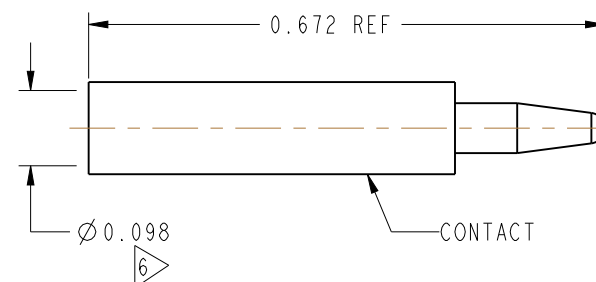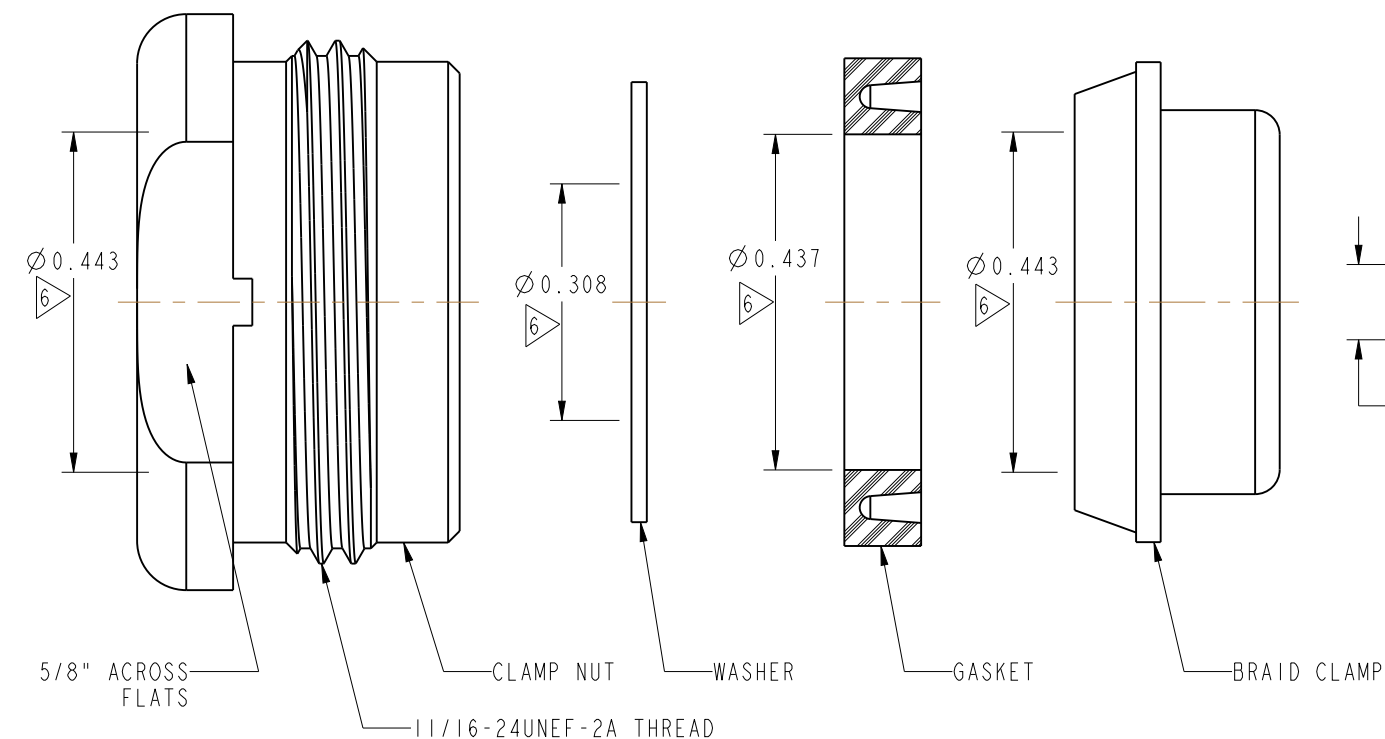

SCALE 1.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES REFERENCE 200X-280-115 MS 91236 (REV A) REQ - 10424 CONFIGURATION LEVEL: In Work FINISH	DRAWN CLEMENT DATE 26-Nov-13	TITLE N STR PLUG UG-21 D/U FOR RG8 CABLE GROUP SCALE: 4.0:1.0 SHEET 2 OF 2 DWG SIZE B REV Y	Amphenol RF www.amphenolrf.com DRAWING NO.82-202 ITEM NO.82-202 PART NO.82-202
		ENGINEER S.P. DATE 26-Jan-66		
		APPROVED K. CAPOZZI DATE 6/30/15		
		CAD FILE		