



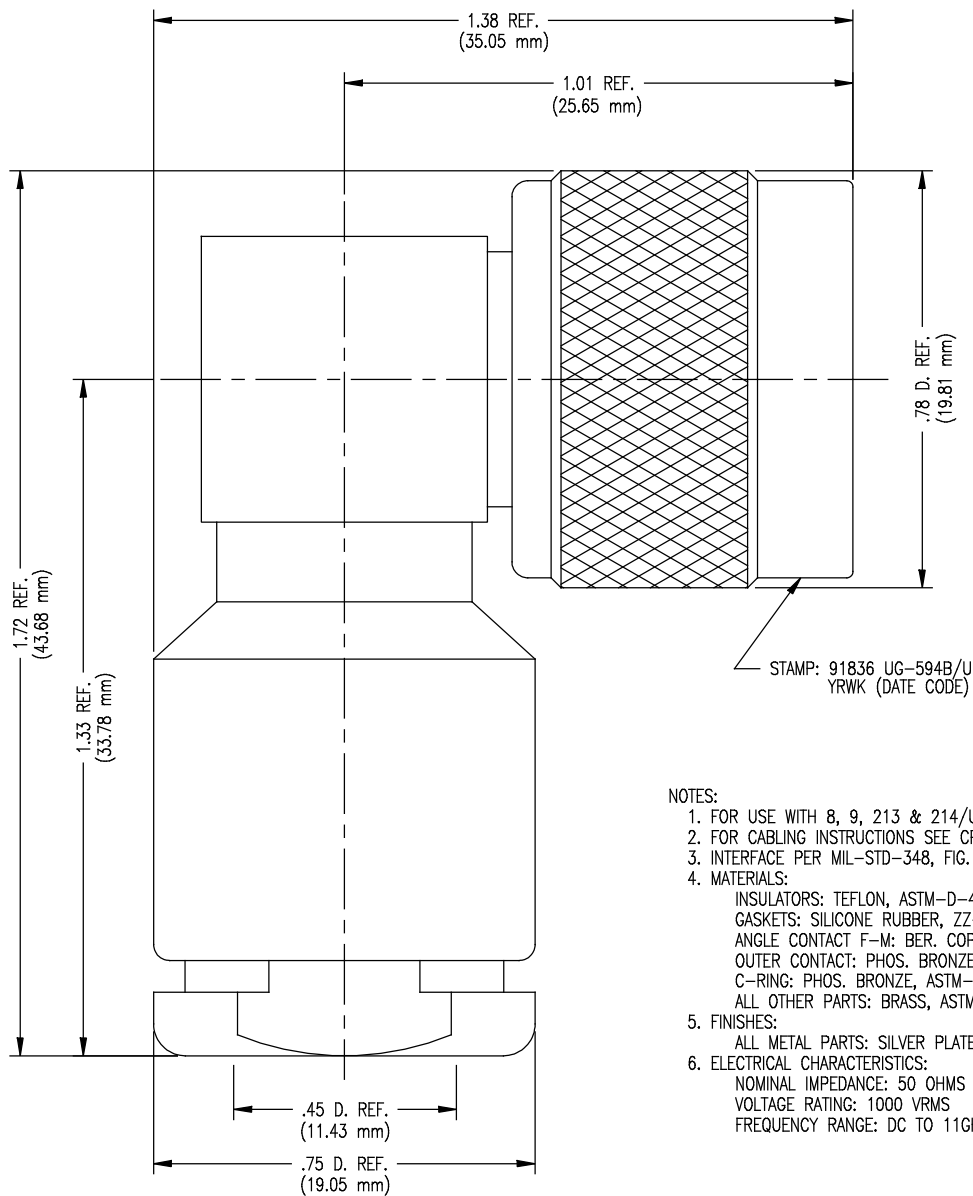

- NOTES:
1. FOR USE WITH 8, 9, 213 & 214/U CABLE.
 2. FOR CABLING INSTRUCTIONS SEE CP-1022.
 3. INTERFACE PER MIL-STD-348, FIG. 304-1.
 4. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-4894
 GASKETS: SILICONE RUBBER, ZZ-R-765
 ANGLE CONTACT F-M: BER. COP., ASTM-B-196
 OUTER CONTACT: PHOS. BRONZE, ASTM-B-103
 C-RING: PHOS. BRONZE, ASTM-B-103
 ALL OTHER PARTS: BRASS, ASTM-B16
 5. FINISHES:
 ALL METAL PARTS: SILVER PLATE PER QQ-S-365
 6. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 1000 VRMS
 FREQUENCY RANGE: DC TO 11GHz

.03 D. 3 HOLES REF.
(.76 mm)

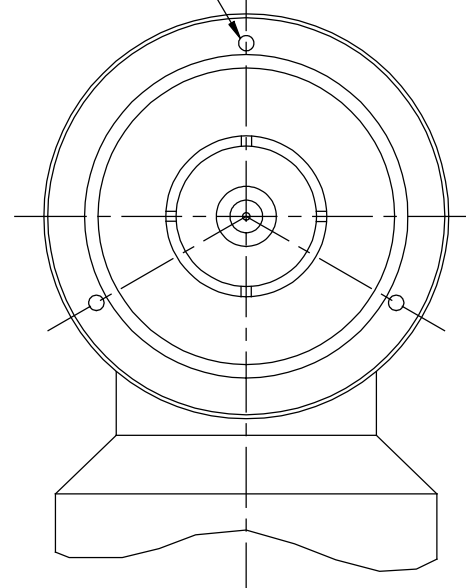

SD

SD

UG-594B/U

REVISIONS	
ISSUE	CHANGES
1	CN 6733 A VS 10/29/68
2	CN 13578 A JL 07/11/74
3	CN 17440 C JHP 06/15/77
4	CN 26561 D EAJ 11/16/84
5	CN 37914 E REDRAWN TML 10/11/99

SCALE 4:1	
APPROX SURFACE AREA	
KN-57-07	
USED ON	
REF:	
PLUG, ANGLE, N	
DRAWN SD	DATE 10/16/85
DESIGN	DATE
APPR. MJB	DATE 10/21/85
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	
UG-594B/U	