


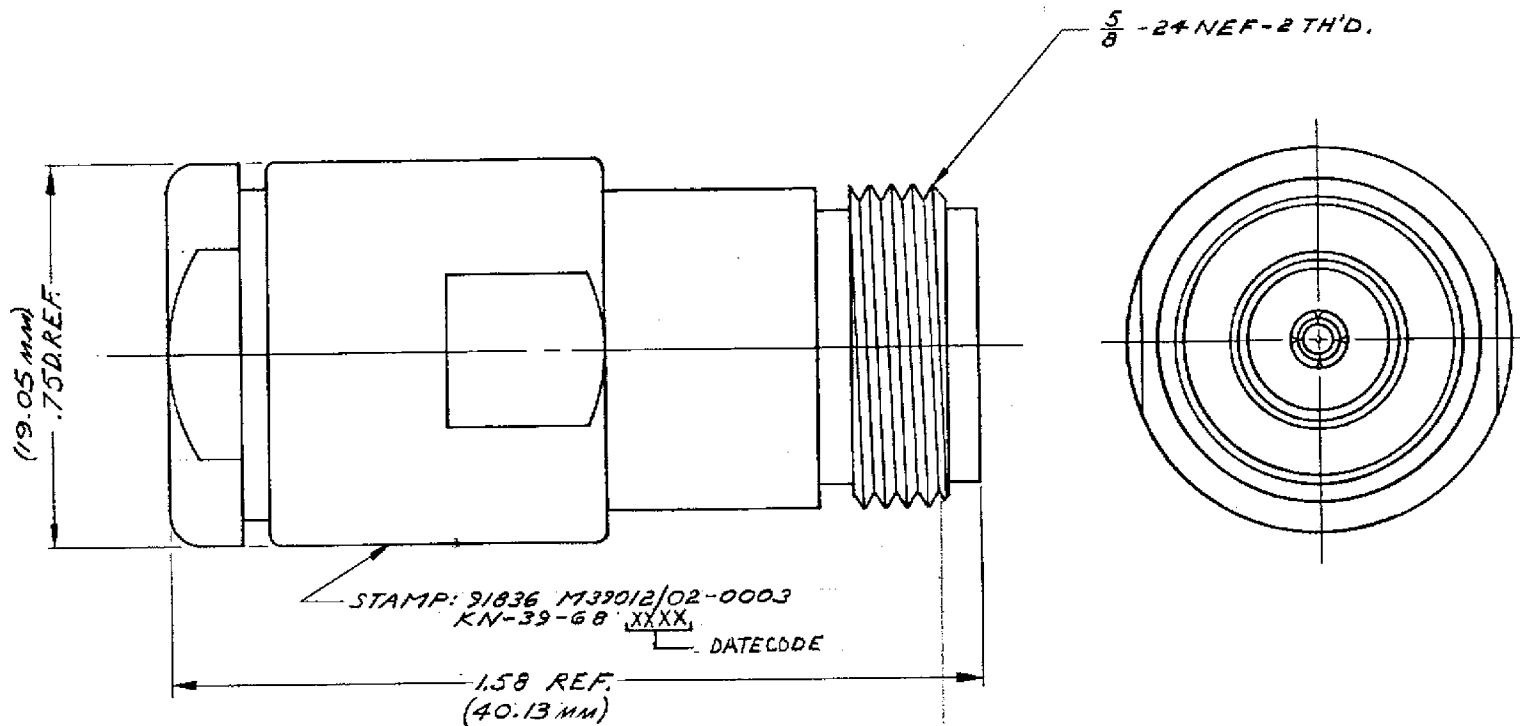

NOTES:

1. FOR USE WITH RG-8,9,213 & 214 CABLE GROUPS.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^\circ 30'$
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

M39012/02-0003

S-D

REVISIONS

ISSUE	CHANGES
5	CN 23169 E JEP 13 APR 82
6	CN 32243 A LNM 1 JUN 90

S-D

KN-39-68

REP: SUPERSEDES
UG-1186A/U

FINISH

SPEC.

MATL

SPEC.

N JACK

DRAWN HLA DATE 8 APR 70
APPR. DAM DATE 28 AUG 70

KINGS ELECTRONICS
40 HARBORDALE ROAD
TUCKAHOE, N. Y. 10707

M39012/02-0003

ITEM	REQ'D	DESCRIPTION	DRAWING NO.
------	-------	-------------	-------------