
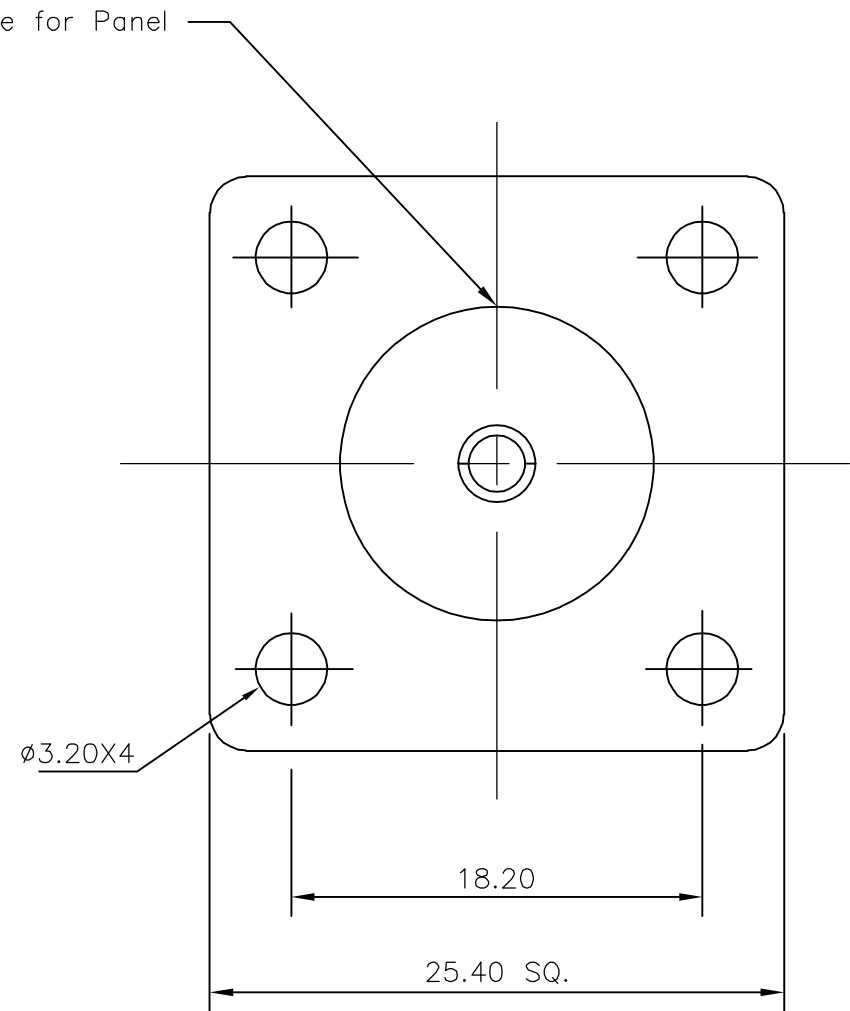


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION			DATE	APVD
					DWN	
	C	ECR-05-011509			21SEP05	JMS FWK

NOTES:

- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Ag PLATING
4. ELECTRICAL CHARACTERISTICS
FREQUENCY RANGE: DC - 11 GHz
NOMINAL IMPEDANCE: 50 Ohm
INSULATION RESISTANCE: 5000 MOhm
WORKING VOLTAGE: 1000 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 2500 Volts RMS Max
CONTACT RESISTANCE: 1.00 mOhm Max
CENTRE CONTACT: 1.00 mOhm Max
OUTER CONTACT: N/A
VSWR @ xGHz: N/A
INSERTION LOSS xdb: N/A
5. MECHANICAL CHARATERISTICS
DURABILITY: 500 Cycles Min
6. ENVIRONMENTAL CHARACTERISTICS
OPERATING TEMPERATURE: -65 to +165 DegC

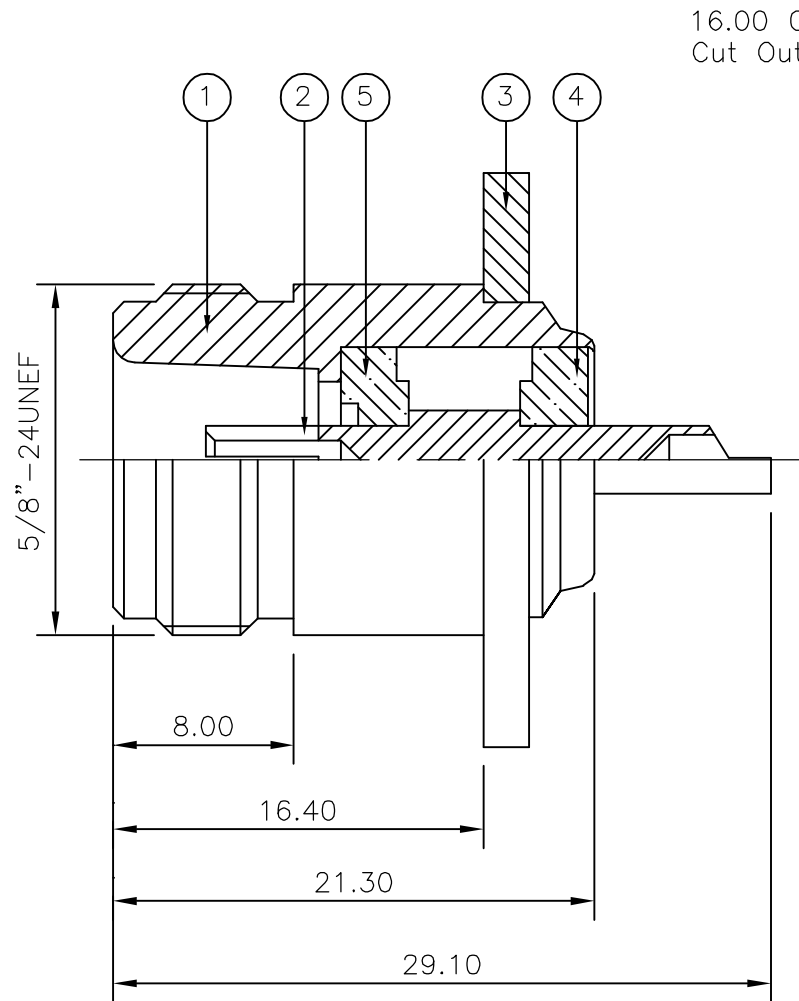

		1	1	PTFE	INSULATION	5
		1	1	PTFE	INSULATION	4
		1	1	BRASS	HOUSING	3
		1	1	BRASS	CONTACT	2
		1	1	BRASS	BODY	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM
QUANTITY PER ASSY				PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH SEE TABLE

DWN J.SANDWELL 21SEP05
CHK S.PARLOW 21SEP05
APVD F.WHEELER-KING 21SEP05
PRODUCT SPEC 108-3435
APPLICATION SPEC -
WEIGHT -

tyco
Electronics

Tyco Electronics Corporation
Bideford EX39 4HE

NAME
TYPE-N PANEL SOCKET 50 OHM

SIZE A3 CAGE CODE 00779 DRAWING NO C-1337418 RESTRICTED TO -

CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV C