

- NOTES:
1. MATERIALS AND FINISHES:  
BODY - BRASS, NICKEL PLATED.  
CONTACT - BERYLLIUM COPPER, SILVER PLATED  
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:  
A. IMPEDANCE: 50 OHM

3. MECHANICAL:  
A. DURABILITY: 500 CYCLES MIN.  
B. TEMPERATURE RANGE: -65°C TO +165°C

4. CONNECTOR IS IP-67 RATED IN MATED CONDITION
- THIRD ANGLE PROJ.
- REV

DESCRIPTION

DATE

ECO

APPR

B

SEE SHEET 1

20-Aug-04

C

SEE SHEET 1

01-Sep-04

D

SEE SHEET 1

13-Apr-06

SH

Y

REDRAWN TO UPDATE FORMAT/RD-DM10031001T1

17-Mar-10

47700

SH

AA

STAMP "AMPHENOL" WAS "74868"\RD-DM11120601R3

26-Dec-11

48845

SH



AB

ADDED NOTE 4

28-Feb-14

49899

SH

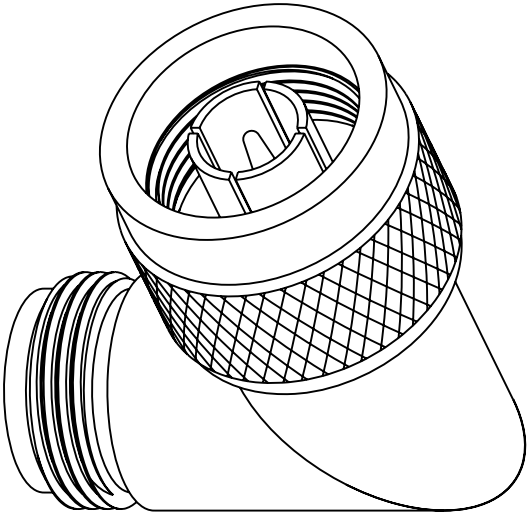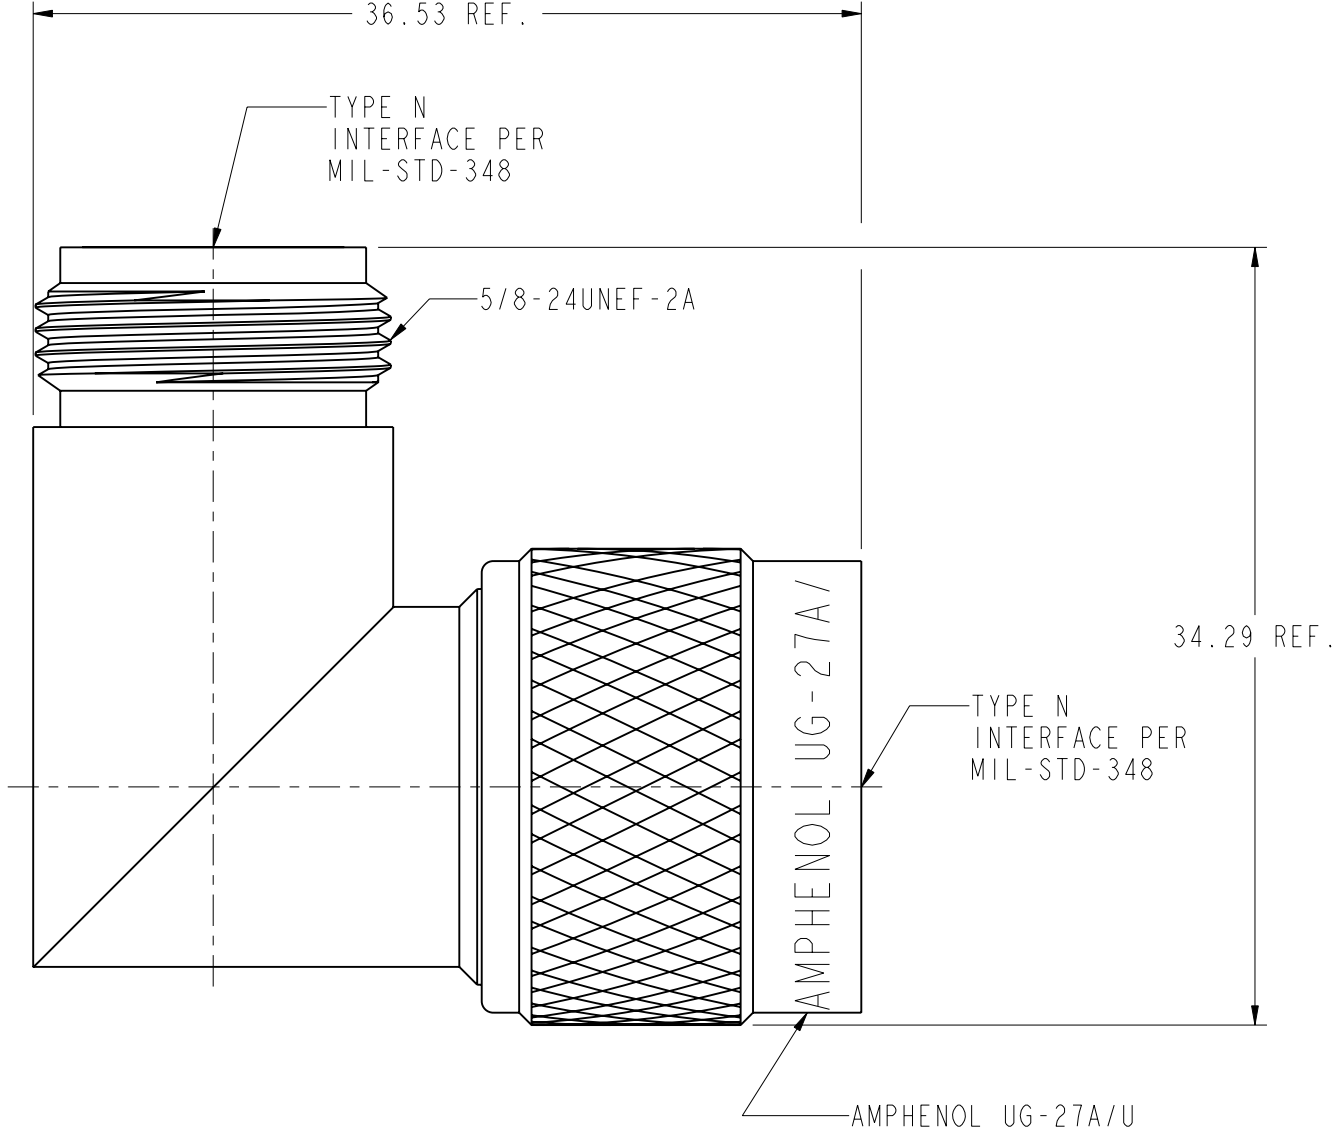

SCALE 2.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm    0.5 - 6mm ± 0.1mm    6 - 30mm ± 0.2mm    30 - 120mm ± 0.3mm    ANGLES ±1°	MATERIAL	DRAWN S.DUAN	DATE 28-Feb-14	TITLE TYPE 'N' ADAPTOR RIGHT ANGLE UG-27A/U		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
		ENGINEER S.P	DATE 07-Mar-66				
	REFERENCE	APPROVED S.HSIEH	DATE 28-Feb-14	SCALE: 3.0:1.0	SHEET 2 OF 2	DRAWING NO.82-64	
	FINISH	CAD FILE		DWG SIZE B	REV AB	ITEM NO.82-64	
						PART NO.82-64	