

MIL-STD-348B
DRAFT DATED 3 FEBRUARY 2009

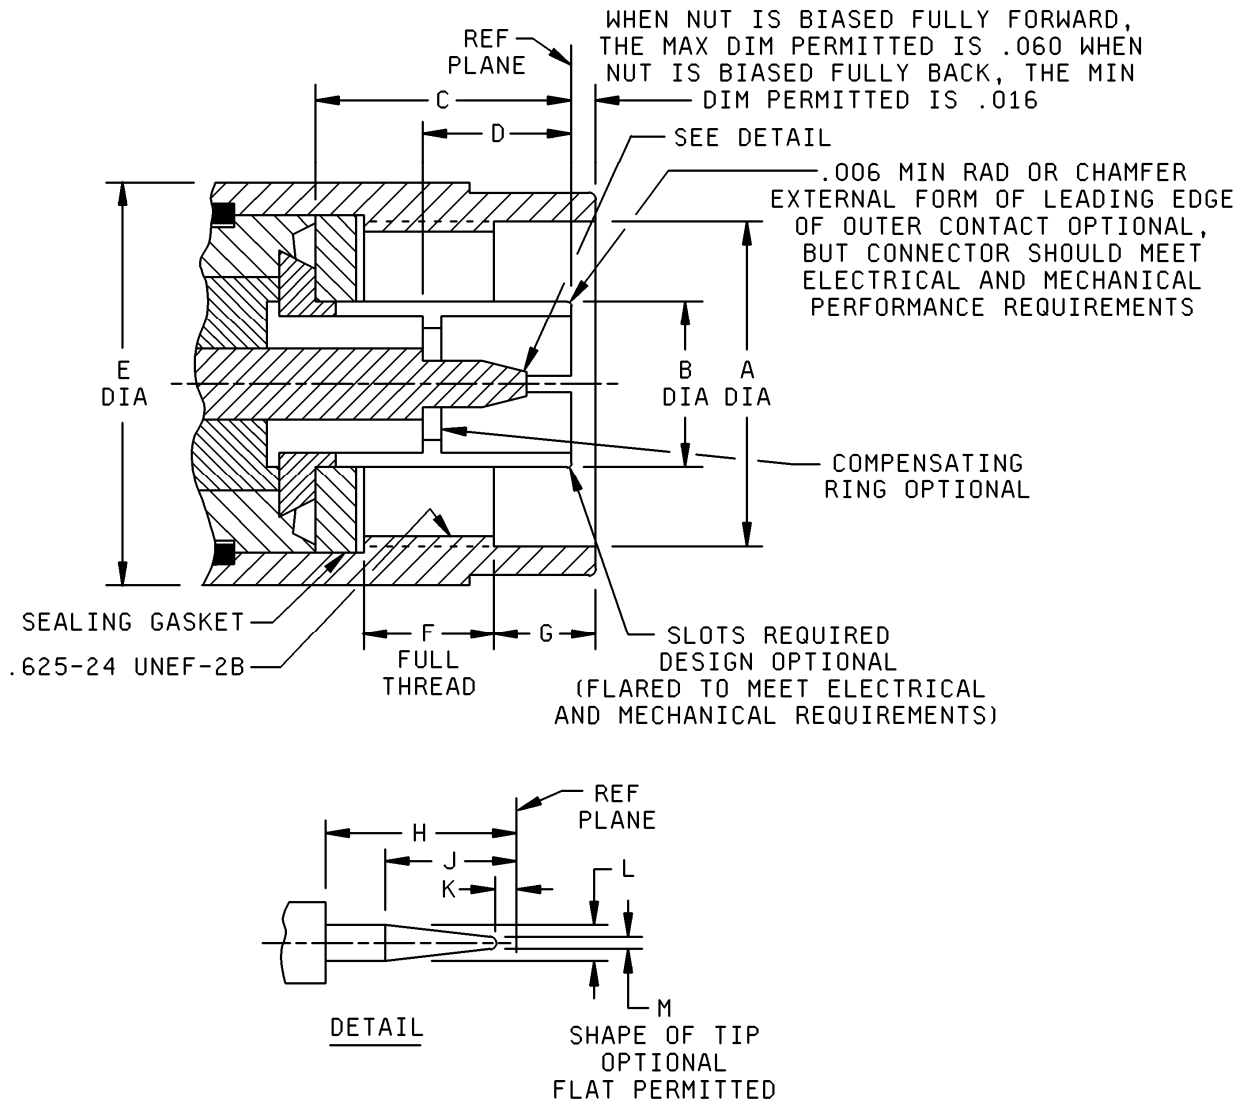


FIGURE 22. Interface, series N, pin contact.

MIL-STD-348B
DRAFT DATED 3 FEBRUARY 2009

Dim. Ltr.	Inches (mm)	
	Min.	Max.
A Dia.	.630 (16.00)	-----
B Dia.	-----	.330 (8.38)
C	.398 (10.11)	.412 (10.46)
D	.210 (5.33)	.230 (5.84)
E Dia.	-----	.827 (21.01)
F	.177 (4.50)	-----
G	.158 (4.01)	.168 (4.27)
H	.210 (5.33)	-----
J	.110 (2.79)	.140 (3.56)
K	.003 (.08)	-----
L	.063 (1.60)	.066 (1.68)
M	-----	.010 (0.25)

NOTE:

1. This interface shall meet the gauge requirements as specified in MIL-PRF-39012/1.

FIGURE 22. Interface, series N, pin contact - Continued.

MIL-STD-348B
DRAFT DATED 3 FEBRUARY 2009

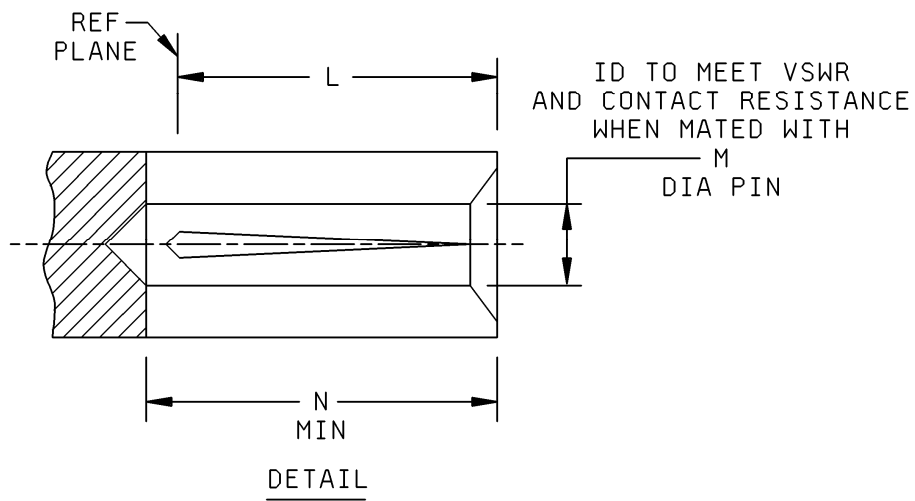
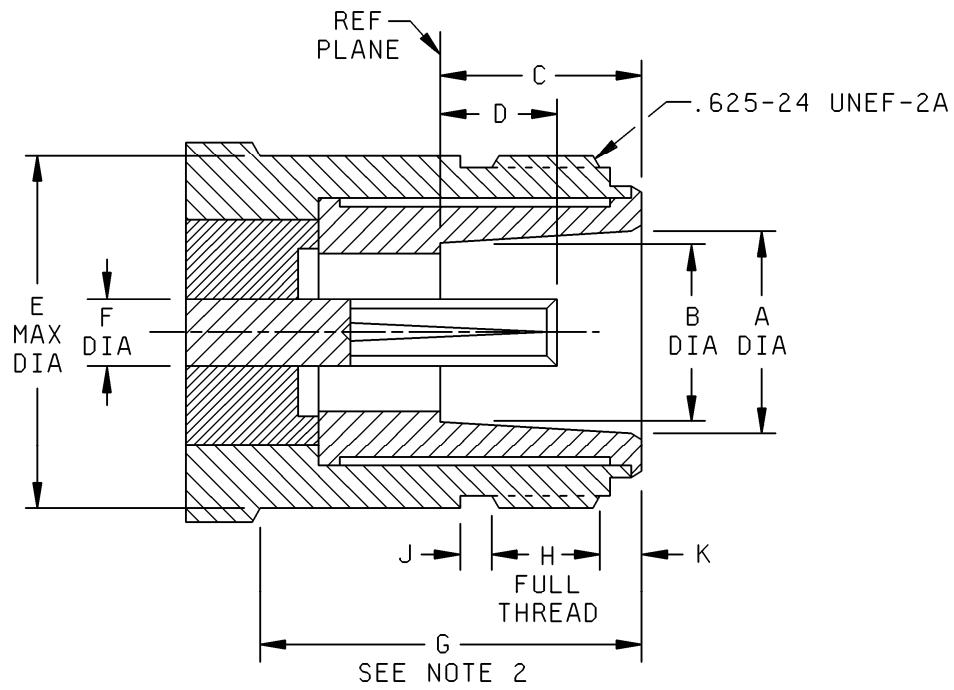


FIGURE 23. Interface, series N, socket contact.

MIL-STD-348B
DRAFT DATED 3 FEBRUARY 2009

Dim. Ltr.	Inches (mm)	
	Min.	Max.
A	.336 (8.53)	.344 (8.74)
B	.316 (8.03)	.320 (8.13)
C	.356 (9.04)	.362 (9.19)
D	.187 (4.75)	.207 (5.26)
E	-----	.627 (15.93)
F	.119 (3.02)	.124 (3.15)
G	.422 (10.72)	-----
H	.172 (4.37)	.202 (5.13)
J	.047 (1.19)	.077 (1.96)
K	.047 (1.19)	.077 (1.96)
L	.187 (4.75)	.207 (5.26)
M	.063 (1.60)	.066 (1.68)
N	.210 (5.33)	-----

NOTES:

1. This interface shall meet the gauge requirements as specified in MIL-PRF-39012/2.
2. Clearance for mating connector coupling nut.

FIGURE 23. Interface, series N, socket contact - Continued.