







1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].

3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.


4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.

5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

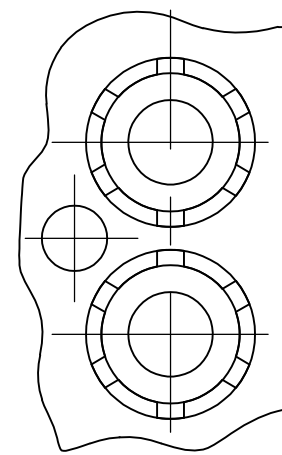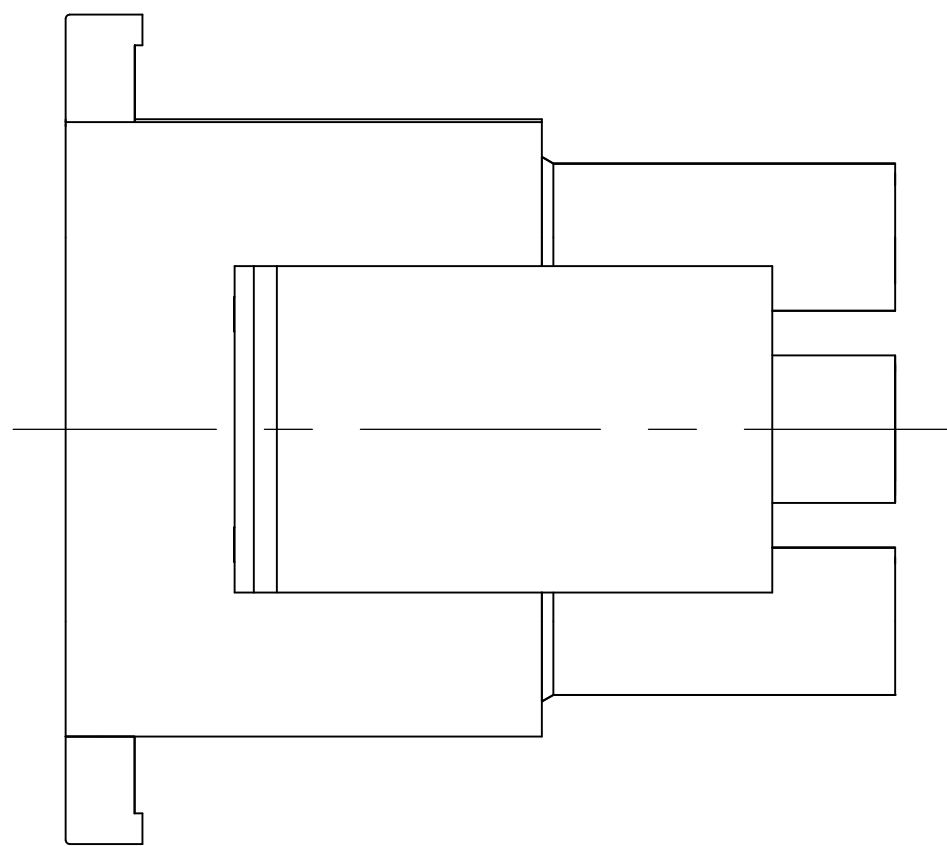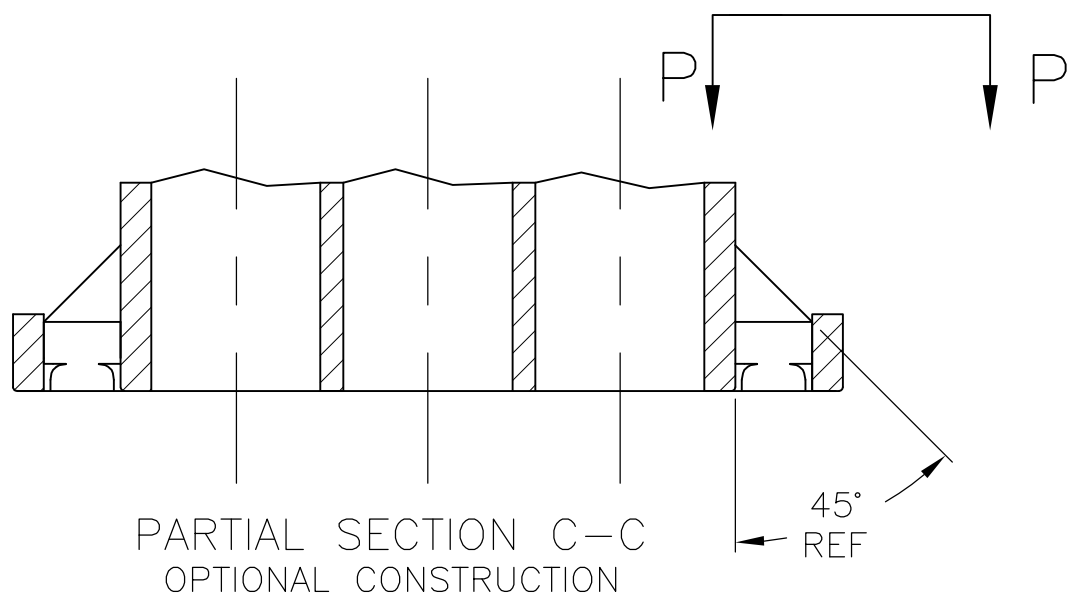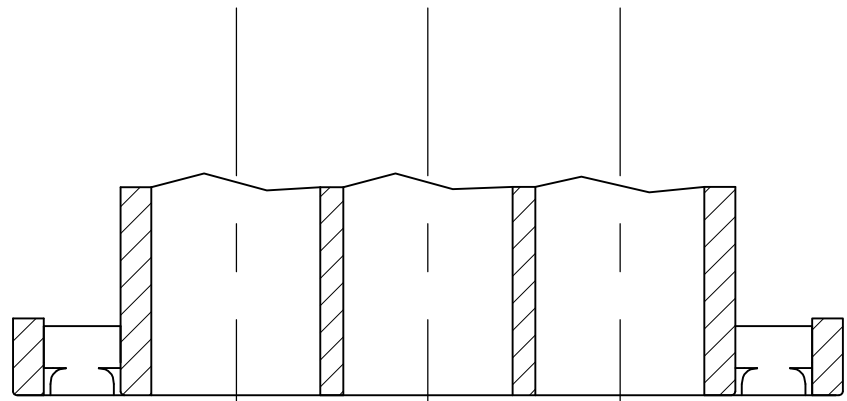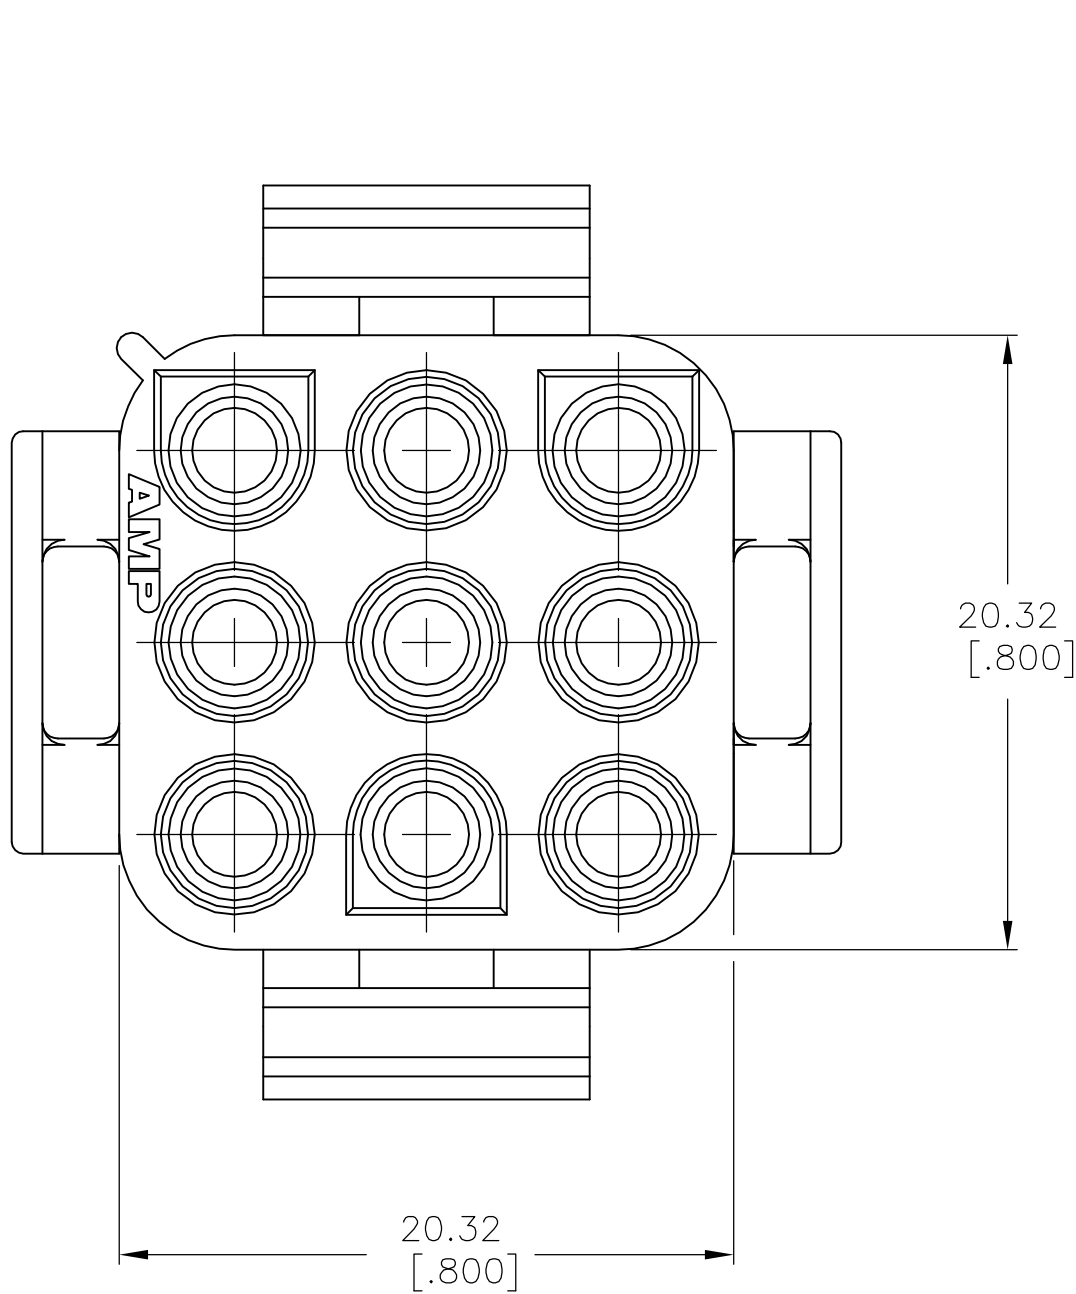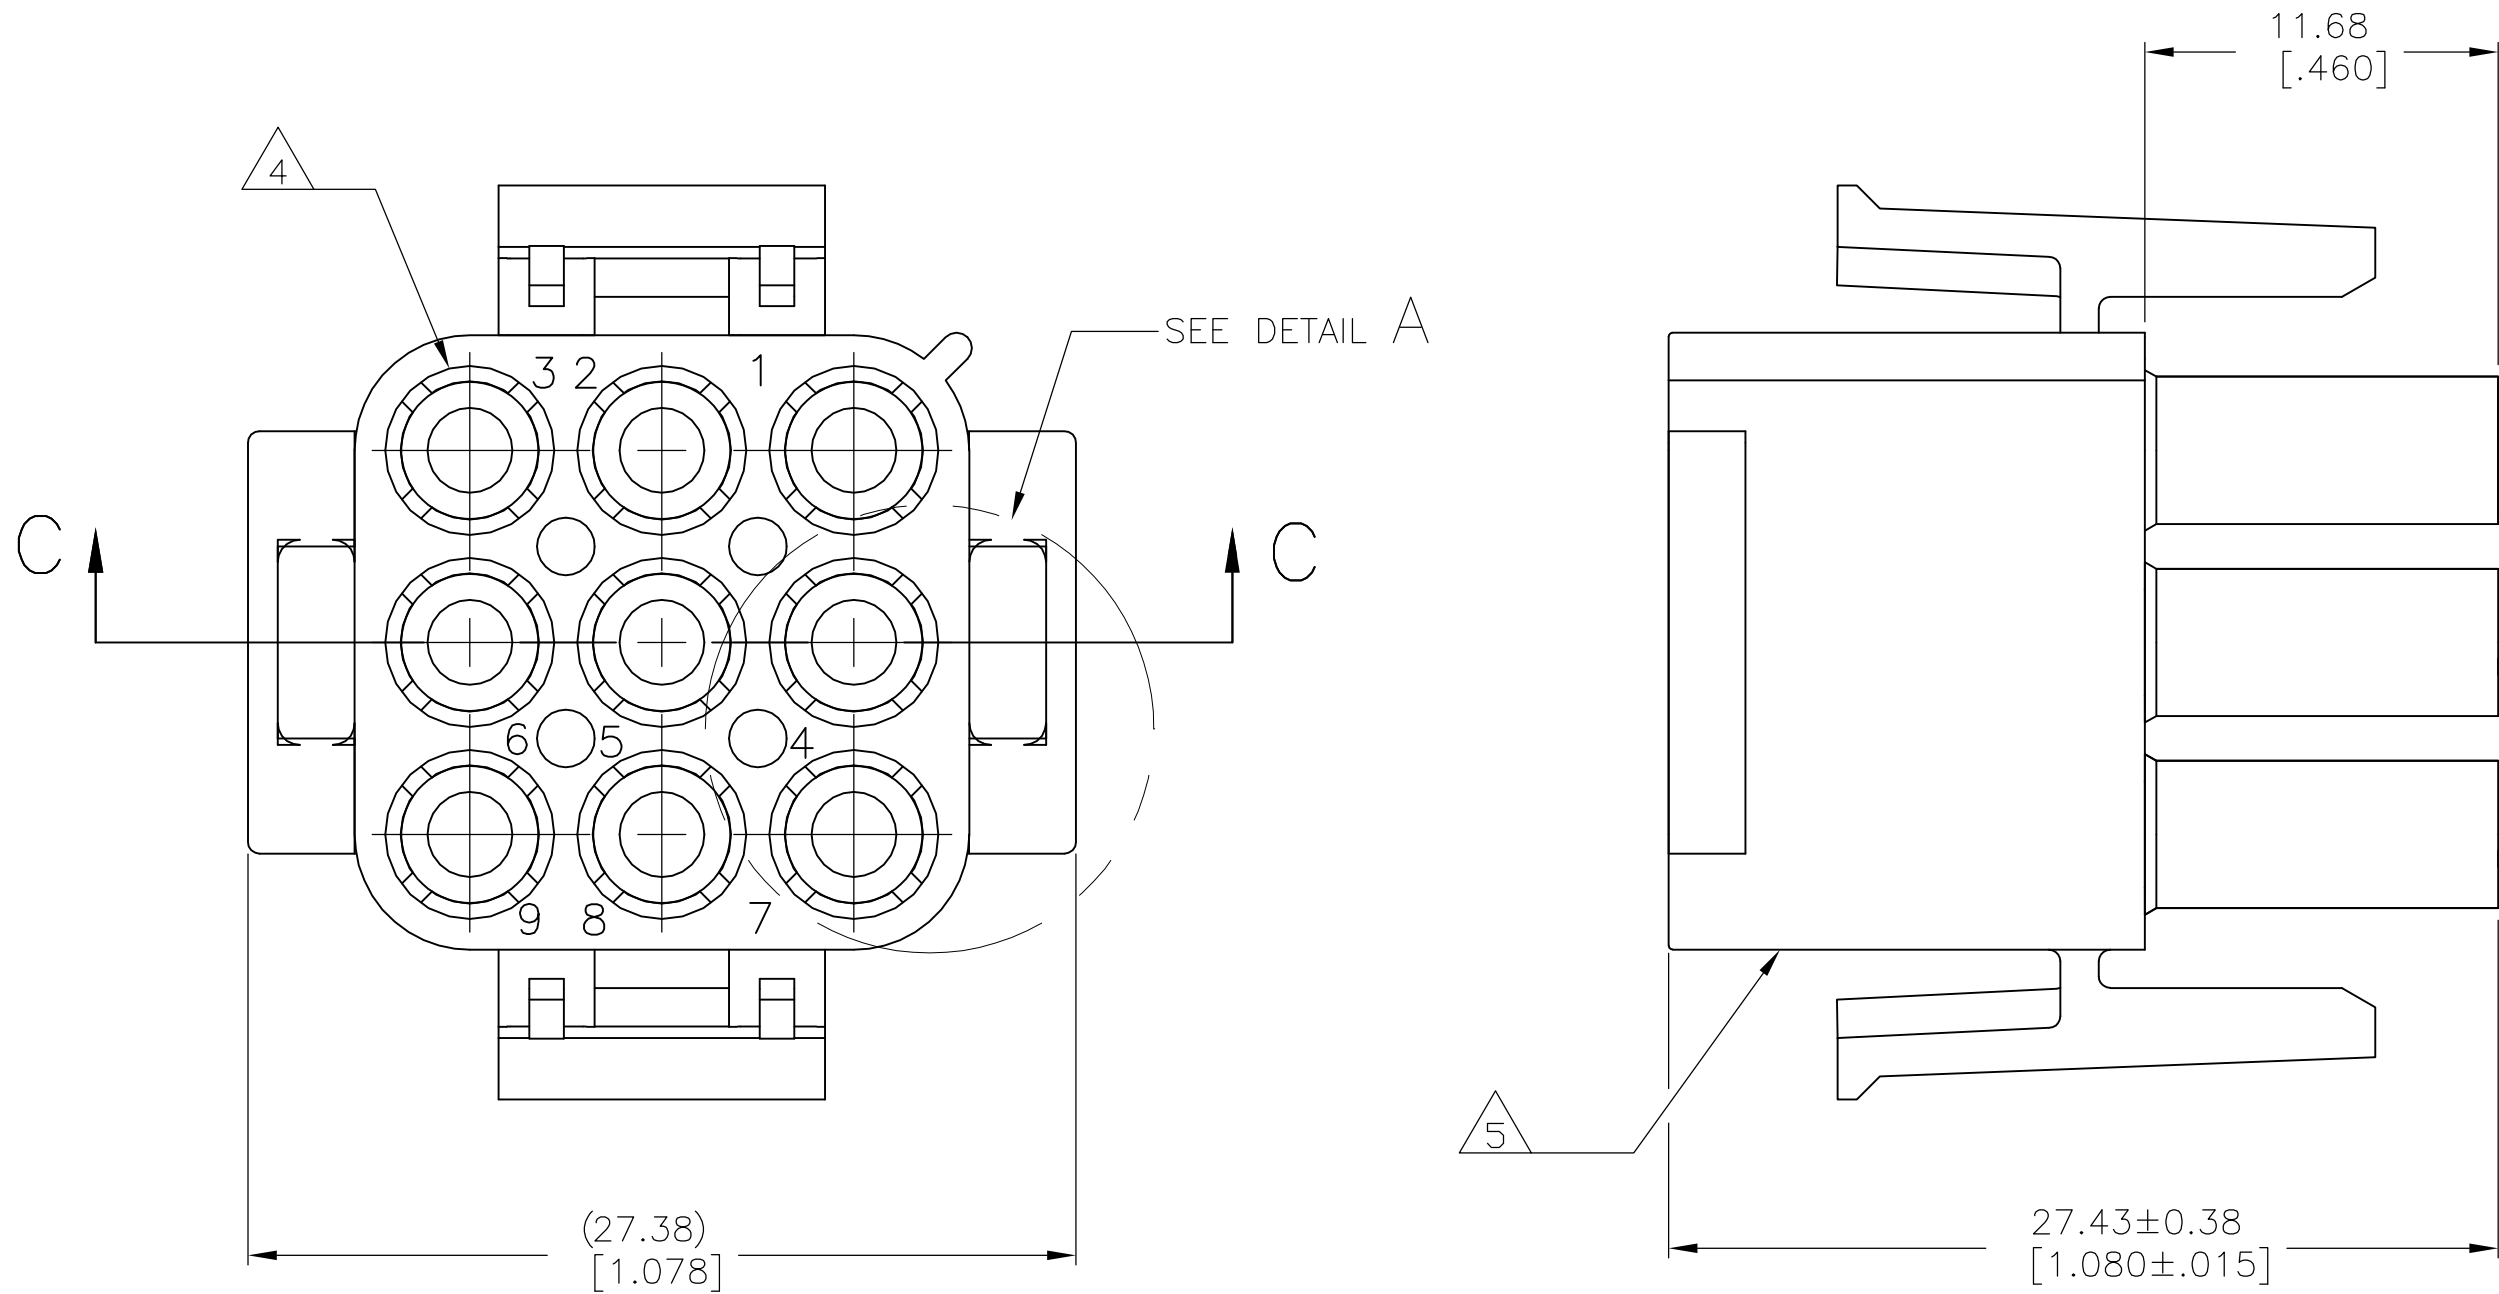


OPTIONAL CONSTRUCTIONS

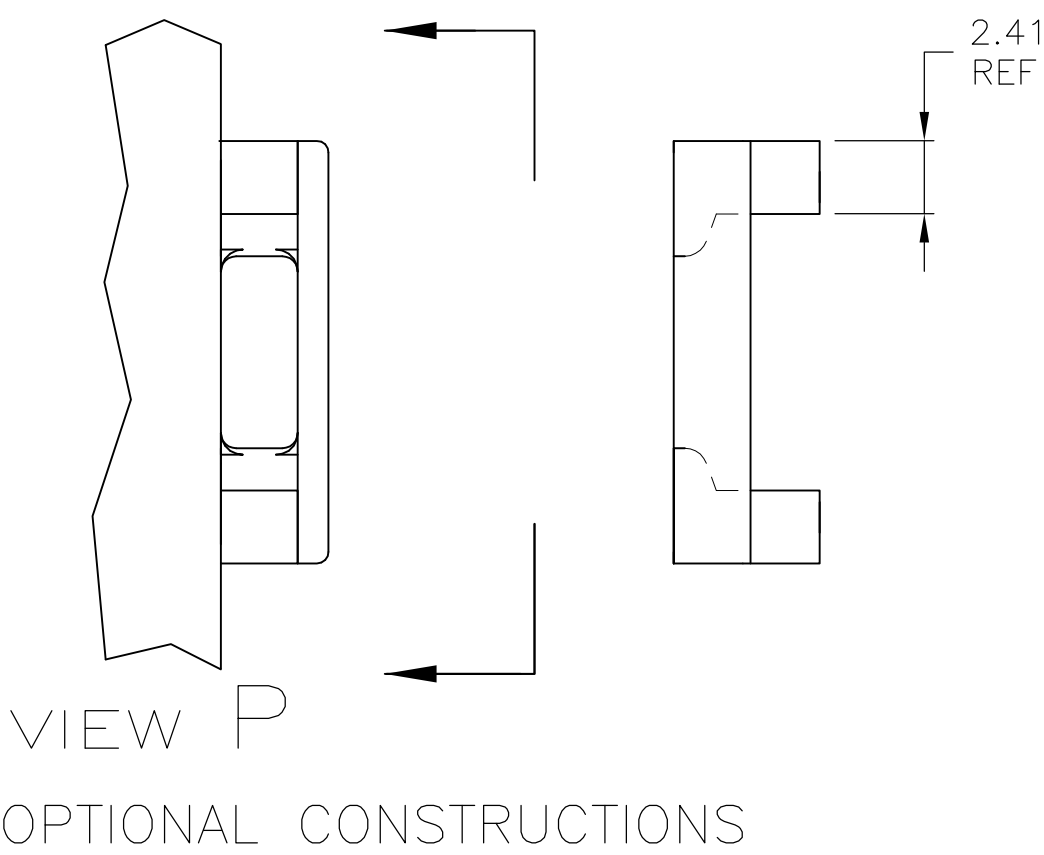


6	SUPERCEDED BY 1-480706-0	OBSOLETE	BLACK	1-480706-9
			GRAY	1-480706-8
			BLUE	1-480706-6
			GREEN	1-480706-5
			YELLOW	1-480706-4
			ORANGE	1-480706-3
			RED	1-480706-2
			BROWN	1-480706-1
			NATURAL	1-480706-0
			COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01SEP04	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 01SEP04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 01SEP04	PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	
0. PLC ± -		PRODUCT SPEC	RESTRICTED TO	
1. PLC ± -		APPLICATION SPEC	SIZE	
2. PLC ± 0.13 [.005]		WEIGHT	CAGE CODE	
3. PLC ± -		A1 00779		DRAWING NO
4. PLC ± -		CUSTOMER DRAWING		480706
ANGLES ± 0°30'		SCALE		1 OF 2
FINISH -		SHEET		REV
MATERIAL NYLON, UL94V-2		4:1		AL1

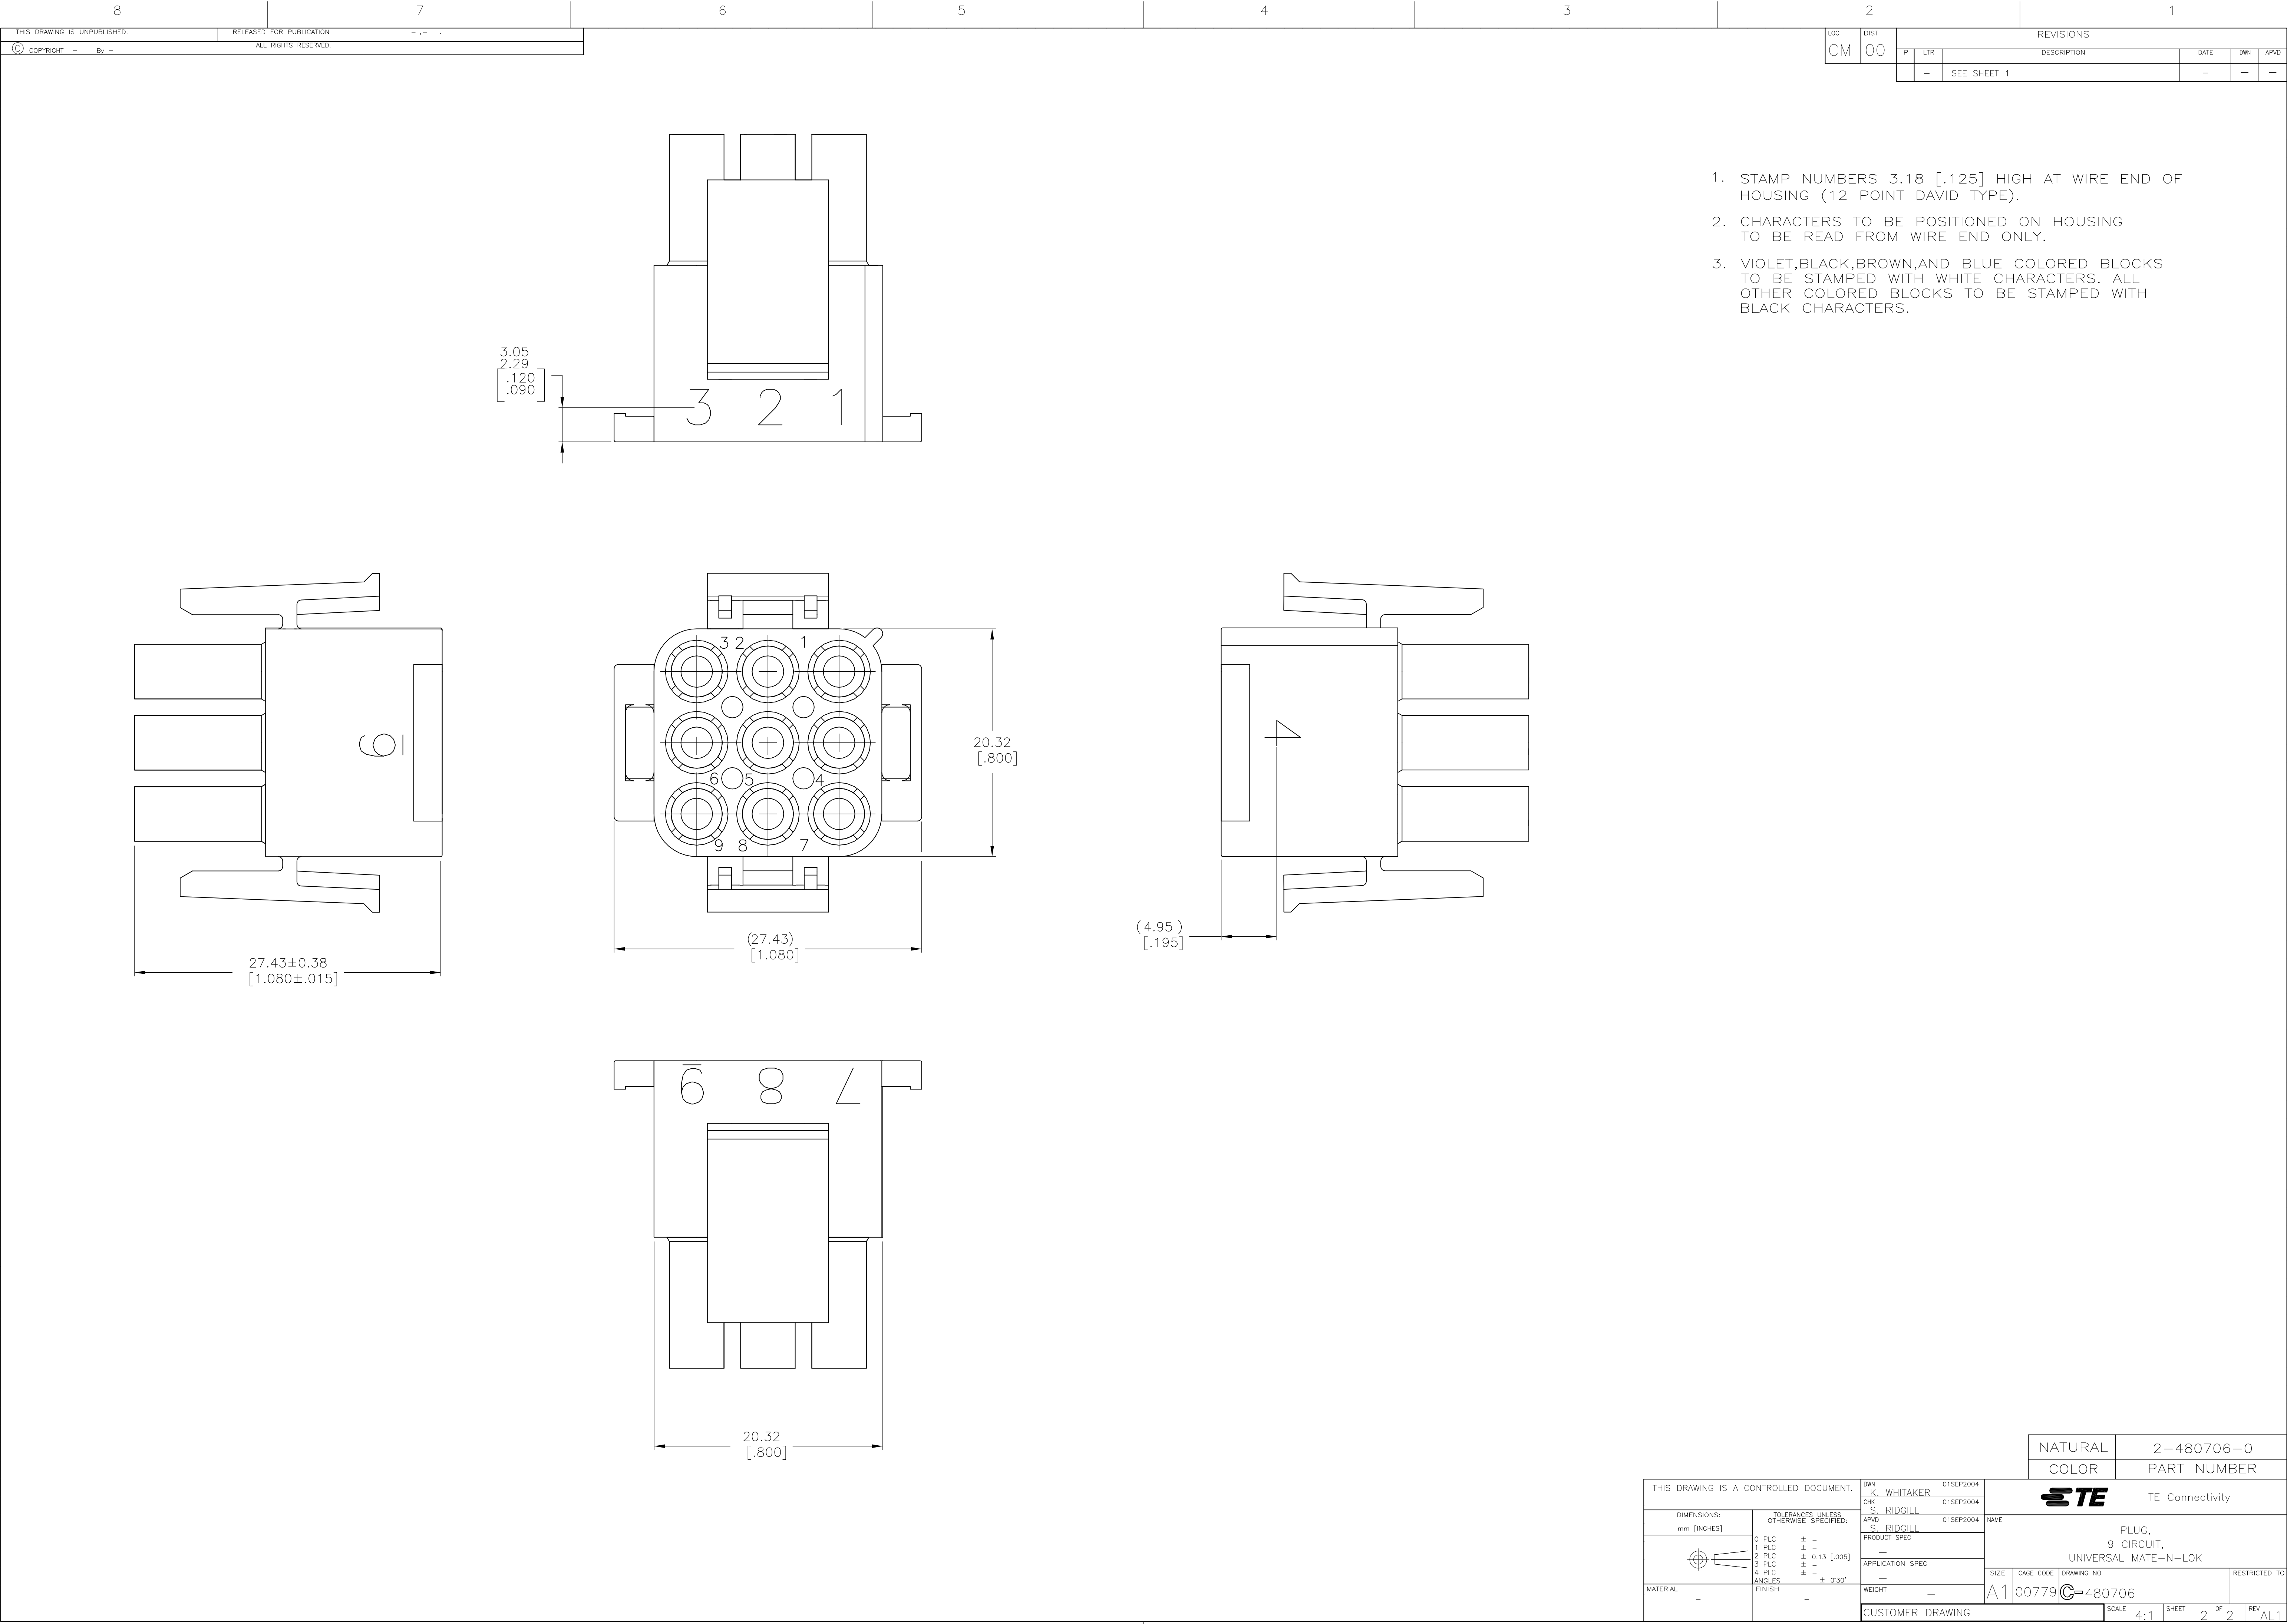

1. STAMP NUMBERS 3.18 [.125] HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	01SEP2004	 TE Connectivity	
		CHK S. RIDGILL	01SEP2004		
DIMENSIONS: mm [INCHES]		APVD S. RIDGILL	01SEP2004	NAME	PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		RESTRICTED TO	
0. PLC ± — 1. PLC ± — 2. PLC ± 0.13 [.005] 3. PLC ± — 4. PLC ± — ANGLES ± 0°30' FINISH —		APPLICATION SPEC		SIZE	CAGE CODE
MATERIAL —		WEIGHT —		DRAWING NO	
		CUSTOMER DRAWING		A1 00779 C=480706	
				SCALE	4:1
				SHEET	2 OF 2
				REV	AL