


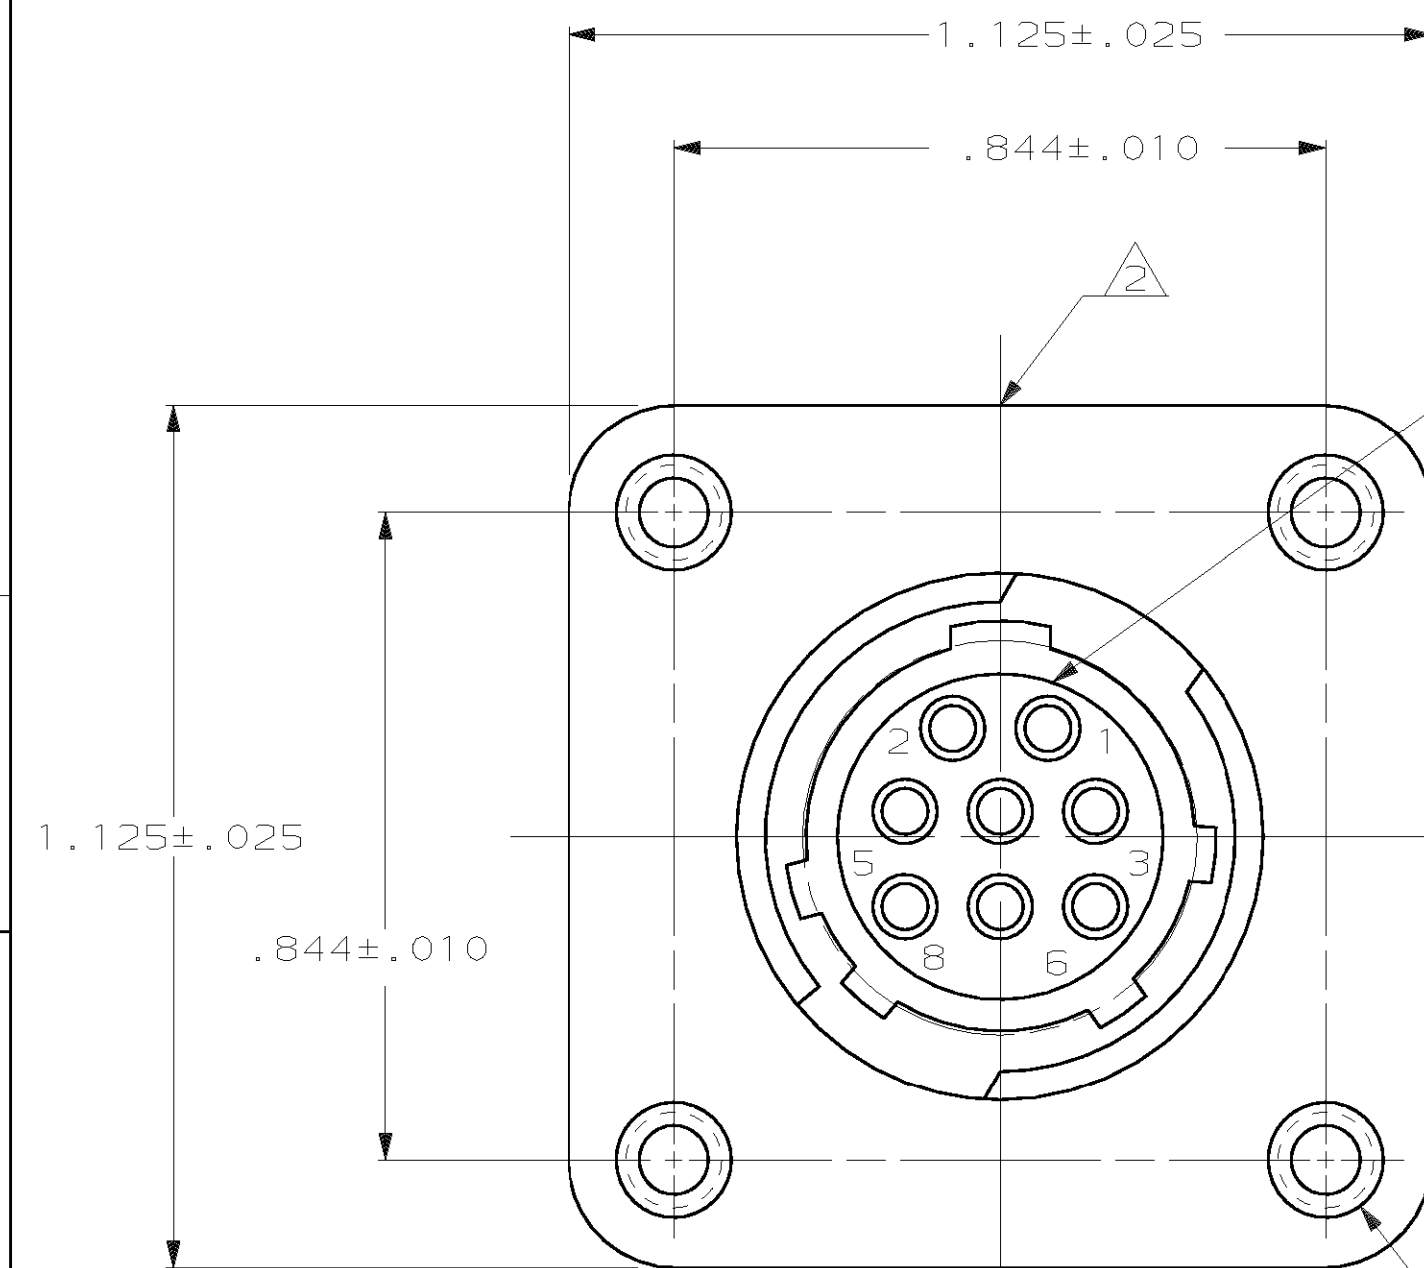


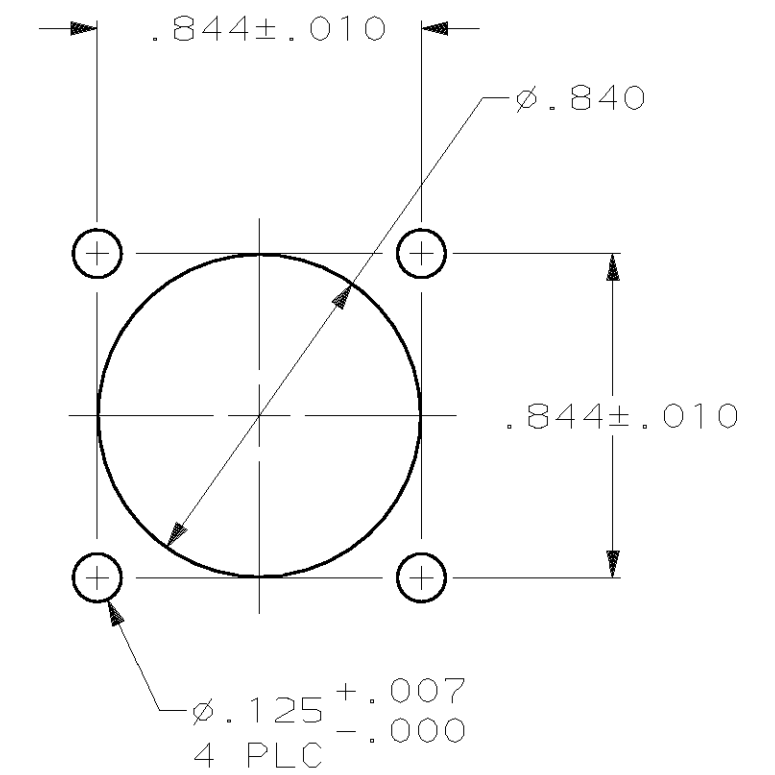

-PERIPHERAL SEAL
BONDED IN PLACE
SEE TABLE

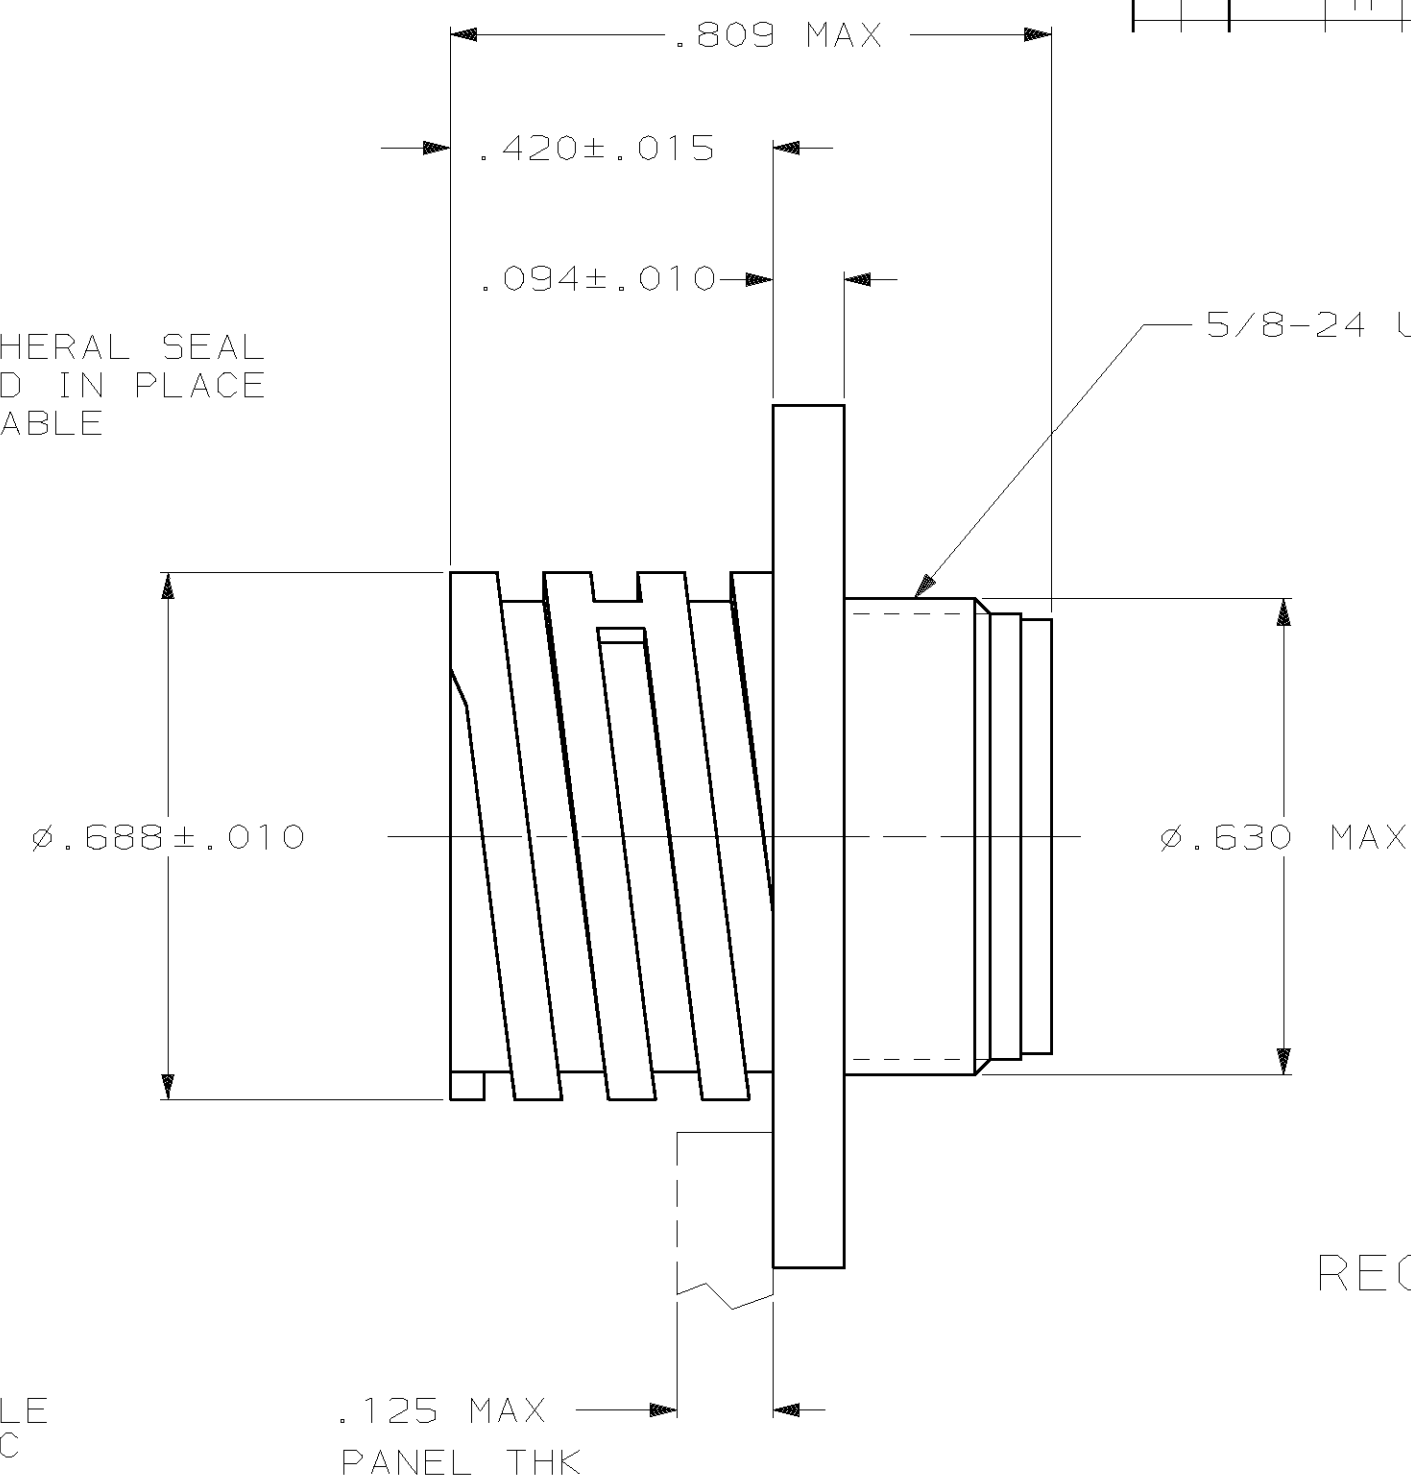

RECOMMENDED PANEL CUTOUT
SCALE 2:1

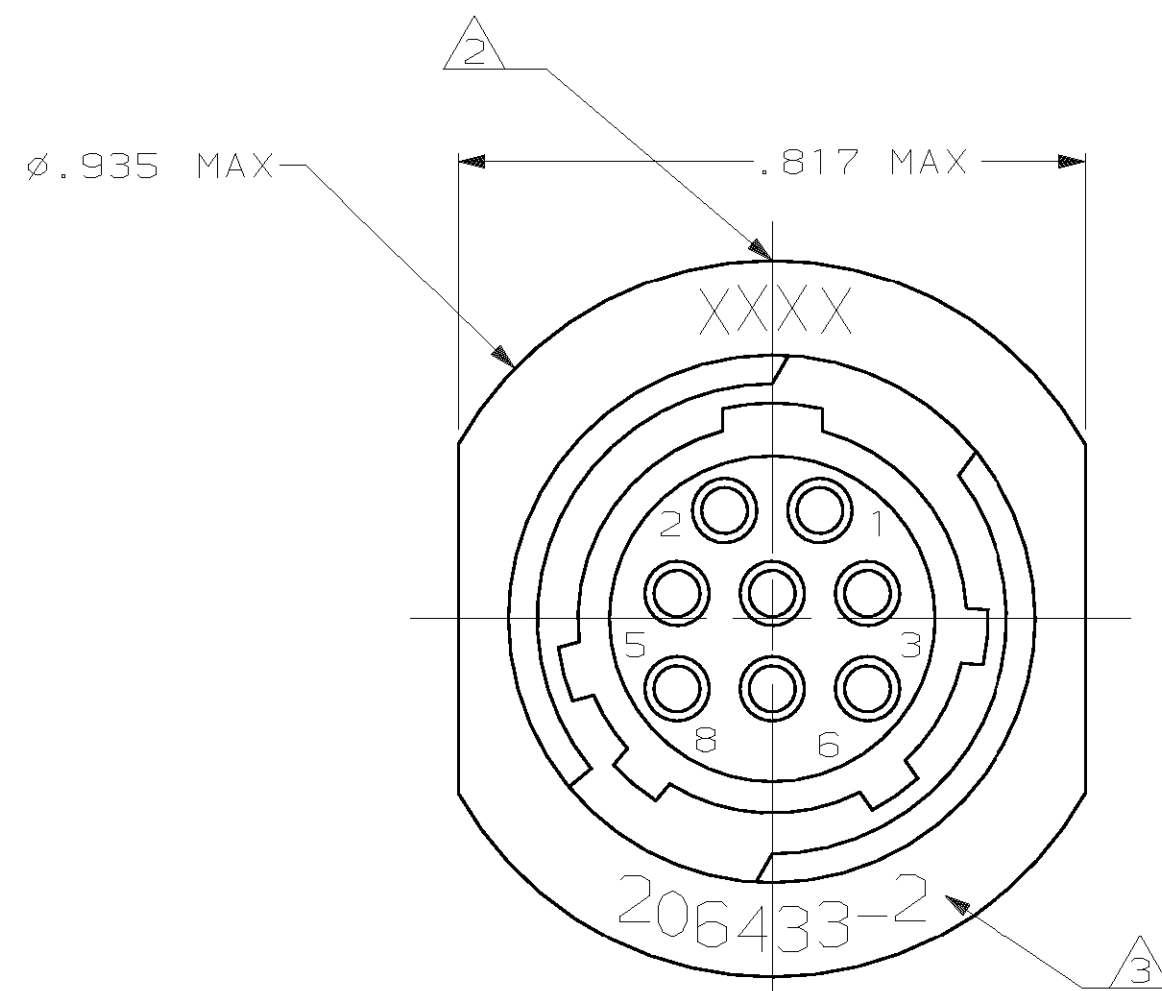

FREE HANGING

1. CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACE.
2. AMP MOLDED ON THIS SURFACE.
3. PART NUMBER AND DATE CODE MARKED ON THIS SURFACE.
4. 206433-4 STRIPPED WIRE LENGTH SHOULD BE .193-.213 WITH .095 MAX INSULATION.
5. OBSOLETE PART NUMBER.
- THIS DRAWING IS A CONTROLLED DOCUMENT FOR

STANDARD	YES	4-40 BRASS THREADED INSERT	20	FLANGED	206433-6
SMALL PACK	NO	.125 DIA	20	FLANGED	206433-5
STANDARD	NO	.125 DIA	20DF WITHOUT INSULATION SUPPORT	FLANGED	 206433-4
STANDARD	NO	4-40 BRASS THREADED INSERT	20	FLANGED	206433-3
STANDARD	NO	-	20	FREE HANGING	206433-2
STANDARD	NO	.125 DIA	20	FLANGED	206433-1
PACKAGING	PERIPHERAL SEAL	A	WILL ACCEPT SOCKET CONTACT SIZE	TYPE	PART NUMBER

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON :
2 PLC DEC $\pm$ -
3 PLC DEC $\pm$.005
ANGLES $\pm$ -

MATERIAL

NYLON, GLASS FILLED,
FLAME RETARDED, BLACK

FINISH

DR	1-25-88
	J. McCLINTON

CHK	1-26-88
	R. STONE

APPD 1-27-88
M. KAPEZYNSKI

APPD	1-27-88
	M. KAPEZYNSKI

PRODUCT SPEC	
--------------	--

	APPLICATION SPEC
--	------------------

WEIGHT

AMP

AMP Incorporated
Harrisburg, PA 17105-3608

	NAME
--	------

RECEPTACLE ASSEMBLY,
ARRANGEMENT 11-8
REVERSE SEX, CPC

	SIZE
--	------

CAGE CODE

00779

DRAWING NO

C-206433

[illegible]

SHEET	1 OF 1
-------	--------