


Type S With Retainer Ring Mounting

Black phenolic quick mounting sockets use no screws or rivets. Retainer ring holds socket securely in place. Sockets are notched around circumference for rotation to convenient wiring position.

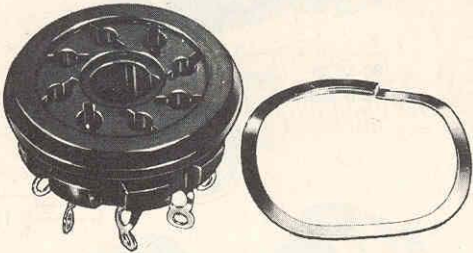

78-S8
socket and retainer ring

TYPE S SOCKETS

Contacts	Contacts	Amphenol Number
4	Brass	78-S4
5	Brass	78-S5
6	Brass	78-S6
8 Octal	Luballoy	78-S8
11	Luballoy	78-S11

DIMENSIONS

Sockets	A	B	C	D	E
78-S4,-S5,-S6	1 1/4	1 5/32	.135	.420	²⁷ / ₃₂ Approx.
78-S8,-S11	1 1/4	1 5/32	.145	.490	⁷ / ₈ Approx.

