

Datasheet

9 female (SP)-25 female (LP) D adaptor


RS Stock 210-0988



Pin – Pin Configurations

| D Sub 9 | | D Sub 25 |
|---------|-------|----------|
| 1 | _____ | 8 |
| 2 | _____ | 3 |
| 3 | _____ | 2 |
| 4 | _____ | 20 |
| 5 | _____ | 7 |
| 6 | _____ | 6 |
| 7 | _____ | 4 |
| 8 | _____ | 5 |
| 9 | _____ | 22 |
| Shell | _____ | Shell |

Specifications

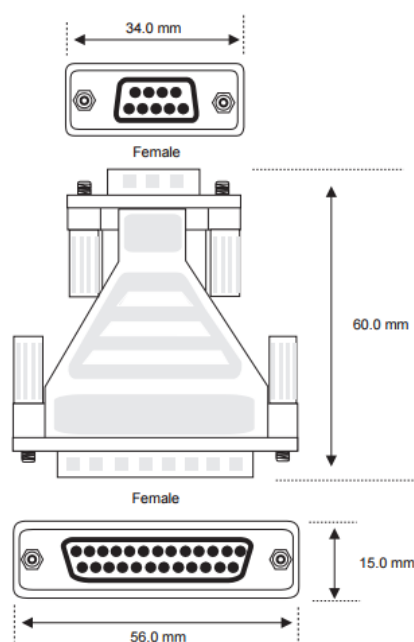

Specification

Current Rating: 5A
 Working Voltage: 300VAC
 Contact Resistance: 5mΩ
 Insulation Rating: 1KΩ
 Mating Cycles: 100
 Temperature Rating: -55°C to + 125°C
 Over-moulding: PVC Black
 Inner Molded: PE
 UL 1007 28AWG
 Thumbscrew Moulded PVC black
 UL94V-O insulation : Black
 DB25F: Contact – Gold
 Flash: Shell : Nickel Plated
 UL94V-O Insulation Black