




## Plugs for pluggable terminal blocks / EC &amp; ESD series



## 2ESDPL

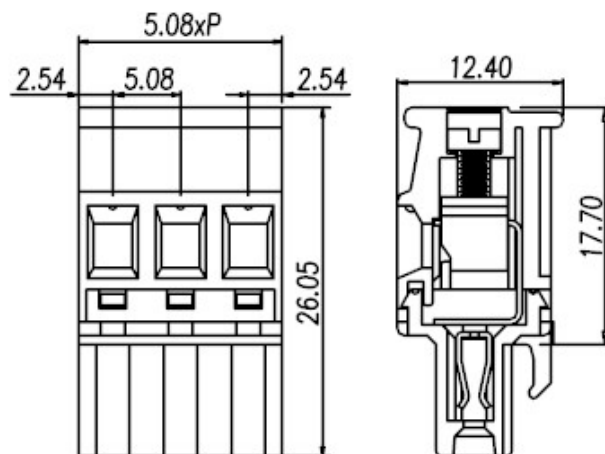

Pitch: 5.08mm

| Approval                             |   |                    |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Technical Data                       | UL                                                                                                                                                                         | IEC                |
| Rated voltage                        | 300V                                                                                                                                                                       | 250V               |
| Rated current                        | 15A                                                                                                                                                                        | 17.5A              |
| Wire range                           |                                                                                                                                                                            | 1.5mm <sup>2</sup> |
| Solid wire (AWG)                     | 28~12                                                                                                                                                                      |                    |
| Stranded wire (AWG/mm <sup>2</sup> ) | 30~12                                                                                                                                                                      |                    |
| Rated surge voltage (UL/IEC/Max.)    | 1.6 / 2 / 3 KV                                                                                                                                                             |                    |
| Torque (Lb-in)                       | 4.5                                                                                                                                                                        |                    |
| Screw                                | M2.5                                                                                                                                                                       |                    |
| Wire strip length                    | 7~8mm                                                                                                                                                                      |                    |
| Pole                                 | Cat. No.                                                                                                                                                                   |                    |
| 02                                   | 2ESDPL-02P                                                                                                                                                                 |                    |
| :                                    | :                                                                                                                                                                          |                    |
| :                                    | :                                                                                                                                                                          |                    |
| 24                                   | 2ESDPL-24P                                                                                                                                                                 |                    |