


Typ ST06..

- 5,08 mm pin spacing
- 2 .. 24-poles single mold
- vertical header
- selective loading possible
- not to be connected or disconnected under electrical load
- closed end

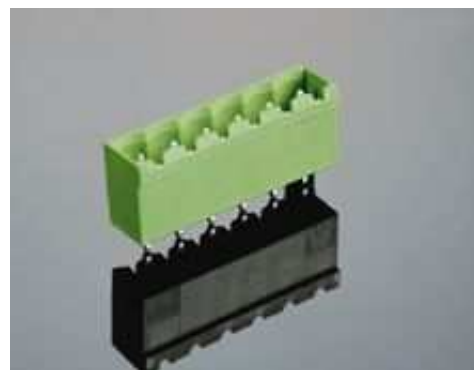

	cULus	VDE
Rated voltage	300 V	250 V
Rated current	15 A	12 A
Rated impulse voltage/Pollution degree		4 kV /3
Dimensions	Spacing PCB hole diameter	5,08 mm 1,4 mm
Materials	Insulating material Flammability class Temperature range Contact pin	PA UL 94 V-0 -30°C/+105°C Cu
Colour	RAL 6018	green

Dimensions

