


Edge Connector Type B

0.2 Connector							
Part Number	Number of Contacts	A	B	C	D	E	F
2202/3088/1	16	3.400	3.580	3.860	0.264	4.160	0.486
2203/3089/1	24	5.000	5.180	5.460	0.264	5.760	0.468
2204/3090/1	32	6.600	6.780	7.060	0.264	7.360	0.468

0.15 Connector							
Part Number	Number of Contacts	A	B	C	D	E	F
2211/3086/1	16	2.550	2.730	3.000	0.369	3.300	0.573
2212/3087/1	24	3.750	3.930	4.200	0.369	4.500	0.573
2213/3088/1	32	4.950	5.130	5.400	0.369	5.700	0.573
2214/3089/1	40	6.150	6.330	6.600	0.369	6.900	0.573

0.156 Connector							
Part Number	Number of Contacts	A	B	C	D	E	F
2241	15	2.504	2.688	2.934	0.300	3.188	0.456
2242	18	2.972	3.156	3.402	0.300	3.656	0.456
2243	22	3.596	3.780	4.026	0.300	4.280	0.456
2245/2/E	22+22	3.596	3.780	4.026	0.300	4.280	0.456

0.1 Connector							
Part Number	Number of Contacts	A	B	C	D	E	F
2232/1	16	1.700	1.840	2.100	0.280	2.400	0.422
2233/1	24	2.500	2.640	2.900	0.280	3.200	0.422
2234/1	32	3.300	3.440	3.700	0.280	4.000	0.422

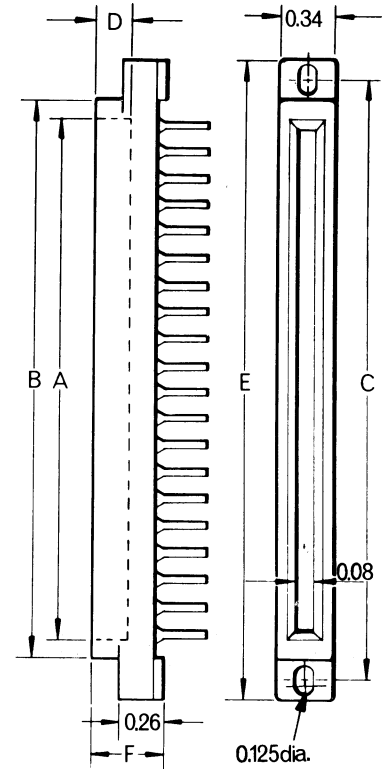

Edge Connector Type C

Specification

Current Rating	5 amps.
Voltage at sea level	2,000v.rms.
Contact Resistance	0.006ohms.
Insulation Resistance	25,000megohms
Insulation Material	Diallyl Phthalate
Contact Material	Phosphor Bronze
Contact Finish	
Nickel Plate	0.0002 in. (0.0051mm)
Gold Flash	
0.0010in (0.0025mm) to 0.00015in. (0.0038mm)	
Temperature	-65° to + 125°C.

Part Number	Number of Contacts	A	B	C
2301/6041	16	3.410	3.680	3.950
2302/6042	24	5.010	5.280	5.550

