




DEF10 Types D, E and F Cable

Multicore cable with all individually screened leads and no collective screen (Corevinsmall type)

DEF10 Types C and R Cable

Multicore cable with inner collective screen only (Metvinsmall type)

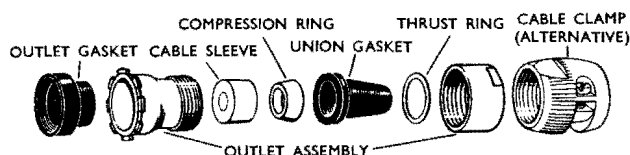

Note: All rubber fittings are solvent resistant.

*Note: suffix digit to be inserted to indicate temperature range required.
Mk. 7 { T4= /2=chloroprene rubber items. T6= /3=Fluorinated silicone rubber items.

Suffix for Mk. 4/203 Aluminium, /205 Brass,

aluminium


Shell Size	Cable O/D		Outlet Accessory Set (Clamp) with:		Outlet Accessory Set (union nut) with:		For outlet dims. see code:
	Min.	Max.	Straight Outlet	Rt. Angle Outlet	Straight Outlet	Rt. Angle Outlet	
1	.230	.350	508/1/13710/*01	508/1/13721/*01	508/1/02776/*01	508/1/02787/*01	a
	.310	.410	508/1/13711/*01	508/1/13722/*01	508/1/02777/*01	508/1/02788/*01	b
	.360 x .220	.410 x .275	508/1/13712/*01	508/1/13723/*01	508/1/02778/*01	508/1/02789/*01	b
2	.230	.350	508/1/13713/*01	508/1/13724/*01	508/1/02779/*01	508/1/02790/*01	c
	.310	.440	508/1/13714/*01	508/1/13725/*01	508/1/02780/*01	508/1/02791/*01	d
	.345	.480	508/1/13715/*01	508/1/13726/*01	508/1/02781/*01	508/1/02792/*01	e
	.470	.530	508/1/13716/*01	508/1/13727/*01	508/1/02782/*01	508/1/02793/*01	f
	.525	.575	508/1/13717/*01	508/1/13728/*01	508/1/02783/*01	508/1/02794/*01	f
3	.470	.530	508/1/13718/*01	508/1/13729/*01	508/1/02784/*01	508/1/02795/*01	g
	.525	.575	508/1/13719/*01	508/1/13730/*01	508/1/02785/*01	508/1/02796/*01	g
	.690	.745	508/1/13720/*01	508/1/13731/*01	508/1/02786/*01	508/1/02797/*01	h

brass

1	.230	.350	508/1/13732/*01	508/1/13744/*01	508/1/02948/*01	508/1/02960/*01	a
	.310	.410	508/1/13733/*01	508/1/13745/*01	508/1/02949/*01	508/1/02961/*01	b
	.360 x .220	.410 x .275	508/1/13734/*01	508/1/13746/*01	508/1/02950/*01	508/1/02962/*01	b
2	.230	.350	508/1/13735/*01	508/1/13747/*01	508/1/02951/*01	508/1/02963/*01	c
	.310	.440	508/1/13736/*01	508/1/13748/*01	508/1/02952/*01	508/1/02964/*01	d
	.345	.480	508/1/13737/*01	508/1/13749/*01	508/1/02953/*01	508/1/02965/*01	e
	.470	.530	508/1/13738/*01	508/1/13750/*01	508/1/02954/*01	508/1/02966/*01	f
	.525	.575	508/1/13739/*01	508/1/13751/*01	508/1/02955/*01	508/1/02967/*01	f
3	.470	.530	508/1/13740/*01	508/1/13752/*01	508/1/02956/*01	508/1/02968/*01	g
	.525	.575	508/1/13741/*01	508/1/13753/*01	508/1/02957/*01	508/1/02969/*01	g
	.690	.745	508/1/13742/*01	508/1/13754/*01	508/1/02958/*01	508/1/02970/*01	h
	.690	.745	508/1/13743/*01	508/1/13755/*01	508/1/02959/*01	508/1/02971/*01	i

DEF10 Type J Cable

Multicore cable with inner collective screen and individually screened H.T. leads (Coremetvinsmall type)



Note: All rubber fittings are solvent resistant.

*Note: suffix digit to be inserted to indicate temperature range required.
Mk. 7 { T4= /2=chloroprene rubber items. T6= /3=Fluorinated silicone rubber items.

Suffix for Mk. 4/203 Aluminium, /205 Brass,

aluminium

2	.470	.530	508/1/02806/*01	508/1/02809/*01	f
	.525	.575	508/1/02807/*01	508/1/02810/*01	f
3	.690	.760	508/1/02808/*01	508/1/02811/*01	h

brass

2	.470	.530	508/1/02980/*01	508/1/02983/*01	f
	.525	.575	508/1/02981/*01	508/1/02984/*01	f
3	.690	.760	508/1/02982/*01	508/1/02985/*01	h