



26 series rack and panel connectors

Barrier polarization


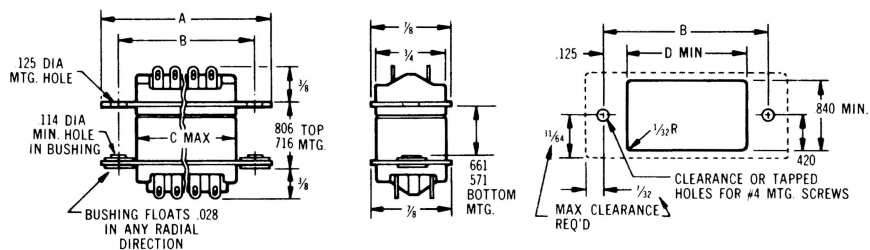


Dimensions (inches)


Dimensions (mm/inch)	A	B	C Max.	D Min.
26-4100-8P mated with 26-4200-8S	1.721	1.375	1.042	1.120
26-4100-16P mated with 26-4200-16S	2.470	2.125	1.790	1.868
26-4100-24P mated with 26-4200-24S	3.220	2.875	2.542	2.620
26-4100-32P mated with 26-4200-32S	3.970	3.625	3.292	3.370

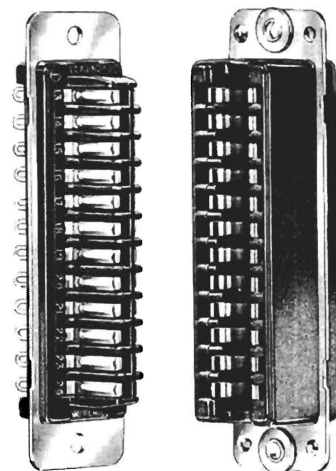

Pin polarization

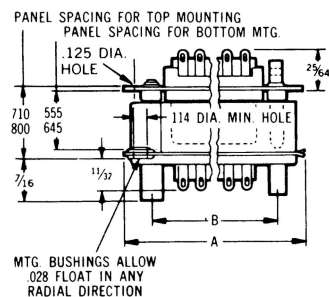


NOTE: CUTOUT SHOWS HOLES AS
VIEWED FROM FRONT OF
RECEPTACLE OR REAR OF PLUG

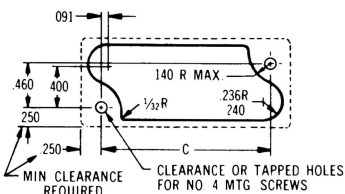

Dimensions (inches)

	A	B	C
26-159-16 mated with 26-190-16	2.442	1.842	2.024
26-159-24 mated with 26-190-24	3.118	2.522	2.704
26-159-32 mated with 26-190-32	3.798	3.202	3.384

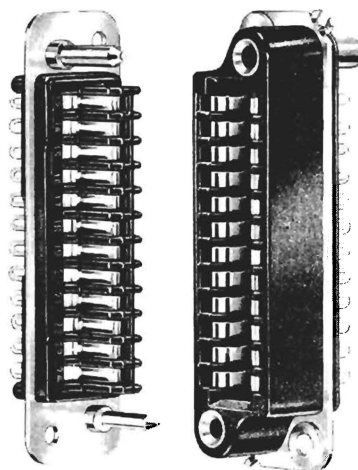

Ordering information

Pin polarization			Barrier polarization		
Number of contacts	Plug	Receptacle	Number of contacts	Plug	Receptacle
16	26-159-16P	26-190-16S	8	26-182	26-183
24	26-159-24P	26-190-24S	8	26-4100-8P	26-4200-8S
32	26-159-32P	26-190-32S	16	26-4100-16P	26-4200-16S
			24	26-4100-24P	26-4200-24S
			32	26-4100-32P	26-4200-32S