
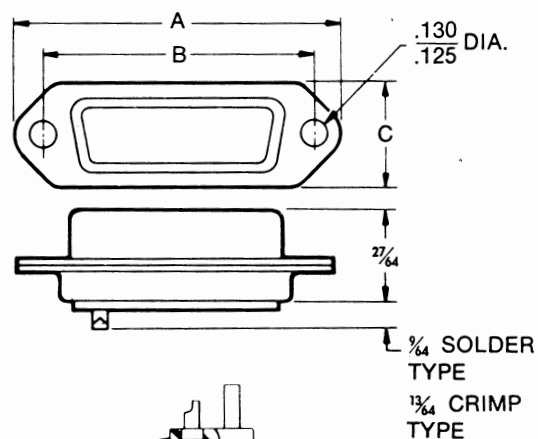
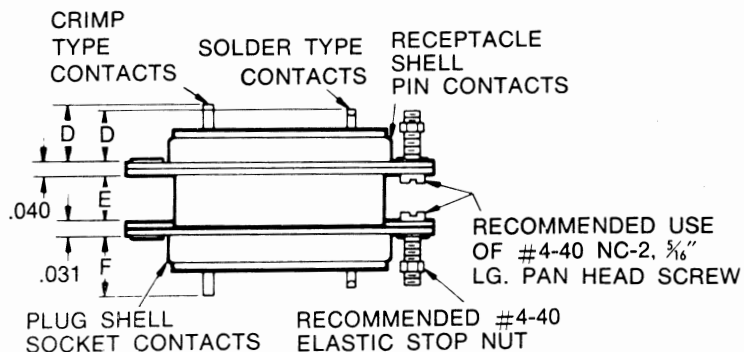


Min-rac 17 series Dimensions

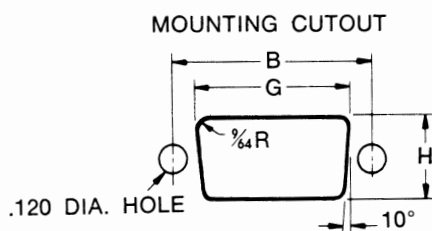


Connector Size	A Max.	B	C Max.	D		E	F		G (Min.)		H (Min.)	
				Crimp	Solder		Crimp	Solder	Back Mtg.	Front Mtg.	Back Mtg.	Front Mtg.
9	1.239	.984	.515	21/64	17/64	15/64	11/32	3/32	.798	.830	.448	.505
15	1.567	1.312	.515	21/64	17/64	15/64	11/32	3/32	1.116	1.161	.448	.505
25	2.114	1.852	.515	21/64	17/64	15/64	11/32	3/32	1.654	1.701	.448	.505
37	2.754	2.500	.515	21/64	17/64	15/64	11/32	3/32	2.304	2.348	.448	.505
50	2.661	2.406	.626	21/64	17/64	15/64	11/32	3/32	2.210	2.285	.559	.645

Ordering information


Number of Contacts	Standard Crimp Contacts		Solder Type Contacts	
	Receptacle Socket Contacts	Plug Pin Contacts	Receptacle Socket Contacts	Plug Pin Contacts
9	17-10090-1	17-20090-1	17-10090	17-20090
15	17-10150-1	17-20150-1	17-10150	17-20150
25	17-10250-1	17-20250-1	17-10250	17-20250
37	17-10370-1	17-20370-1	17-10370	17-20370
50	17-10500-1	17-20500-1	17-10500	17-20500

Contacts available


Standard crimp type contacts




Standard solder type contacts



Optional contacts




Pintail contacts for P.C. mounting—.023 dia. of pintail.

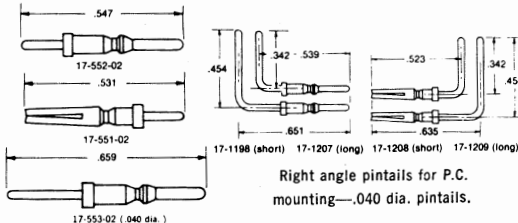


26 series rack and panel connectors

Barrier polarization

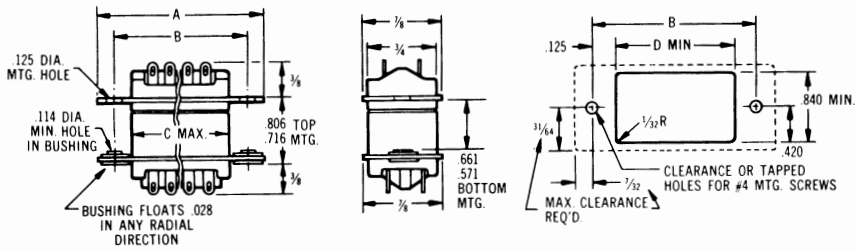


Dimensions (inches)

	A	B	C Max.	D Min.
26-4100-8P mated with 26-4200-8S	1.721	1.375	1.042	1.120
26-4100-16P mated with 26-4200-16S	2.470	2.125	1.790	1.868
26-4100-24P mated with 26-4200-24S	3.220	2.875	2.542	2.620
26-4100-32P mated with 26-4200-32S	3.970	3.625	3.292	3.370

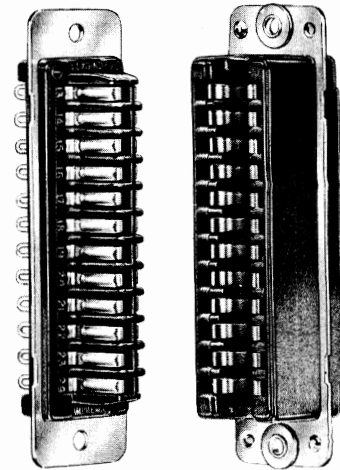


Pin polarization

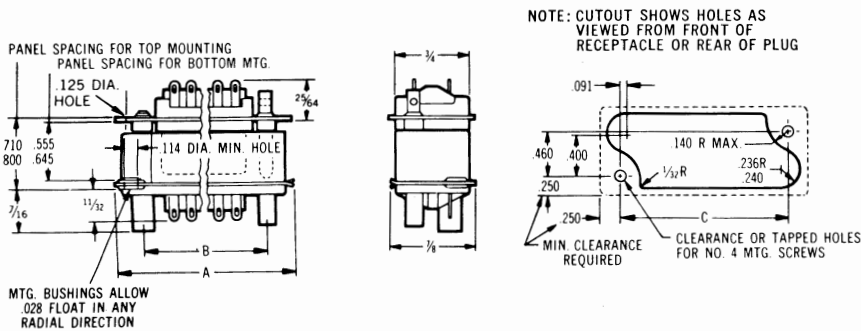

Dimensions (inches)

	A	B	C
26-159-16 mated with 26-190-16	2.442	1.842	2.024
26-159-24 mated with 26-190-24	3.118	2.522	2.704
26-159-32 mated with 26-190-32	3.798	3.202	3.384

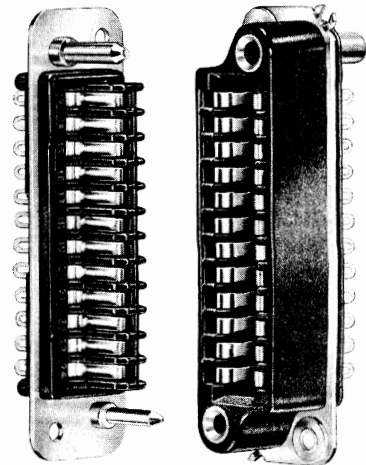


Ordering information

Pin polarization			Barrier polarization		
Number of contacts	Plug	Receptacle	Number of contacts	Plug	Receptacle
16	26-159-16P	26-190-16S	8	26-182	26-183
24	26-159-24P	26-190-24S	8	26-4100-8P	26-4200-8S
32	26-159-32P	26-190-32S	16	26-4100-16P	26-4200-16S
			24	26-4100-24P	26-4200-24S
			32	26-4100-32P	26-4200-32S

26 series barrier polarization with keyed shells





Similar to barrier type with addition of aluminum shell on both plug and receptacle. Shell is keyed to prevent accidental mis-mating of several connectors mounted on the same panel. 26-41XX connectors have plug (male) insert in receptacle shell. 26-42XX connectors have receptacle (female) inserts in plug shell.

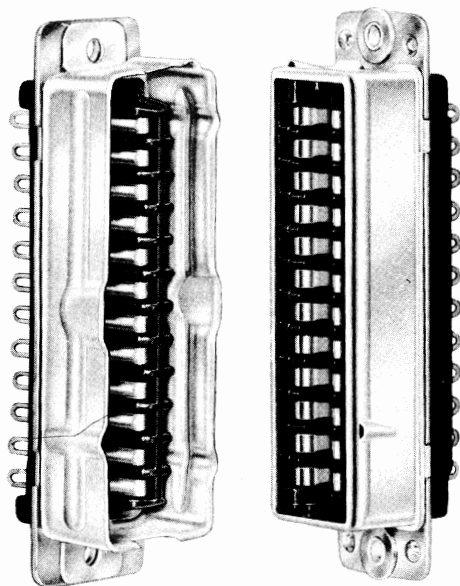**Dimensions (inches)**

	A	B	C Max.	D Min.
8 contact plug and receptacle mated	1.721	1.375	1.042	1.120
16 contact plug and receptacle mated	2.470	2.125	1.790	1.868
24 contact plug and receptacle mated	3.220	2.875	2.542	2.620
32 contact plug and receptacle mated	3.970	3.625	3.292	3.370


Ordering information

Plugs	Contacts	Shell keys		Mating Receptacles
		Letters	Numbers	
26-4101-8P	8	A	1	26-4201-8S
26-4102-8P	8	A	2	26-4202-8S
26-4103-8P	8	B	1	26-4203-8S
26-4104-8P	8	B	2	26-4204-8S
26-4101-16P	16	A-C	3-6	26-4201-16S
26-4102-16P	16	A-D	2-5	26-4202-16S
26-4103-16P	16	A-E	5-6	26-4203-16S
26-4104-16P	16	A-F	4-5	26-4204-16S
26-4105-16P	16	B-C	1-6	26-4205-16S
26-4106-16P	16	B-D	1-2	26-4206-16S
26-4107-16P	16	B-E	1-4	26-4207-16S
26-4108-16P	16	B-F	2-3	26-4208-16S
26-4101-24P	24	A-C	3-6	26-4201-24S
26-4102-24P	24	A-D	4-7	26-4202-24S
26-4103-24P	24	A-E	5-6	26-4203-24S
26-4104-24P	24	A-F	4-5	26-4204-24S
26-4105-24P	24	A-G	6-7	26-4205-24S
26-4106-24P	24	A-H	1-6	26-4206-24S
26-4107-24P	24	B-C	2-7	26-4207-24S
26-4108-24P	24	B-D	1-2	26-4208-24S
26-4109-24P	24	B-E	1-4	26-4209-24S
26-4110-24P	24	B-F	2-3	26-4210-24S
26-4111-24P	24	B-G	3-4	26-4211-24S
26-4112-24P	24	B-H	2-5	26-4212-24S
26-4101-32P	32	A-C	3-6	26-4201-32S
26-4102-32P	32	A-D	4-7	26-4202-32S
26-4103-32P	32	A-E	5-6	26-4203-32S
26-4104-32P	32	A-F	4-5	26-4204-32S
26-4105-32P	32	A-G	6-7	26-4205-32S
26-4106-32P	32	A-H	1-6	26-4206-32S
26-4107-32P	32	B-C	2-7	26-4207-32S
26-4108-32P	32	B-D	1-2	26-4208-32S
26-4109-32P	32	B-E	1-4	26-4209-32S
26-4110-32P	32	B-F	2-3	26-4210-32S
26-4111-32P	32	B-G	3-4	26-4211-32S
26-4112-32P	32	B-H	2-5	26-4212-32S

**SHELL KEY****PLUG FRONT SHELL****RECEPTACLE FRONT SHELL**


26 series rack and panel connectors

Barrier polarization

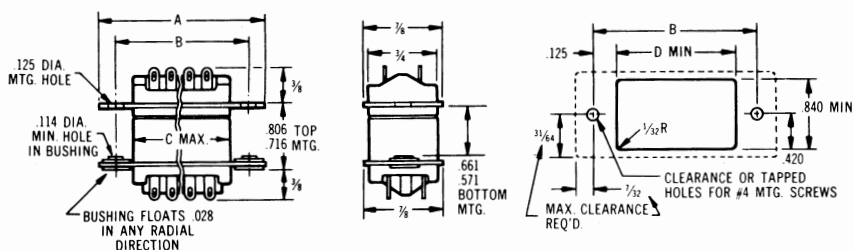


Dimensions (inches)

	A	B	C Max.	D Min.
26-4100-8P mated with 26-4200-8S	1.721	1.375	1.042	1.120
26-4100-16P mated with 26-4200-16S	2.470	2.125	1.790	1.868
26-4100-24P mated with 26-4200-24S	3.220	2.875	2.542	2.620
26-4100-32P mated with 26-4200-32S	3.970	3.625	3.292	3.370

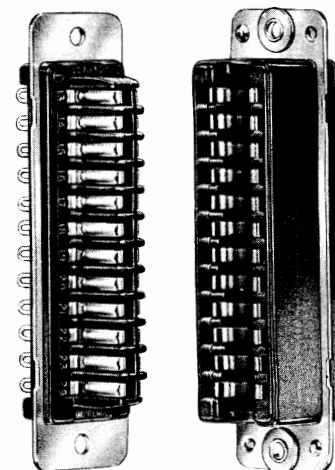


Pin polarization

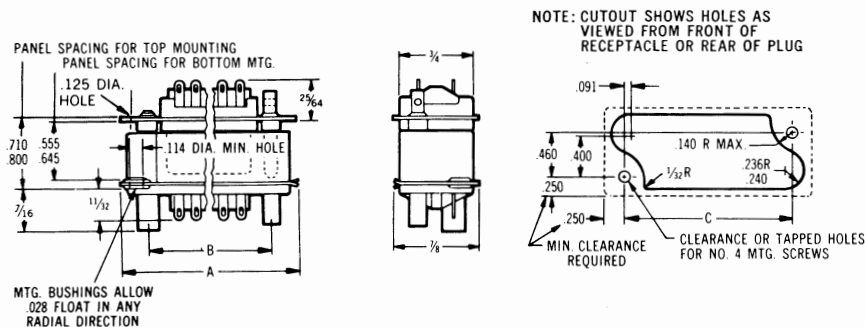

Dimensions (inches)

	A	B	C
26-159-16 mated with 26-190-16	2.442	1.842	2.024
26-159-24 mated with 26-190-24	3.118	2.522	2.704
26-159-32 mated with 26-190-32	3.798	3.202	3.384

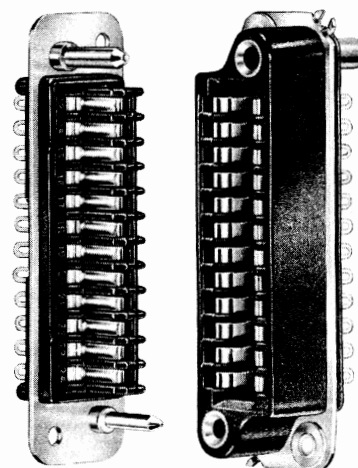

Ordering information


Pin polarization			Barrier polarization		
Number of contacts	Plug	Receptacle	Number of contacts	Plug	Receptacle
16	26-159-16P	26-190-16S	8	26-182	26-183
24	26-159-24P	26-190-24S	8	26-4100-8P	26-4200-8S
32	26-159-32P	26-190-32S	16	26-4100-16P	26-4200-16S
			24	26-4100-24P	26-4200-24S
			32	26-4100-32P	26-4200-32S

Ordering information 26 series cable-to-panel and cable-to-cable types

Contacts	Shell Keys Letters	Numbers	Plugs for Both Cable-to-Panel and Cable-to-Cable Use		Mating Receptacles With Backshell for Cable-to-Cable Only		
			Top Cable Entry	Side Cable Entry	For Panel Use Only	Top Cable Entry	Side Cable Entry
8	A	1	26-4301-8	26-4501-8	26-4401-8	26-4601-8	26-4701-8
8	A	2	26-4302-8	26-4502-8	26-4402-8	26-4602-8	26-4702-8
8	B	1	26-4303-8	26-4503-8	26-4403-8	26-4603-8	26-4703-8
8	B	2	26-4304-8	26-4504-8	26-4404-8	26-4604-8	26-4704-8
16	A-C	3-6	26-4301-16	26-4501-16	26-4401-16	26-4601-16	26-4701-16
16	A-D	2-5	26-4302-16	26-4502-16	26-4402-16	26-4602-16	26-4702-16
16	A-E	5-6	26-4303-16	26-4503-16	26-4403-16	26-4603-16	26-4703-16
16	A-F	4-5	26-4304-16	26-4504-16	26-4404-16	26-4604-16	26-4704-16
16	B-C	1-6	26-4305-16	26-4505-16	26-4405-16	26-4605-16	26-4705-16
16	B-D	1-2	26-4306-16	26-4506-16	26-4406-16	26-4606-16	26-4706-16
16	B-E	1-4	26-4307-16	26-4507-16	26-4407-16	26-4607-16	26-4707-16
16	B-F	2-3	26-4308-16	26-4508-16	26-4408-16	26-4608-16	26-4708-16
24	A-C	3-6	26-4301-24	26-4501-14	26-4401-24	26-4601-24	26-4701-24
24	A-D	4-7	26-4302-24	26-4502-24	26-4402-24	26-4602-24	26-4702-24
24	A-E	5-6	26-4303-24	26-4503-24	26-4403-24	26-4603-24	26-4703-24
24	A-F	4-5	26-4304-24	26-4504-24	26-4404-24	26-4604-24	26-4704-24
24	A-G	6-7	26-4305-24	26-4505-24	26-4405-24	26-4605-24	26-4705-24
24	A-H	1-6	26-4306-24	26-4506-24	26-4406-24	26-4606-24	26-4706-24
24	B-C	2-7	26-4307-24	26-4507-24	26-4407-24	26-4607-24	26-4707-24
24	B-D	1-2	26-4308-24	26-4508-24	26-4408-24	26-4608-24	26-4708-24
24	B-E	1-4	26-4309-24	26-4509-24	26-4409-24	26-4609-24	26-4709-24
24	B-F	2-3	26-4310-24	26-4510-24	26-4410-24	26-4610-24	26-4710-24
24	B-G	3-4	26-4311-24	26-4511-24	26-4411-24	26-4611-24	26-4711-24
24	B-H	2-5	26-4312-24	26-4512-24	26-4412-24	26-4612-24	26-4712-24
32	A-C	3-6	26-4301-32	26-4501-32	26-4401-32	26-4601-32	26-4701-32
32	A-D	4-7	26-4302-32	26-4502-32	26-4402-32	26-4602-32	26-4702-32
32	A-E	5-6	26-4303-32	26-4503-32	26-4403-32	26-4603-32	26-4703-32
32	A-F	4-5	26-4304-32	26-4504-32	26-4404-32	26-4604-32	26-4704-32
32	A-G	6-7	26-4305-32	26-4505-32	26-4405-32	26-4605-32	26-4705-32
32	A-H	1-6	26-4306-32	26-4506-32	26-4406-32	26-4606-32	26-4706-32
32	B-C	2-7	26-4307-32	26-4507-32	26-4407-32	26-4607-32	26-4707-32
32	B-D	1-2	26-4308-32	26-4508-32	26-4408-32	26-4608-32	26-4708-32
32	B-E	1-4	26-4309-32	26-4509-32	26-4409-32	26-4609-32	26-4709-32
32	B-F	2-3	26-4310-32	26-4510-32	26-4410-32	26-4610-32	26-4710-32
32	B-G	3-4	26-4311-32	26-4511-32	26-4411-32	26-4611-32	26-4711-32
32	B-H	2-5	26-4312-32	26-4512-32	26-4412-32	26-4612-32	26-4712-32


26 series cable-to-panel and cable-to-cable styles

Cable-to-panel type

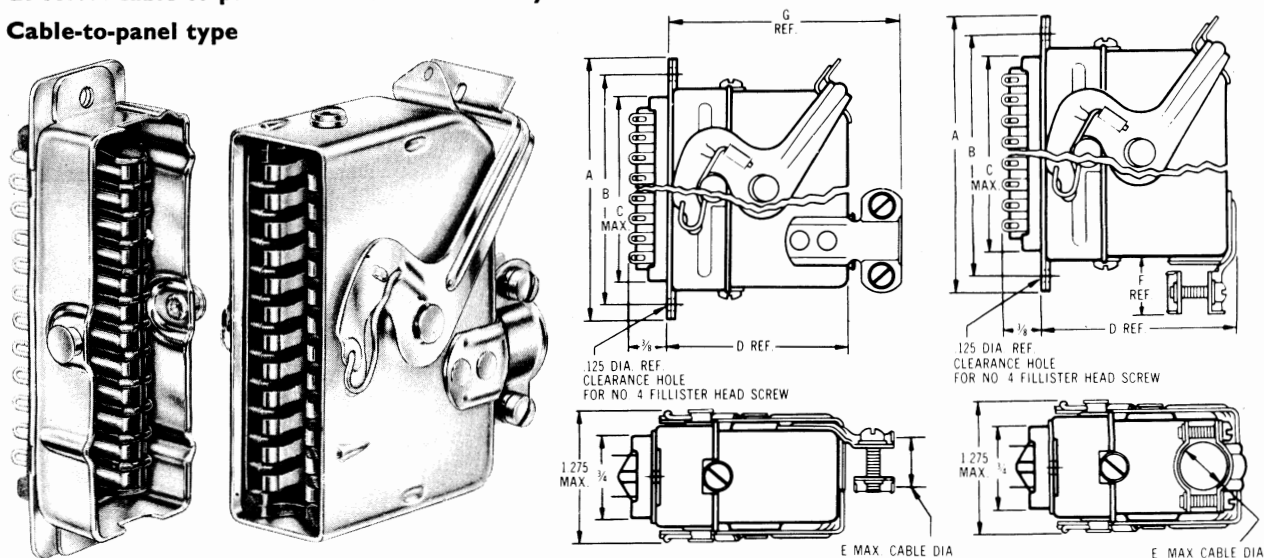

	A	B	C	D-Ref.		E	F	G
			Max.	4300	4500	Max.	REF.	REF.
8 contact plug & receptacle mated	1-721	1-375	1-042	1-598	1-697	0-312	0-438	2-059
16 contact plug & receptacle mated	2-470	2-125	1-790	1-723	1-822	0-625	0-500	2-246
24 contact plug & receptacle mated	3-220	2-875	2-542	1-848	1-947	0-625	0-500	2-371
32 contact plug & receptacle mated	3-970	3-625	3-292	1-911	2-025	0-625	0-500	2-434

Cable-to-cable type

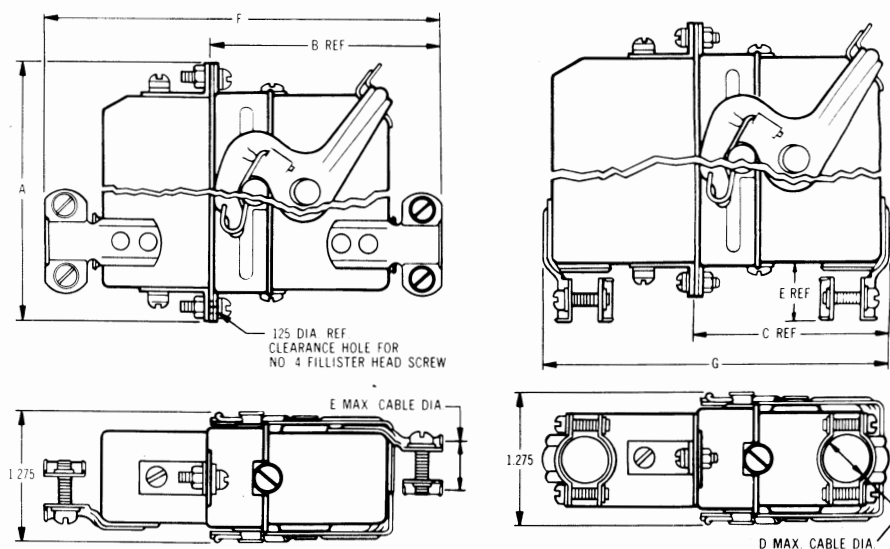

No. of Contacts	A Top Entry	B Top Entry	C Side Entry	D	E Side Entry	F Top Entry	G Side Entry
8	1-721	2-059	1-697	0-312	0-448	4-046	3-322
16	2-470	2-246	1-822	0-625	0-500	4-420	3-572
24	3-220	2-371	1-947	0-625	0-500	4-670	3-822
32	3-970	2-434	2-025	0-625	0-500	4-796	3-978