


Amphenol

26-Series Connectors

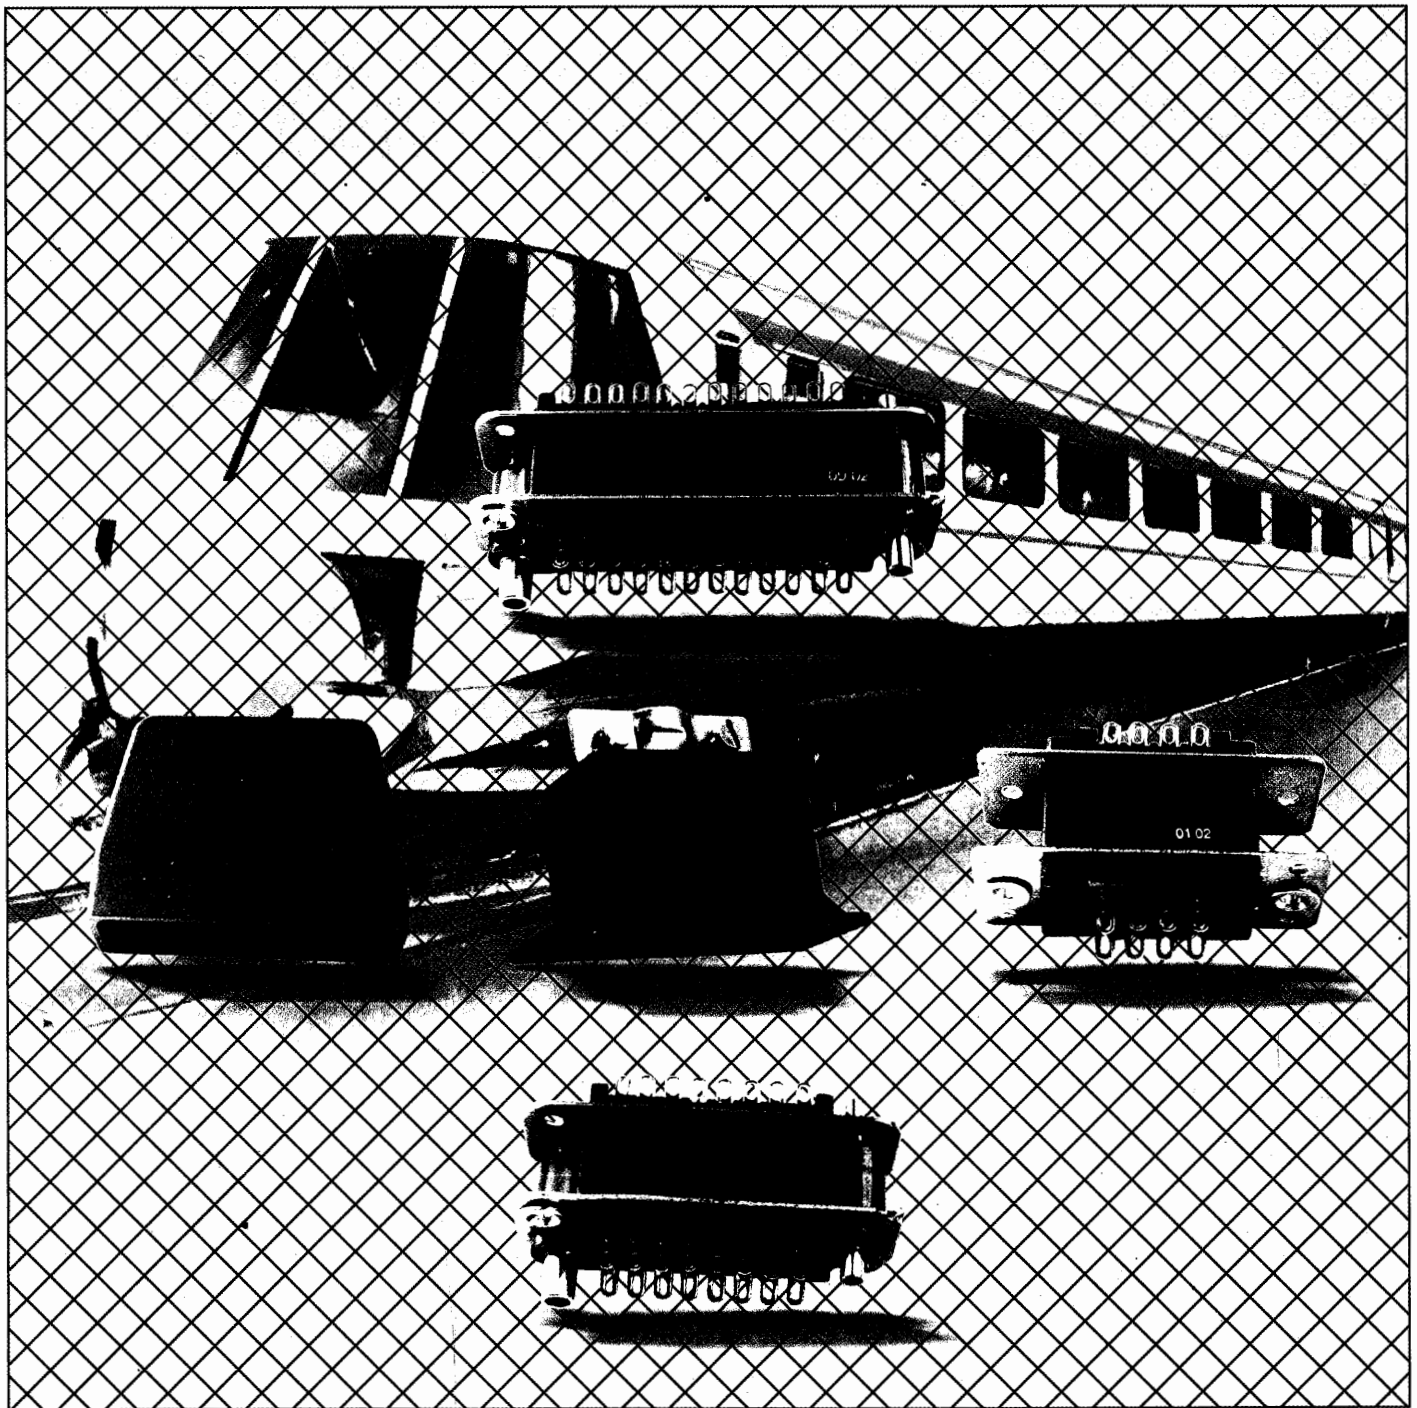

Amphenol

26 SERIES RACK & PANEL CONNECTORS**R & P - 1**

These connectors have been developed to provide a rugged heavy duty interconnection, where size is not a limited factor and large gauge wires can be used because of ribbon contact principle. These connectors have excellent performance features like easy mating, positive contact pressure and self cleaning action. These connectors are polarised. 26 Series Rack and Panel Connectors are also qualified to meet the operating requirements of Defence Standard Joint Services Specification **JSS50812**, issued by the Electronics Components Standardization Organisation (LCSO).

APPLICATIONS :

These are mainly used in industrial control instruments, test equipments and transportation.


Contents	Page No.
Introduction	1
Technical Data	2
8 Pin Plug	3
8 Pin Receptacle	4
16 Pin Plug	5
16 Pin Receptacle	6
24 Pin Plug	7
24 Pin Receptacle	8

TECHNICAL DATA

- | | | |
|-----|-------------------------------|--|
| 1) | Operating Voltage | : 750v rms |
| 2) | Operating Current | : 5 Amps |
| 3) | Operating Temperature | : -55°C + 125°C |
| 4) | Materials | |
| | a) Insulator | : Glass filled
Diallylphthalate (DAP) |
| | b) Contact | |
| | i) Socket | : Phosphor Bronze |
| | ii) Plug | : Brass |
| | c) Other metal parts | |
| | i) Mounting Plate | : Stainless Steel passivated |
| | ii) Guide pin | : Aluminium (Ni plated) |
| | iii) Guide bush | : Brass (Ni plated) |
| | iv) Washer | : Brass (Ni plated) |
| 5) | Contact Resistance | : 11 millionhms max. |
| 6) | Insulation Resistance | : 5000 Megohms min. |
| 7) | Voltage Proof | : 1200v rms |
| 8) | Connector engagement force | |
| | i) 8 Pin | : 3.7 kgs. max. |
| | ii) 16 Pin | : 7.0 kgs. max. |
| | iii) 24 Pin | : 11.0 kgs. max. |
| 9) | Connector disengagement force | |
| | i) 8 Pin | : 150 gms. min. |
| | ii) 16 Pin | : 300 gms. min. |
| | iii) 24 Pin | : 450 gms. min. |
| 10) | Colour | : Blue |

Ref : Standard / Specification : Meets requirements of
JSS50821

8 PIN PLUG


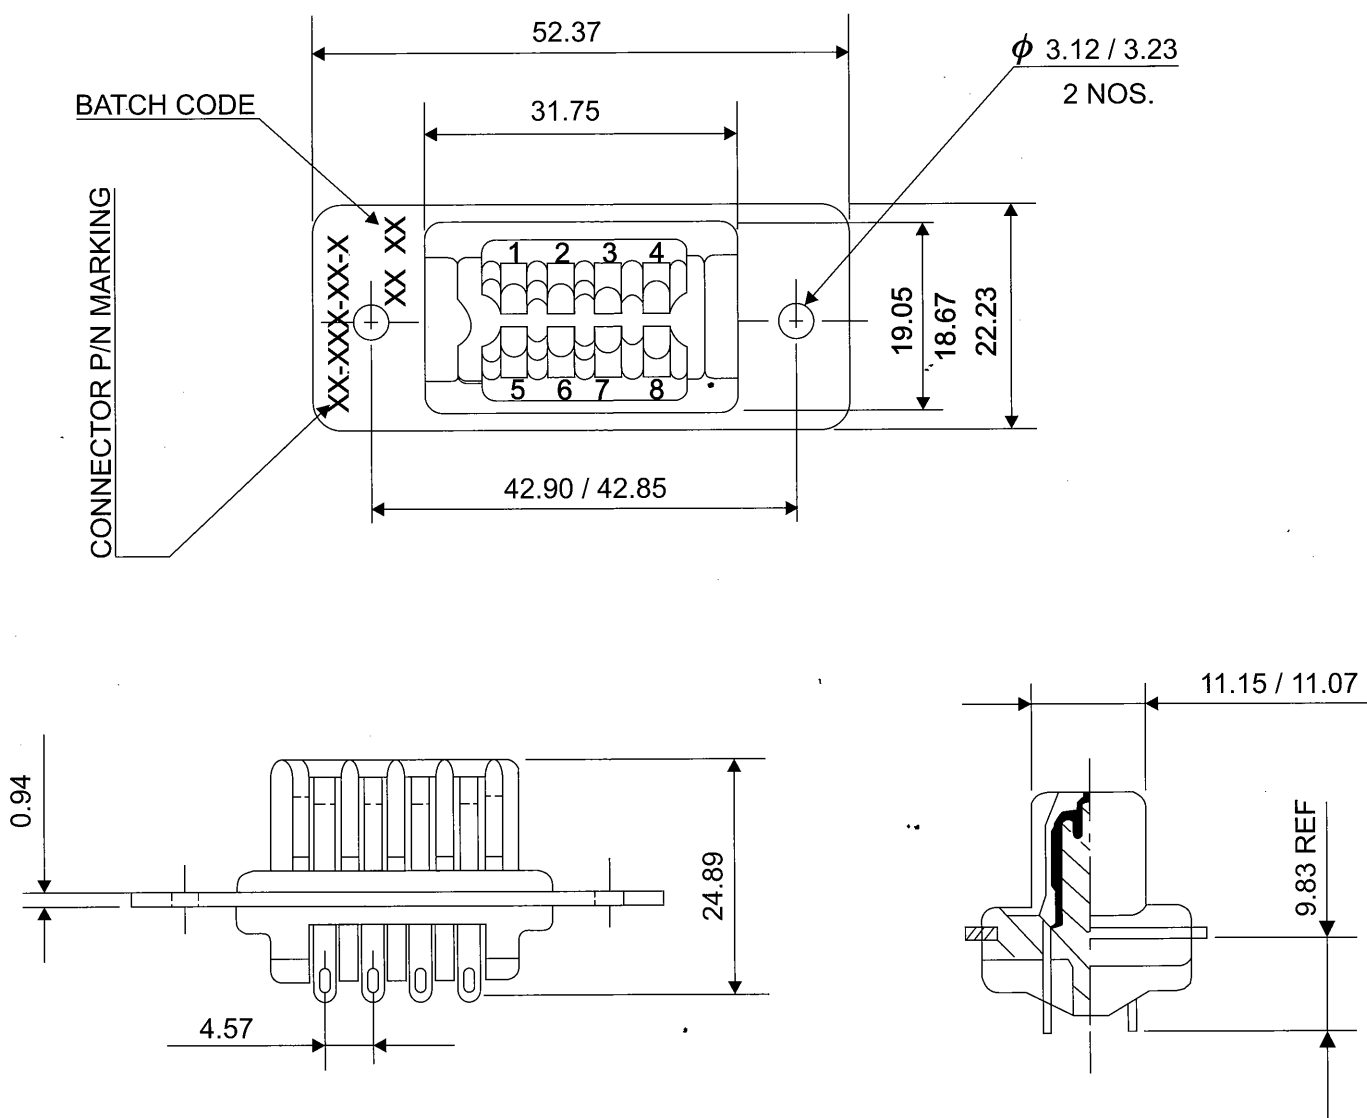


PART NO. DETAILS

SL. NO.	CONNECTOR P/N	NO. OF CONT.	TERMINATION TYPE	CONTACT FINISH	LEVEL
1	26-182	8	SOLDER	GOLD PLATE OVER NICKEL	1
2	26-08P-004	8	SOLDER	GOLD PLATE OVER NICKEL	3
3	26-08P-99	8	SOLDER	SILVER PL. & TIN LEAD SOLDER DIP ON TERMINATION	-

All dimensions are in mm

8 PIN RECEPTACLE

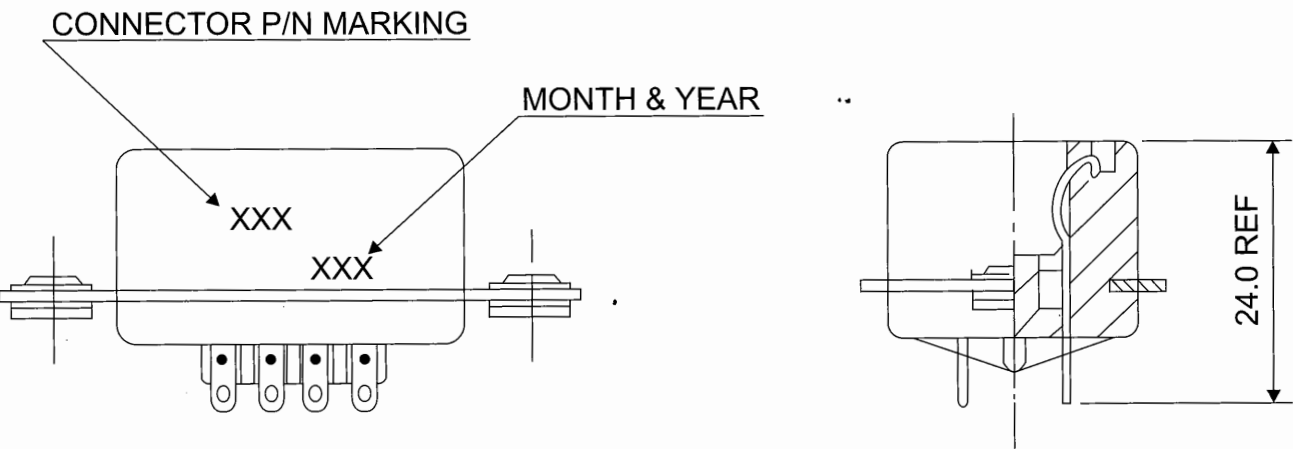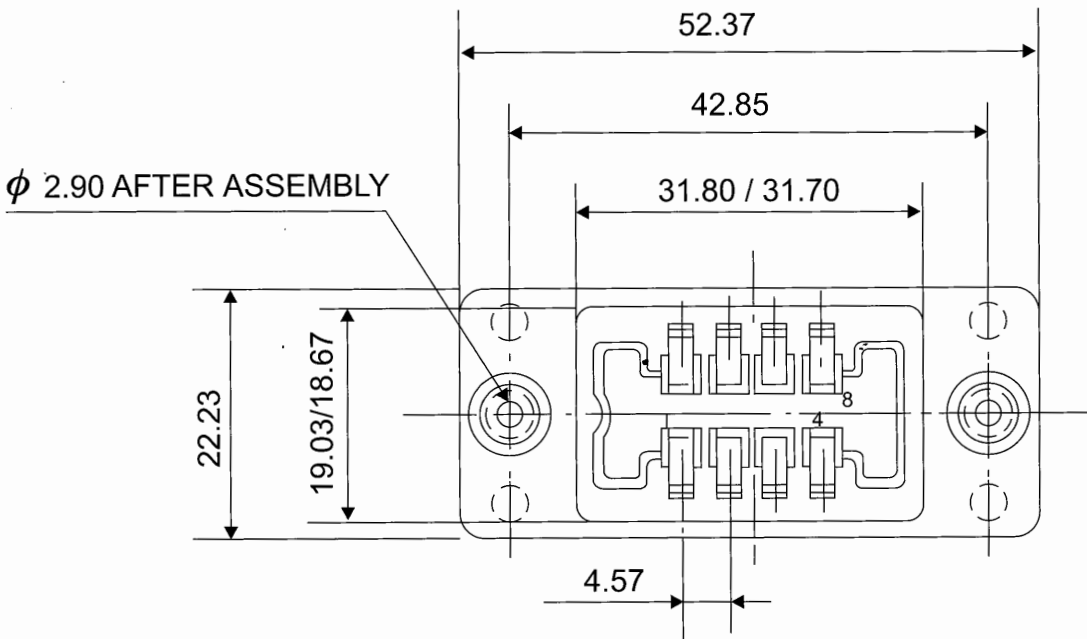


PART NO. DETAILS

SL. NO.	CONNECTOR P/N	NO. OF CONT.	TERMINATION TYPE	CONTACT FINISH	LEVEL
1	26-183	8	SOLDER	GOLD PLATE OVER NICKEL	1
2	26-08S-004	8	SOLDER	GOLD PLATE OVER NICKEL	3
3	26-08S-99	8	SOLDER	SILVER PL. & TIN LEAD SOLDER DIP ON TERMINATION	-

All dimensions are in mm

16 PIN PLUG

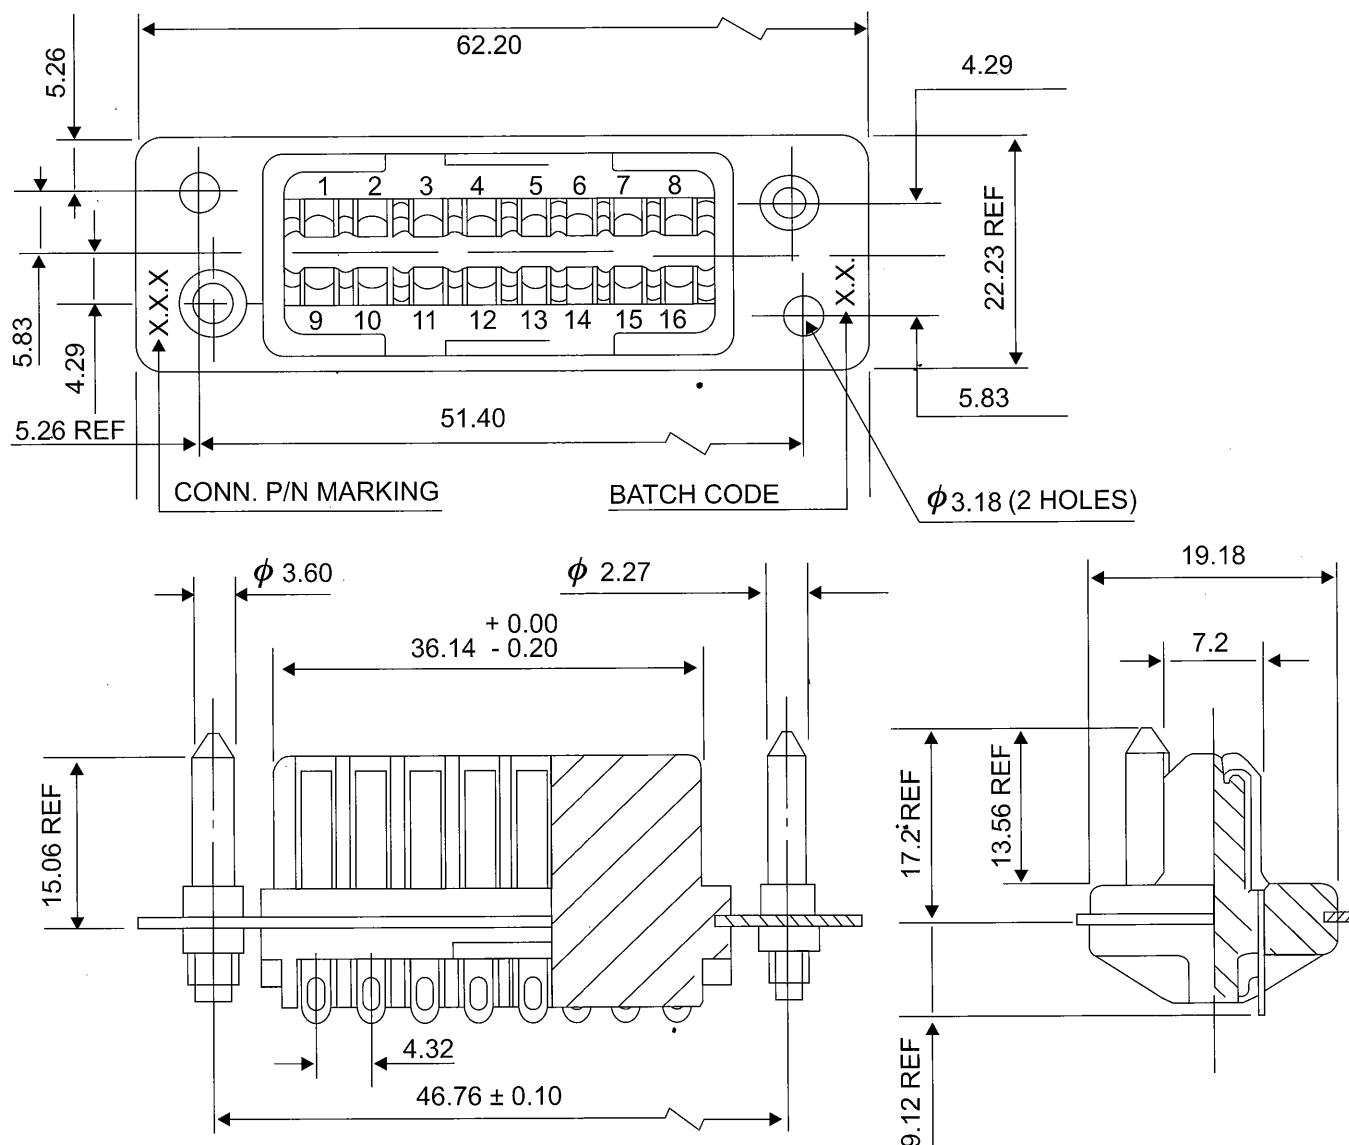


PART NO. DETAILS

SL. NO.	CONNECTOR P/N	NO. OF CONT.	TERMINATION TYPE	CONTACT FINISH	LEVEL
1	26-159-16	16	SOLDER	GOLD PLATE OVER NICKEL	1
2	26-16P-004	16	SOLDER	--- DO ---	3
3	26-16P-99	16	SOLDER	MATING : SILVER TERMINATION : TIN LEAD SOLDER DIPOVER SILVER	-

All dimensions are in mm

16 PIN RECEPTACLE

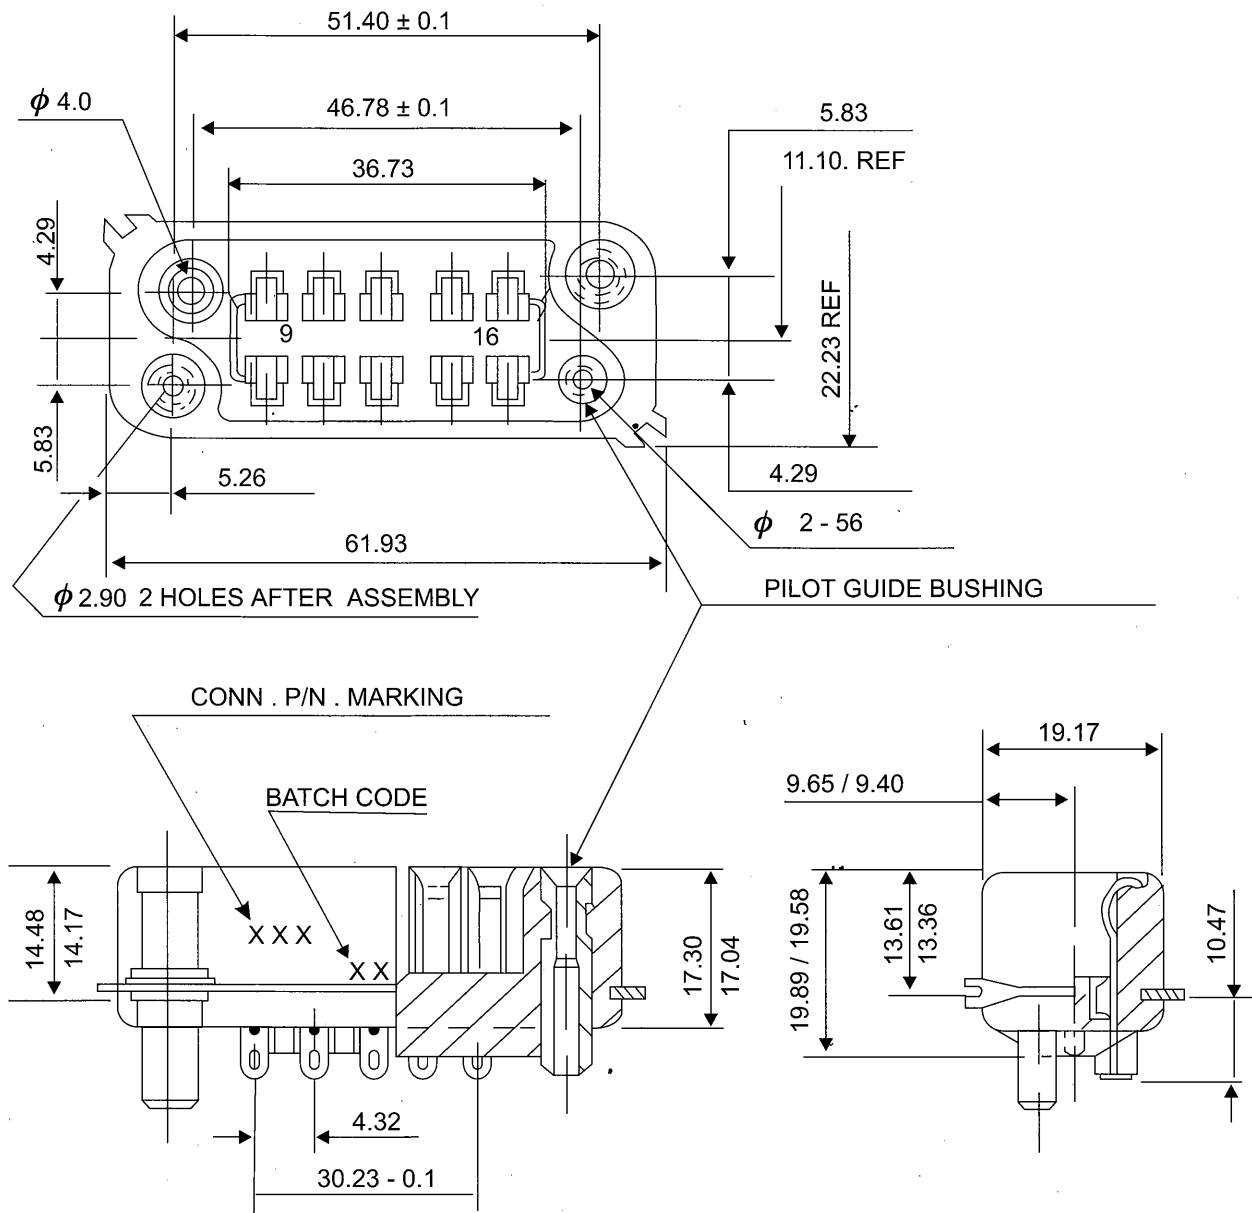


PART NO. DETAILS

SL. NO.	CONNECTOR P/N	NO. OF CONT.	TERMINATION TYPE	CONTACT FINISH	LEVEL
1	26 - 190 - 16	16	SOLDER	GOLD PLATE OVER NICKEL	1
2	26 - 16S - 004	16	SOLDER	--- DO ---	3
3	26 - 16S - 99	16	SOLDER	MATING : SILVER TERMINATION : TIN LEAD SOLDER DIPOVER SILVER	-

All dimensions are in mm

24 PIN PLUG

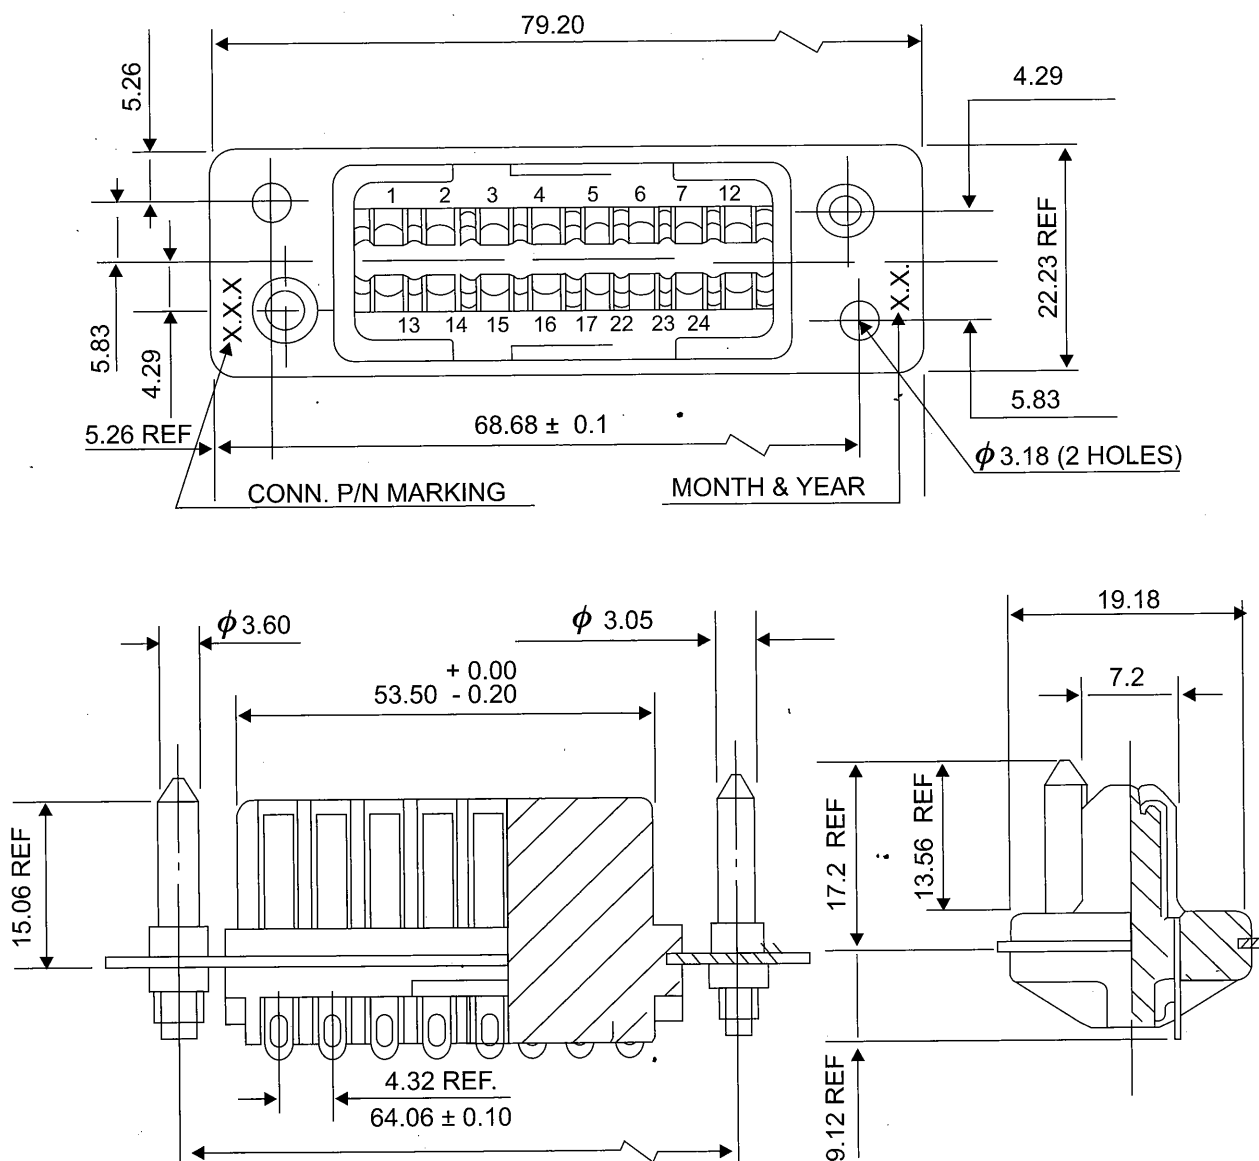


PART NO. DETAILS

SL. NO.	CONNECTOR P/N	NO. OF CONT.	TERMINATION TYPE	CONTACT FINISH	LEVEL
1	26-159-24P	24	SOLDER	GOLD PLATE OVER NICKEL	1
2	26-24P-004	24	SOLDER	GOLD PLATE OVER NICKEL	3
3	26-24P-99	24	SOLDER	SILVER PL. & TIN LEAD SOLDER DIP ON TERMINATION	-

All dimensions are in mm

24 PIN RECEPTACLE

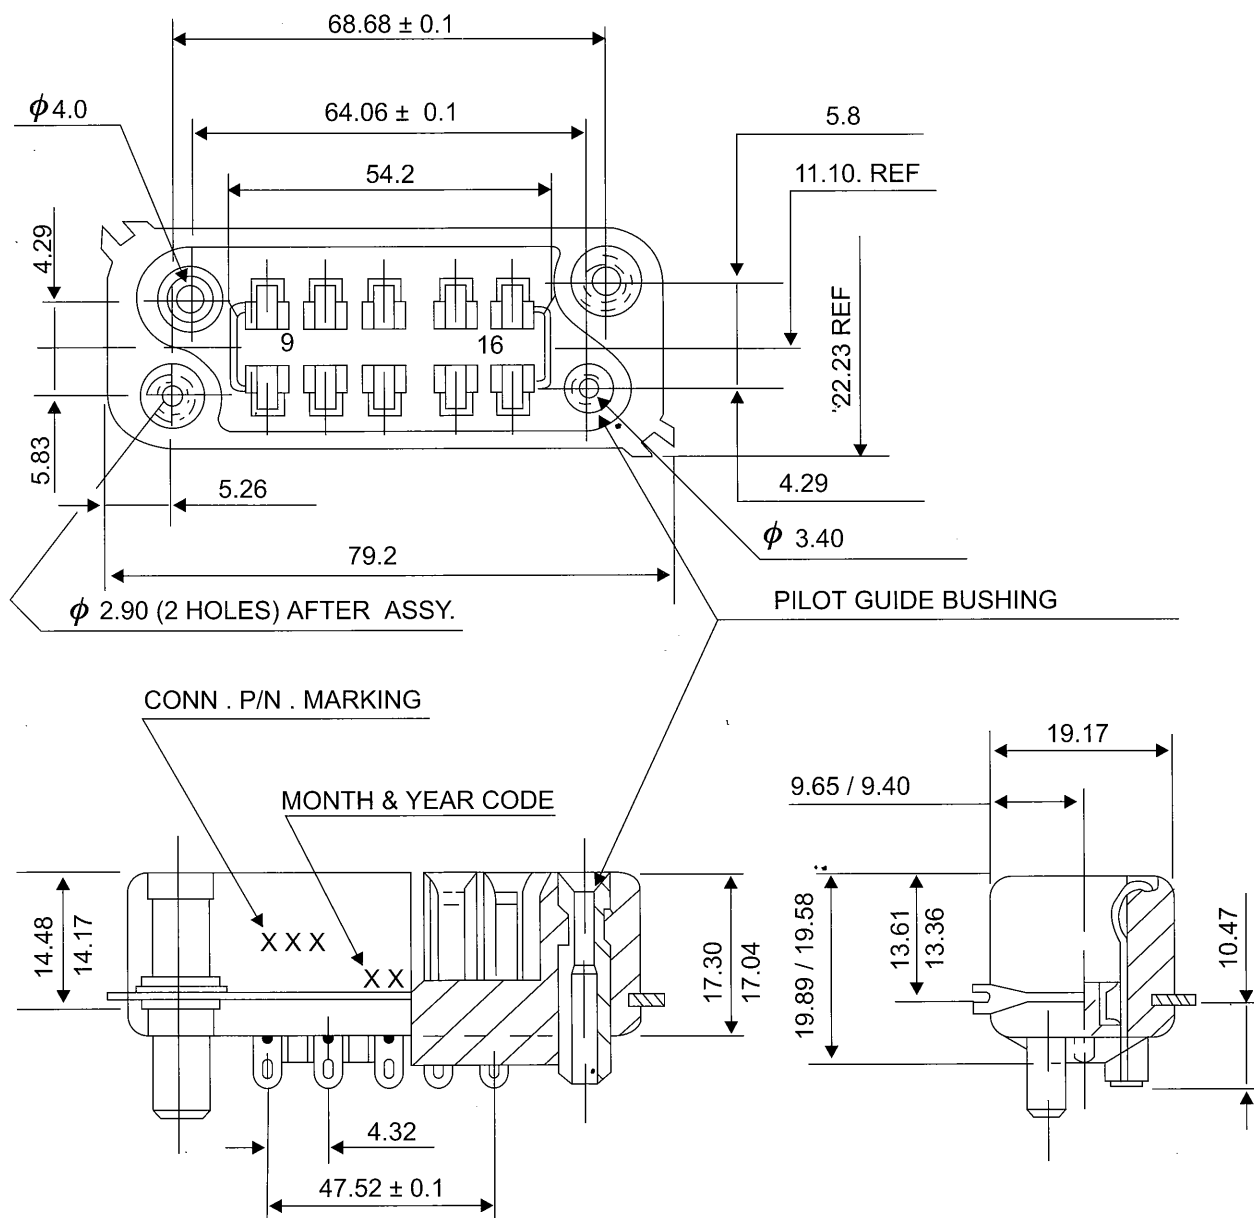

PART NO. DETAILS

SL. NO.	CONNECTOR P/N	NO. OF CONT.	TERMINATION TYPE	CONTACT FINISH	LEVEL
1	26-190-24S	24	SOLDER	GOLD PLATE OVER NICKEL	1
2	26-24S-004	24	SOLDER	GOLD PLATE OVER NICKEL	3
3	26-24S-99	24	SOLDER	SILVER PL. & TIN LEAD SOLDER DIP ON TERMINATION	—

All dimensions are in mm