

TRUCK RECD. ANGLE
OF AUG. POSITION.

NOTE: SEE FIG. 1

ADJUSTABLE

BACK PLATE TO BE REPOSITIONED USING
SCREW 4330-AS. MUST NOT BE
SCREWED IN SUFFICIENTLY TO PENETRATE
THROUGH THE FRONT FACE OF THE
MECHANISM.
DRAWING 101919



3	SCREW 4330-AS
2	SCREW 4330-AS

ITT. ELECTRONIC SERVICES

SL-MMD

5454619 FRA (MA)
SPT 1 OF 3

TO BE WRAPPED
AND PACKED IN TISSUE
AND CORRUGATED PAPER

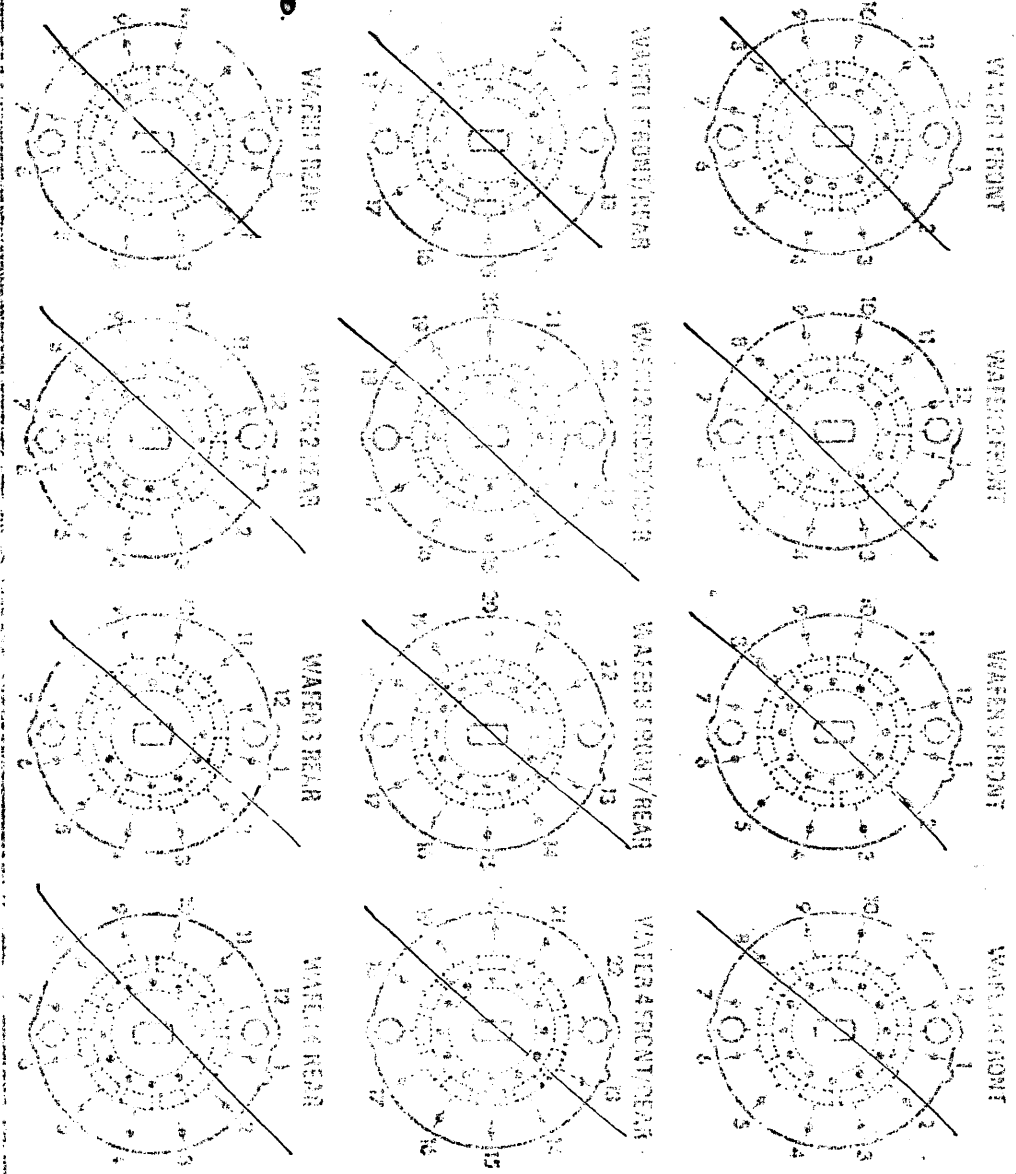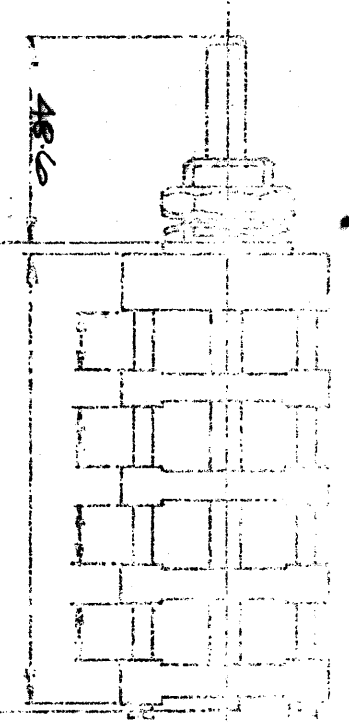

THE TABLE BELOW IS
FOR STANDARD SWITCHES
WITH NO SPACERS.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

50MM

SPT. 1 OF 3
5454619 FRA (MA)