
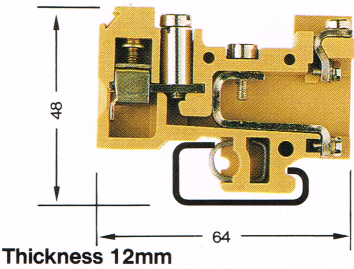


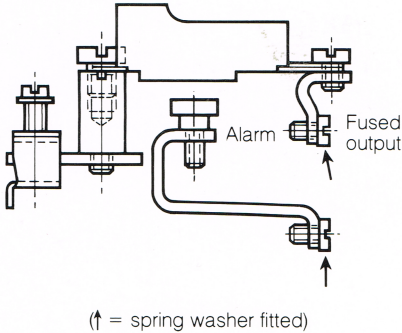


Alarm Fuse Terminal  
Type AFT  
Screw Clamp Connections



AFT Individual Input/Individual Alarm  
50V 9A



Technical Data		
Conductor size	Solid (mm²)	0.5–10
	Stranded (mm²)	0.5–6
Insulation stripping length	(mm)	13
Fuse type		PO 44/A
Ordering Data		Cat. No.
Moulding material	Melamine ●	035252
When ordering EEx'e' and Ex'N' terminals, add suffix 'e' or 'N' to the catalogue number		
Approvals		
All Approvals are listed in Approvals Guide		CEGB Ⓢ
Terminal Rail (2m)		
	Steel	TS 32 012280
	Steel (M6 Slots)	TS 32 067610
Locking pin (1m) — optional	Steel	SST 3 015270
End Bracket (thickness mm)		
	EWK 1 (8.5)	020616
End Plate (thickness mm)		
	Melamine ●	AP (1.5) 033302
Support Bracket (thickness mm)		
Busbar Connection		
Includes current rail and yoke with screw		
Alarm Busbar		
Standard length 25 ways		
Available 1–50 ways on request		
Main Busbar		
Standard length 25 ways		
Available 1–50 ways on request		
Spare Screw		
For ABB location		
		
Marking Tags		
All marking systems are shown in Section T6		DEKAFIX — Section T6

For additional accessories see Section T6