

L1045/C3 Single fusebox, size 0






With end and rear wire entries

L1033/C4 Double fusebox, size 0


With end and rear wire entries
A two-pole version of L1045/C3

Scale 1:2

Scale 1:2

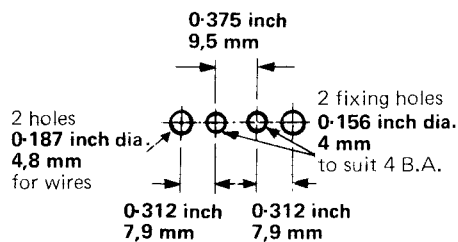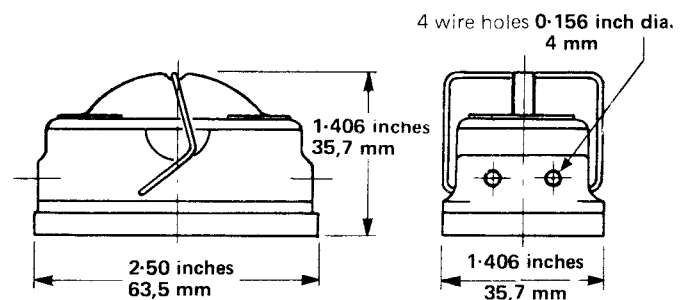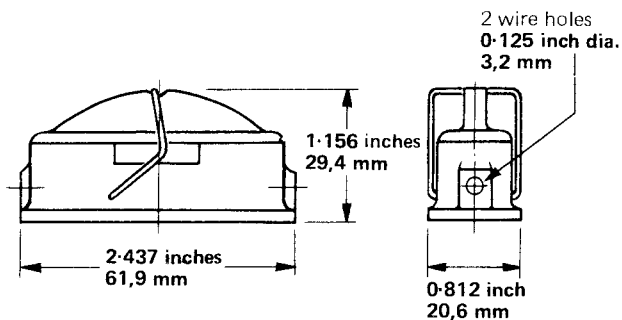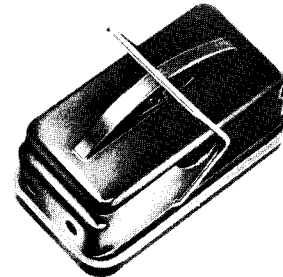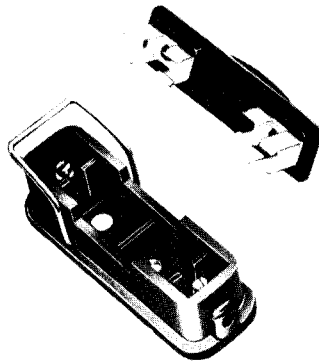

Panel cut-out

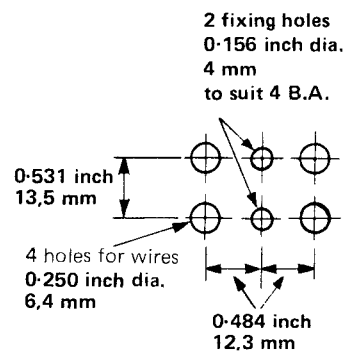

Panel cut-out

Designed for chassis mounting. A standard 1¼ inches x ¼ inch 32 mm x 6,3 mm fuse link is held in the lid and automatically exposed and isolated from the circuit as the lid is raised. Leads may be inserted through the base or through the ends of the box.

Current rating: 10 A (temperature rise $\leq 40^{\circ}\text{C}$)
Breakdown voltage (d.c.): to chassis $> 4\text{ kV}$
Temperature range: -40°C to $+85^{\circ}\text{C}$ (Ambient)
Weight (average): 22,1 g 0.78 oz

Current rating: 10 A (temperature rise $\leq 40^{\circ}\text{C}$)
Breakdown voltage (d.c.): Between poles $> 8\text{ kV}$
Poles to chassis $> 4\text{ kV}$
Temperature range: -40°C to $+85^{\circ}\text{C}$ (Ambient)
Weight (average): 47 g 1.68 oz