


## L1348C PANEL FUSEHOLDER



Design facilitates use for size 0 fuse links. This is a robust fuseholder, used extensively in Post Office and H.M. Services equipment. As an added safety feature the head is removable only with the aid of a tool (screwdriver, coin etc.).

<b>CURRENT RATING:</b>	<b>7A (temperature rise to <math>\leq 40^{\circ}\text{C}</math>) 15A at <math>55^{\circ}\text{C}</math> maximum ambient temperature</b>
<b>TEMPERATURE RANGE:</b>	<b><math>-25^{\circ}\text{C}</math> to <math>+100^{\circ}\text{C}</math> (ambient)</b>
<b>BREAKDOWN VOLTAGE:</b>	<b><math>&gt;9\text{kV}</math></b>
<b>INSERTION RESISTANCE</b>	<b><math>&lt;5</math> milliohms</b>
<b>INSULATION RESISTANCE</b>	<b><math>\geq 100</math> megohms</b>
<b>PANEL THICKNESS (MAX):</b>	<b>10mm</b>
<b>FIXING TORQUE:</b>	<b>0.57 Nm</b>
<b>HUMIDITY:</b>	<b>H2 (RCS 11)</b>
<b>MATERIAL:</b>	<b>Moulding, phenolic</b>

**ORDERING REFERENCE: L1348C**

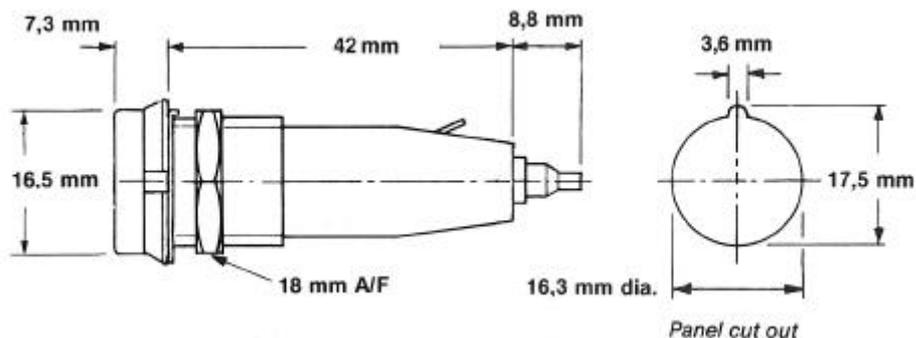

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England

Tel: +44 (0) 1638 665161 Fax: +44 (0) 1638 660718 email: [sales@blpcomp.com](mailto:sales@blpcomp.com) <http://www.blpcomp.com>

A subsidiary of Dialight plc