

L575A



Panel fuseholder for size 00 fuse links



This is a miniature fuseholder recommended for all situations where space is at a premium. There is a test probe aperture in the lid.

Current rating:	2,5 A (Temperature rise <55 °C)
Breakdown voltage (d.c.):	3,5 kV (sea level)
Temperature range:	- 40°C to + 70°C (ambient)
Insertion resistance:	5 milliohms (Average)
Insulation resistance:	≥100 megohms
Panel thickness (maximum):	1,6 mm
Fixing torque (maximum):	0,32 Nm
Materials:	Phenolic
Humidity:	Class H2
Weight:	5,3 g

Ordering reference: L575A

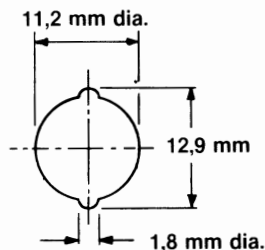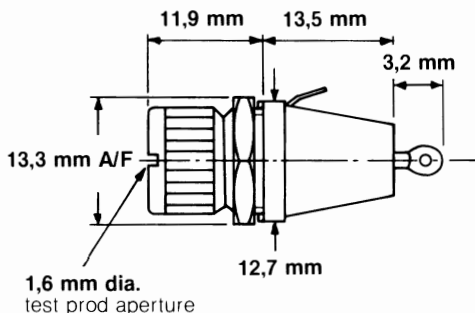

Panel cut out