


L575A PANEL FUSEHOLDER



Design facilitates use for size 00 fuse links. This is a miniature fuseholder recommended for all situations where space is at a premium. There is a test probe aperture in the lid.

CURRENT RATING:	2.5A (temperature rise to <math><55^{\circ}\text{C}</math>
TEMPERATURE RANGE:	<math>-40^{\circ}\text{c}< (ambient)<="" <math>+70^{\circ}\text{c}<="" b="" math>="" to=""></math>-40^{\circ}\text{c}<>
BREAKDOWN VOLTAGE:	3.5kV (sea level)
INSERTION RESISTANCE	5 milliohms (average)
INSULATION RESISTANCE	≥ 100 megohms
PANEL THICKNESS (MAX):	1.6mm
FIXING TORQUE:	0.32 Nm
HUMIDITY:	Class H2
MATERIAL:	Phenolic
WEIGHT:	5.3g
APPROVALS:	Conforms to BT 148A

ORDERING REFERENCE: L575A

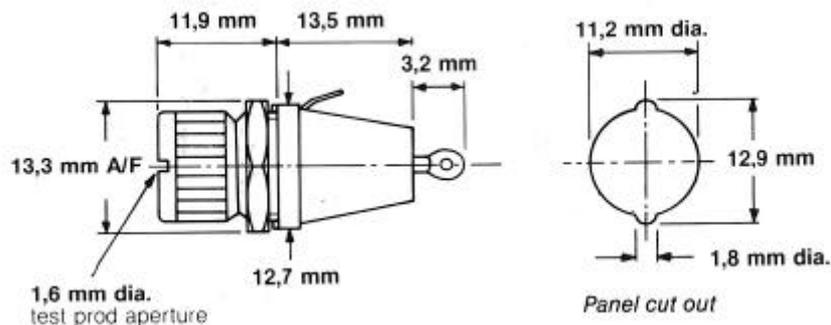

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0) 1638 665161 Fax: +44 (0) 1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>

□
A subsidiary of Dialight plc