



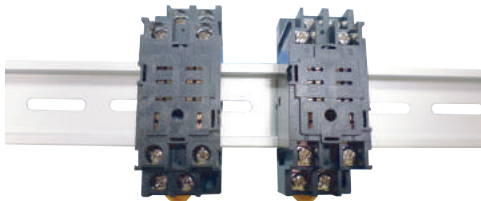


-Relay Socket Series-



STF-08A/AE 繼電器座(露出)



STF-08A



STF-08AE

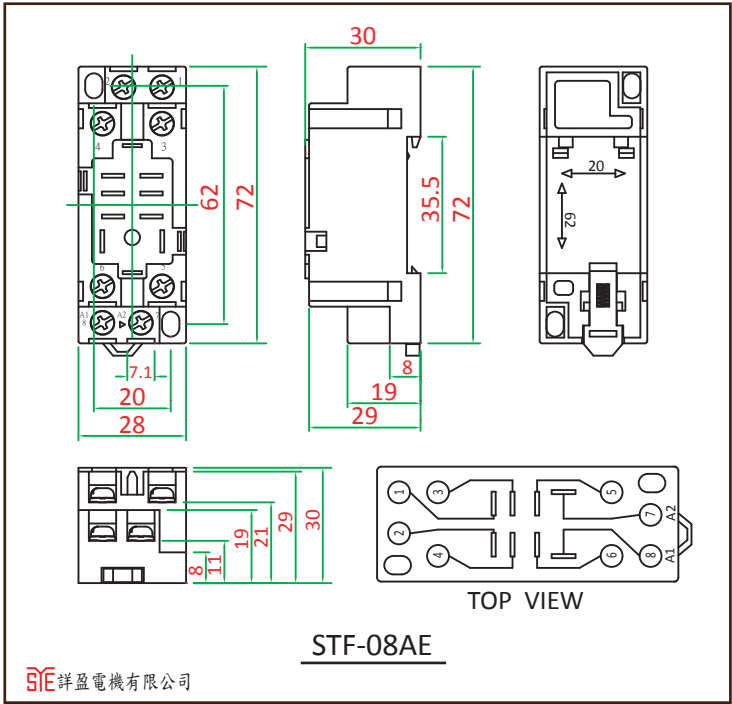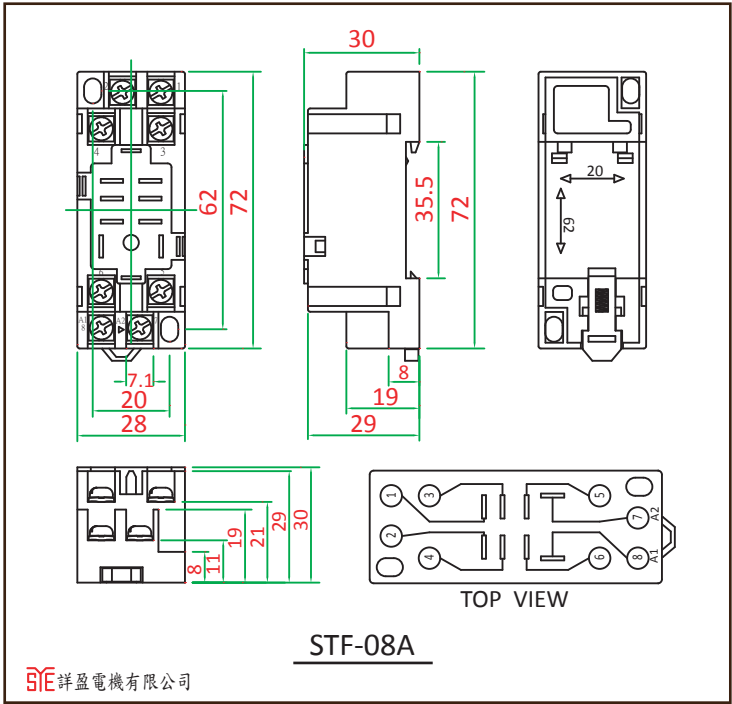

產品
Products

資訊
Information



一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V $\geq 500M\Omega$
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →250V AC 額定電流 Current rating →10 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC+GF(FRP)
導體 Conductor	磷銅 (Phosphor bronze)	C5191
螺絲 Screw	螺絲 Screw	3.5x7x6.7
	螺帽 Nut	3mm x 5.5 CHQ302
	硬度 Hardness	HV 200-220

其他 / Other

重量 Weight	48 $\pm$ 2g (STF-08A) 50 $\pm$ 2g (STF-08AE)
包裝 Packing	20 pcs per case
適用繼電器 Applicable Relays	台灣 Taiwan → LB-2P、SCL-1 國外 Oversea → LY-2、RH-2BU、HL-2、56.32
通過認證 Certification	CE、FI

