


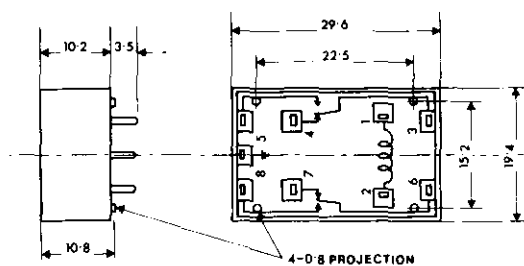


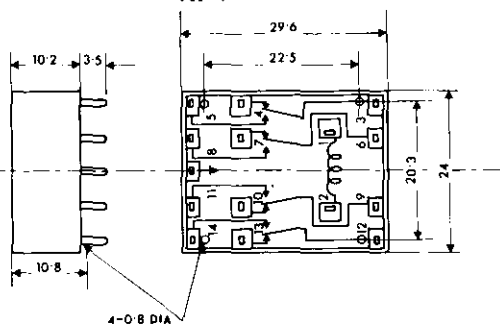
Types and coil data

Type	*Coil voltage (V DC)	Pull-in voltage (V at 25°C)	Drop-out voltage (V at 25°C)	Max V at 40°C	*Coil resistance (V at 25°C)	Inductance (H)	
						Armature open	Armature closed
NF2- 6V	6	4.2	0.6	10.5	137	0.093	0.094
NF2-12V	12	8.4	1.2	21	500	0.338	0.344
NF2-24V	24	16.8	2.4	42	2000	1.29	1.31

Type	*Coil voltage (V DC)	Pull-in voltage (V at 25°C)	Drop-out voltage (V at 25°C)	Max V at 40°C	*Coil resistance (V at 25°C)	Inductance (H)	
						Armature open	Armature closed
NF4- 6V	6	4.2	0.6	8.5	90	0.07	0.071
NF4-12V	12	8.4	1.2	17	330	0.22	0.23
NF4-24V	24	16.8	2.4	34	1200	0.77	0.79

Notes: *Less than 1,000Ω: ±10%. More than 1,000Ω: ±15%

Maximum allowable voltage at 40°C is twice nominal


Dimensions
NF2

NF4


all dimensions are in millimetres