

GLOSSARY

- **Carry current**

The value of the current which can be continuously applied to the relay contacts without opening or closing them and within the permissible temperature rise limit.

- **Dielectric strength**

The critical value at which a dielectric can withstand without rupturing when a high-tension voltage is applied for 1 minute between the same points as those in the measurement of insulation resistance.

- **Electrical service life**

The life of a relay when it is switched at the rated operating frequency with the rated load applied to its contacts.

- **Impulse withstand voltage**

The critical value indicating the durability of a relay against momentary voltage surges caused by lightning or generated when an inductive load is switched.

- **Insulation resistance**

The resistance offered by an insulating material when a voltage is applied between an electric circuit such as a relay contact or coil and a grounded non-current-carrying metallic part such as an iron core or core frame, or between contacts.

- **Maximum operating current**

A current which serves as a reference in determining the performance of the relay contacts. This value will never exceed the carry current. When using a relay, be careful not to exceed this value.

- **Maximum operating voltage**

A voltage which serves as a reference in determining the performance of the relay contacts. When using a relay, be careful not to exceed this value.

- **Maximum switching capacity**

The maximum value of the load capacity which can be practically switched without any problem. When using a relay, be careful not to exceed this value.


For example, when operating voltage V_1 is known, maximum operating current I_1 can be obtained at the point of intersection on the characteristic curve of Maximum switching capacity below. Conversely, maximum operating voltage V_1 obtained if I_1 is known.

$$\text{Maximum operating current } (I_1) = \frac{\text{Maximum switching capacity } [W (VA)]}{\text{Operating voltage } (V_1)}$$

$$\text{Maximum operating voltage } (V_1) = \frac{\text{Maximum switching capacity } [W (VA)]}{\text{Operating current } (I_1)}$$

For instance, if operating voltage = 40V
Maximum operating current = 2A ... *1


Maximum switching capacity

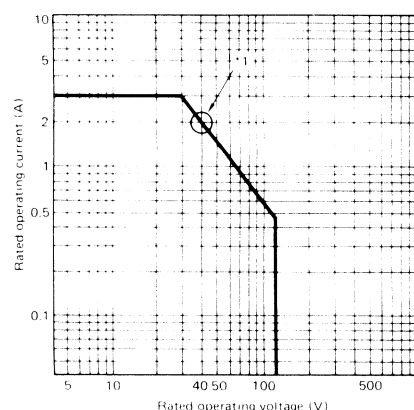

Next, the electrical service life of the relay can be determined from the service life curve based on the I_1 obtained above.

For instance, the electrical service life at the maximum operating current of 2A is slightly over 300,000 operations ... *2


Electrical service life

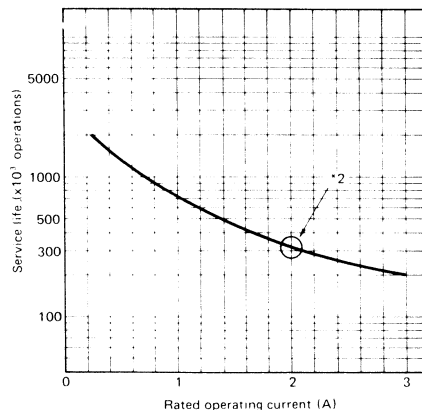

However, with a DC load, it may become difficult to break the circuit of 48V or more due to arcing. Be sure to check this using the relay actually.

Correlation between the contact ratings is as shown in the following figure.

Maximum switching capacity

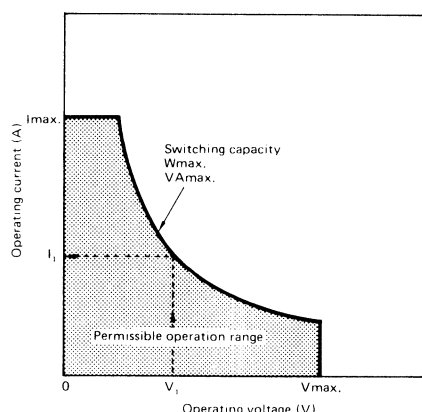

- **Maximum voltage**

The maximum value of permissible voltage fluctuations in the operating power supply of the relay coil.

- **Mechanical service life**

The life of a relay in terms of its mechanical functions when it is operated at the maximum mechanical operating frequency without applying any load to its contacts.

- **Must dropout voltage**

The value of a voltage at which a relay releases when the rated input voltage applied to the relay coil in the operating state is decreased gradually.

- **Must operate voltage**

The value of a voltage at which a relay operates when the input voltage applied to the relay coil in the reset state is increased gradually.

- **Minimum permissible load**

The value indicated as a standard to show the limit of the switching capability of a relay at minute load levels such as micro-electronic circuits. This value may vary depending on the operating frequency, ambient conditions, expected reliability level, etc. of the relay. It is recommended to doublecheck this under the actual load condition.

In this catalog, the minimum permissible load of each relay is indicated as a reference value. It indicates failure level at a reliability level of 60% (λ_{60}).

$\lambda_{60} = 0.1 \times 10^6$ /operation means that one failure is presumed to occur per 10,000,000 operations at the reliability level of 60%.

- **Operating frequency**

The switching frequency at which a relay operates and releases continuously. The maximum operating frequency of a relay must satisfy its electrical or mechanical life.

- **Power consumption**

The power consumption of a relay is indicated as the value of the power (rated voltage x rated current) to be consumed by the relay coil when the rated voltage is applied to the coil. With AC operated relays, their power consumption values are at the power frequency of 60Hz.

- **Rated load**

The value which serves as a reference in determining the performance of the relay contacts and is indicated by a combination of operating voltage and operating current.

- **Rated voltage**

A voltage which serves as a reference for control input.

- **Shock**

The shock resistance of a relay is divided into two categories; "Mechanical durability" which regulates the characteristic changes of, or damage to, the relay due to considerably large shocks which may develop during the transportation or mounting of the relay and "Malfunction durability" which regulates the malfunction of the relay while it is in operation.

- **Vibration**

The value of a voltage at which a relay releases when the rated input voltage applied to the relay coil in the operating state is decreased gradually.

large vibrations which may develop during the transportation or mounting of the relay, and "Malfunction durability" which regulates malfunction of the relay due to vibrations while it is in operation.

$$\alpha = 0.002f^2 A$$

α : Acceleration of vibration

f : Frequency


A : Double amplitude

TECHNICAL INFORMATION

How to Solder Unsealed Type PC Relays

● Manual Soldering

It is recommended that the PC relay be manually soldered after automatic soldering of other components to protect the relay contacts from excessive flux. When soldering, apply a soldering iron rated at 30 to 60W (tip temperature: 280 to 300°C) quickly (within 3sec) and firmly. Then, be sure to confirm that the relay operates normally. Process the PC board beforehand as shown below to prevent the relay mounting holes from being filled with solder and to facilitate subsequent manual soldering.

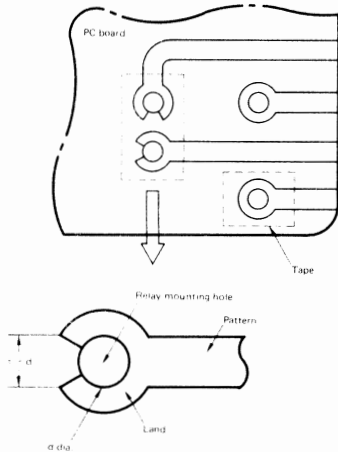

● Automatic flow soldering

1) Flux application

- Apply flux sparingly and evenly to prevent penetration of solder flux into the relay. In this case, adjust the position of flux level so that the upper surface of the PC board is not flooded with flux.
- Use an anti-corrosive rosin type flux.
- For flux solvent, use alcohol type which is less chemically reactive.
- Preheating process subsequent to flux application is effective to dry the applied flux, facilitate metal melting and prevent penetration of flux into the relay. However, when preheating the PC board, keep the temperature of the land side of the PC board to less than 80°C.

2) Soldering

- Move the bottom of the PC board over a flowing wave of molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37) JIS Z 3282.


3) Cooling

Cool forcibly the PC board with fan, etc.

4) Cleaning

As much as possible, avoid cleaning the terminals. When cleaning for some reason or other, care should be taken to the following:

- Use alcohol or freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.
- Clean the soldered PC board pattern side only to prevent the flux-contaminated solvent from entering the relay.

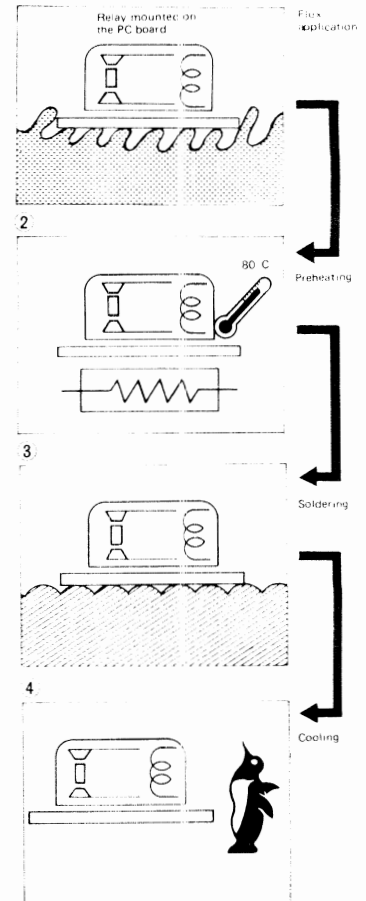

How to Solder Sealed Type PC Relays

● Soldering


Since the PC relay is of perfectly sealed construction, no problem should arise from automatic soldering or cleaning with the PC relay mounted on a PC board. However, please pay attention to the following points.

- Use an anti-corrosive rosin type flux.
- For flux solvent, use alcohol type which is less chemically reactive.
- When preheating the PC board after flux application, keep the temperature of the land side of the PC board to less than 80°C.
- Dip the bottom of the PC board into molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37 eutectic solder) JIS Z 3282.
- Use freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.

Low Profile Relay That Can Break from Minute Loads to 3A.

FEATURES

- Employs bifurcated crossbar contact for the contact mechanism and card-lift-off system for contact drive.
- Ultra-low profile design with very little base area is best suited for P.C. board use.
- 2.5mm or international 2.54mm grid terminal arrangement.
- Long service life realized through the provision of large contact follow with large armature stroke.

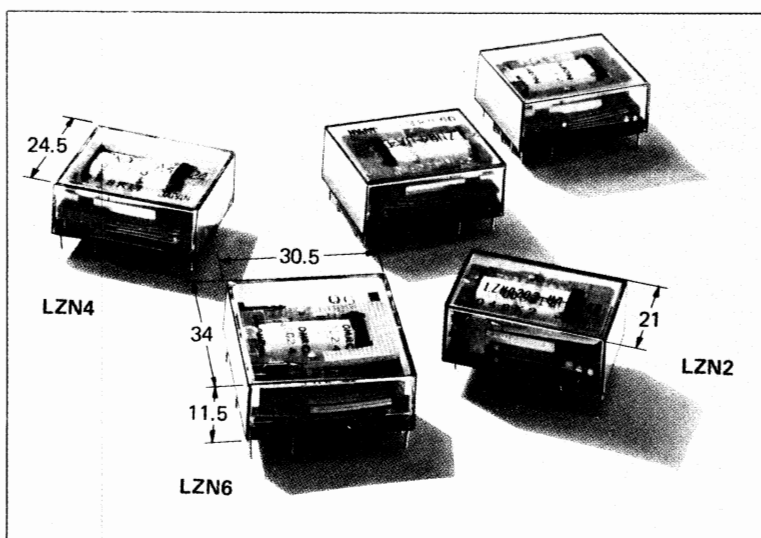

AVAILABLE TYPES

Classification	Type Contact form	General purpose		High capacity		Make-before-break contact	
		Unsealed	Sealed	Unsealed	Sealed	Unsealed	Sealed
Standard type	DPDT	LZN2	LZNQ2	LZN203	LZNQ203	LZN2M	LZNQ2M
	4PDT	LZN4	LZNQ4	LZN403	LZNQ403	LZN4M LZN4M1	LZNQ4M LZNQ4M1
	6PDT	LZN6	LZNQ6	—	—	LZN6M1	LZNQ6M1
Standard approved type	DPDT	LZN2-US	LZNQ2-US	LZN203-US	LZNQ203-US	LZN2M-US	LZNQ2M-US
	4PDT	LZN4-US	LZNQ4-US	LZN403-US	LZNQ403-US	LZN4M-US LZN4M1-US	LZNQ4M-US LZNQ4M1-US
	6PDT	LZN6-US	LZNQ6-US	—	—	LZN6M1-US	LZNQ6M1-US

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Contact form	Rated voltage (V)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)	Armature OFF	Armature ON	Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (W)
DPDT	DC	5	58.8	85	0.4	0.7				
		6	42.9	140	0.55	0.95				
		12	24	500	2	3.5				
		24	12	2000	7.5	13			170	Approx 0.3
		48	6.9	7000	28	50				
		60	6.1	9800	31	54				
4PDT	DC	5	96.2	52	0.22	0.3				
		6	70.6	85	0.4	0.5				
		12	36.4	330	1.6	2				
		24	20	1200	5.2	6.5		10 min.	140	Approx 0.48
		48	11.4	4200	17.5	22				
		60	8.6	7000	29	37				
6PDT	DC	5	166.7	30	0.115	0.12				
		6	133.3	45	0.15	0.16				
		12	64.9	125	0.73	0.76				
		24	33.3	720	2.6	2.7				
		48	17.1	2800	11.5	12	80 max.		110	Approx 0.8
		60	14.3	4200	16	16				

NOTE: The rated current, coil resistance and inductance are measured at a coil temperature of 20 °C with tolerances of +15%, -20% for AC rated current and +15% for DC rated current, and +15% for rated coil resistance.


CONTACT RATINGS

Type	General purpose & make before break contact		High capacity	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Item				
Rated load	110 VAC 0.5A 24 VDC 1A (24 VDC) (0.7A)	110 VAC 0.25A 24 VDC 0.5A (24 VDC) (0.35A)	110 VAC 1A 24 VDC 3A	110 VAC 1A 24 VDC 1.5A
Carry current	3A			
Max. operating voltage	250 VAC, 125 VDC			
Max. operating current	2A (1A)	1A (0.5A)	3A	1.5A
Max. switching capacity	110VA (60VA) 60W (30W)	60VA (30VA) 30W (15W)	220VA 120W	110VA 60W
Minimum permissible load	0.1 VDC 100μA (ref. value)		5 VDC 1mA (ref. value)	


NOTE: Data in parentheses apply to the make-before-break contact type only.

CHARACTERISTIC DATA


Maximum switching capacity
LZN2, LZN4, LZN6




LZN203, LZN403



Electrical service life
LZN2, LZN4, LZN6



LZN203, LZN403




CHARACTERISTICS

Type	General purpose	High capacity	Make-before-break contact
Item			
Contact resistance	100mΩ max.		
Operate time	15msec max.		
Release time	10msec max.		
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)		
Insulation resistance	100MΩ min. (at 500 VDC)		
Dielectric strength	1,000 VAC, 50/60Hz for 1 minute (750 VAC between non-continuous contacts)		1,000 VAC, 50/60Hz for 1 minute (400 VAC between non-continuous contacts)
Vibration	Mechanical durability: 10 to 55Hz; 3mm double amplitude Malfunction durability: 10 to 110Hz; 0.85mm double amplitude (10 to 50Hz; 0.85mm double amplitude in the direction of armature operation)		
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: When energized: 150m/sec ² (approx. 15G's) When de-energized: 100m/sec ² (approx. 10G's) (4G's min. in the direction of armature operation)		
Ambient temperature	Operating: -10 to +60°C		
Humidity	45 to 85% RH		
Service life	Mechanically: 100,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."		
Weight	DPDT: 13g 4PDT: 15g 6PDT: 17g		

NOTE: The data shown are of initial value.


DIMENSIONS

LZN2, LZN203, LZN2M

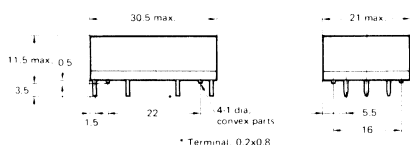


* Terminal: 0.2x0.8

LZN4, LZN403, LZN4M(1)

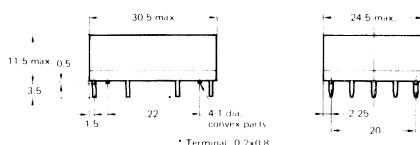

* Terminal: 0.2x0.8

LZN6, LZN6M1

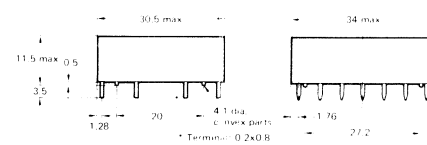

* Terminal: 0.2x0.8


↑
Bottom view

Terminal arrangement (Bottom view)

LZN2, LZN203




LZN2M




LZN4, LZN403



LZN4M




LZN4M1




LZN6



LZN6M1




Mounting holes DPDT




NOTE: Terminal pitch is 2.5mm x number of grids. 2.54mm (0.1 inch) grid terminals may also be used.

4PDT




6PDT



HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

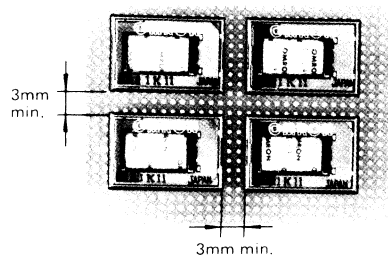

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings
General purpose & make before break contact	DPDT 4PDT 6PDT	5 to 60 VDC	0.5A 100 VAC (resistive load) 0.4A 100 VAC (inductive load) 2A 30 VDC (inductive load)
High capacity			2A 100 VAC (resistive load) 1.6A 100 VAC (inductive load) 3A 30 VDC (inductive load)

CSA certified type (File No. LR24825-24)

Type	Contact form	Coil ratings	Contact ratings
General purpose & make before break contact	DPDT 4PDT 6PDT	5 to 60 VDC	0.5A 125 VAC (resistive load) 0.4A 125 VAC (inductive load) 2A 30 VDC (resistive load)
High capacity			2A 100 VAC (resistive load) 1.6A 125 VAC (inductive load) 3A 30 VDC (resistive load)


NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.

To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

**Low Profile, PC Board-use
Magnetic Latching Relay
Ideal for Memory Circuit**

FEATURES

- Latching ability little affected by aging, and excellent resistance to vibration and shock.
- Continuous coil ratings.
- Long life — 100 million mechanical operations.
- Sealed type is also available.

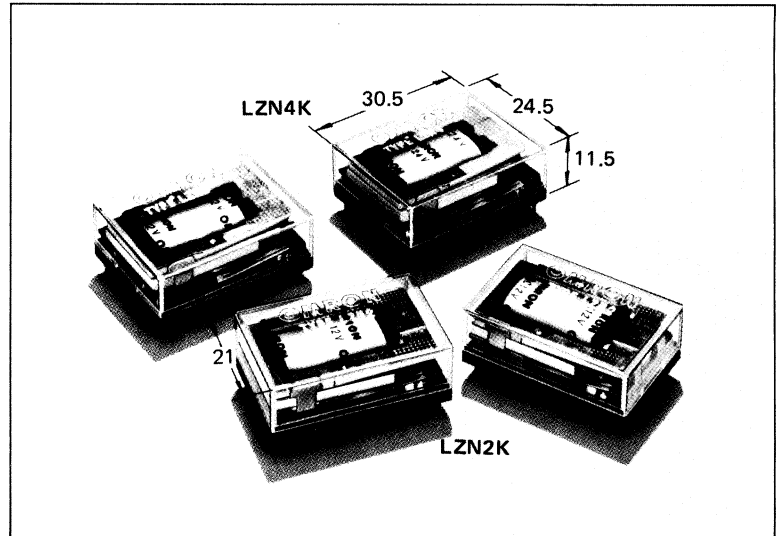

AVAILABLE TYPES

Type Contact form Classi- fication		General purpose		High capacity	
		Unsealed	Sealed	Unsealed	Sealed
Standard type	DPDT	LZN2K	LZNQ2K	LZN203K	LZNQ203K
	4PDT	LZN4K	LZNQ4K	LZN403K	LZNQ403K
Standard approved type	DPDT	LZN2K-US	LZNQ2K-US	LZN203K-US	LZNQ203K-US
	4PDT	LZN4K-US	LZNQ4K-US	LZN203K-US	LZNQ403K-US

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Type	Rated voltage (V)	Set coil				Reset coil			Must set voltage	Must reset voltage	Maximum voltage	Power consumption (VA, W)	
		Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)					
				Armature OFF	Armature ON			Armature OFF					
LZN2K	5 VDC	204	24.5	0.051	0.094	192	26	0.014	80 max.	80 max.	110	Approx. 1	Approx. 1
LZN203K	6 VDC	179	33.5	0.064	0.117	152	39.5	0.022					
LZNQ2K	12 VDC	85.7	140	0.28	0.51	85.7	140	0.07					
24 VDC	44	545	1.1	2	45.7	525	0.25						
LZNQ203K	48 VDC	20.7	2,320	4.4	8	17.8	2,700	1.2					
LZN4K	5 VDC	246	20.3	0.041	0.065	266	18.8	0.01				Approx. 1.3	Approx. 1.3
LZN403K	6 VDC	224	26.8	0.053	0.085	210	28.6	0.016					
LZNQ4K	12 VDC	100	120	0.26	0.42	118	102	0.054					
24 VDC	57.8	415	0.82	1.3	53.3	450	0.24						
LZNQ403K	48 VDC	30	1,600	2.8	4.5	24.6	1,950	0.87					

NOTES: 1. The rated current is measured at a coil temperature of 20°C with tolerances of +15%, -20%.
2. Performance characteristic data are measured at a coil temperature of 5 to 35°C.

CONTACT RATINGS

Load Item	General purpose type		High capacity type	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Rated load	110 VAC 0.5A 24 VDC 1A	110 VAC 0.25A 24 VDC 0.5A	110 VAC 2A 24 VDC 3A	110 VAC 1A 24 VDC 1.5A
Carry current	3A		3A	
Max. operating voltage	250 VAC 125 VDC		250 VAC 125 VDC	
Max. operating current	2A	1A	3A	1.5A
Max. switching capacity	110VA, 60W	60VA, 30W	220VA, 120W	110VA, 60W
Minimum permissible load	0.1 VDC 0.1mA (ref. value)		—	


CHARACTERISTICS

Contact resistance	30mΩ max.
Operate time	15msec max.
Release time	10msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	2,500 VAC, 50/60Hz for 1 minute (1,000 VAC between non-continuous contacts)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 0.8mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -40 to +70°C
Humidity	45 to 85%RH
Service life	Mechanically: 20,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 15g


NOTE: The data shown are of initial value.

DIMENSIONS

G2L-113P

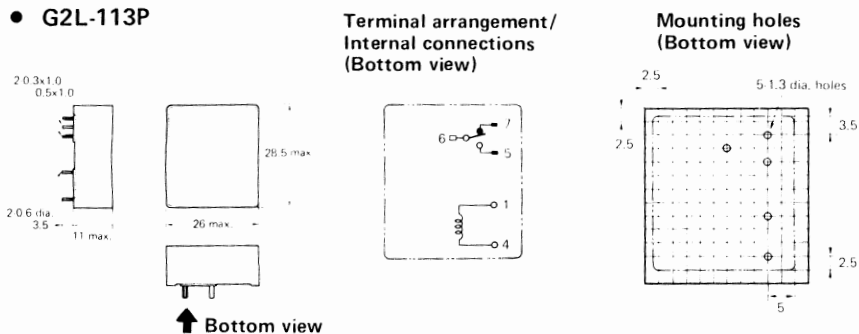


G2L-113P-V

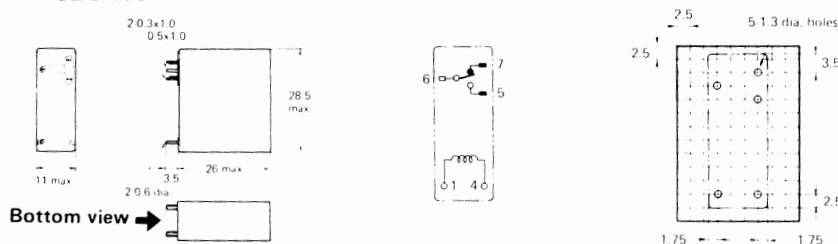

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

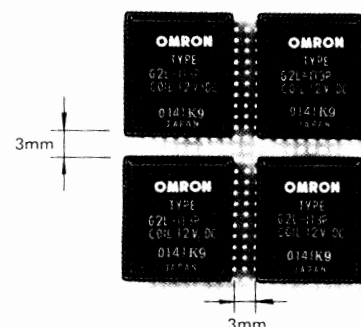

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings
G2L-113P-US	SPDT	3 to 60 VDC	10A 250 VAC or 8A 24 VDC (resistive load) TV-5
G2L-113P-V-US			

CSA certified type (File No. LR24825-25)

Type	Contact form	Coil ratings	Contact ratings
G2L-113P-US	SPDT	3 to 60 VDC	10A 250 VAC or 8A 24 VDC (resistive load) TV-5
G2L-113P-V-US			

SEV listed type (File No. D791/262)


Type	Contact form	Coil ratings	Contact ratings
G2L-113P-US	SPDT	3 to 60 VDC	8A 220 VAC (resistive load)
G2L-113P-V-US			

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

Subminiature, Economical Relay with 10A Switching Capacity

FEATURES

- Space saver ideal for equipment miniaturization, satisfying all requirements for use in household electric appliances.
- Direct soldering to PCB is possible.

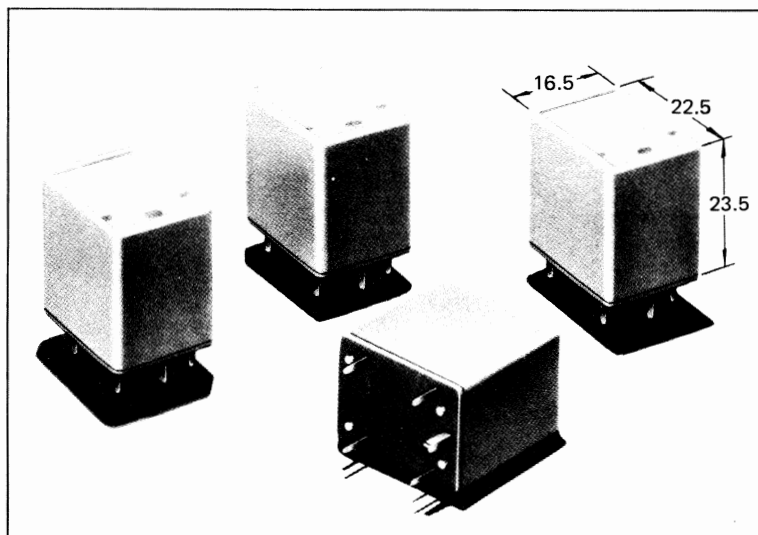

AVAILABLE TYPES

Classification	Type	General purpose	High capacity
	Contact form		
Standard type	SPDT	LC1N-05	LC1N-10
	SPST-NO	—	LC1N-10-100
Standard approved type	SPDT	LC1-05-US	LC1-10-US
	SPST-NO	—	LC1N-10-100-US

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Item	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
Rated voltage			% of rated voltage					
6 VDC	60	100	0.34	0.51	75 max.	10 min.	130 max.	Approx. 360
12 VDC	30	400	1.2	2.3				
24 VDC	15	1,600	4.8	8.0				

NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of +15%, -20% for rated current and ±10% for rated coil resistance.

CONTACT RATINGS

Type Load Item	LC1N-05		LC1N-10(-100)	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4; L/R =7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4; L/R =7msec)
Rated load	110 VAC/24 VDC 5A 220 VAC 2A	—	110 VAC/24 VDC 10A 220 VAC 5A	—
Carry current	5A		10A	
Max. operating voltage	250 VAC, 60 VDC			
Max. operating current	5A	—	10A	—
Max. switching capacity	600VA 120W	—	1200VA 240W	—
Minimum permiss- ible load (ref. value)	—			


CHARACTERISTICS

Contact resistance	100mΩ max.
Operate time	15msec max.
Release time	5msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	1,500 VAC, 50/60Hz for 1 minute (750 VAC between non-continuous contacts)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude
Shock	Mechanical durability: 1,000m/s ² (approx. 100G's) Malfunction durability: 100m/s ² (approx. 10G's)
Ambient temperature	Operating: -25 to +60°C
Humidity	45 to 85% RH
Service life	Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 14g


NOTE: The data shown are of initial value.

CHARACTERISTIC DATA


Maximum switching capacity




Electrical service life LC1N-05



LC1N-10




DIMENSIONS

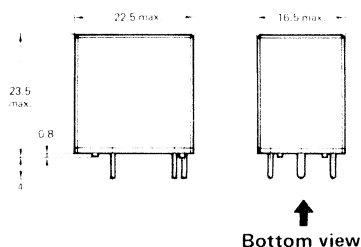


Terminal arrangement (Bottom view)

LC1N-05, LC1N-10 (SPDT type)




Mounting holes (Bottom view)

LC1N-05, LC1N-10 (SPDT type)




LC1N-10-100 (SPST-NO type)



HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

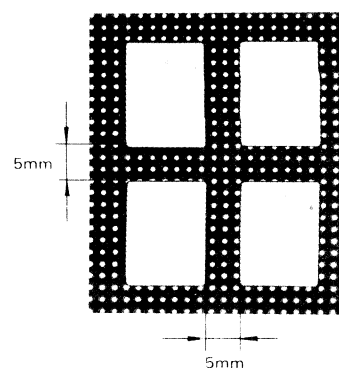

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings
LC1N-10-US	SPDT	6, 12 and 24 VDC	10A 120 VAC/28 VDC (resistive load)
LC1N-10-100-US	SPST-NO		
LC1N-05	SPDT		5A 120 VAC/28 VDC (resistive load)

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


Sugar Cube-Sized High-Reliability Relay Ideal for Minute Load Switching

FEATURES

- Contacts employing gold-clad silver-paladium alloy with crossbar construction assure high contact reliability.
- Contact section located opposite the terminal section provides a greater creepage distance, and is resistant to solder flux wicking.
- International 2.5mm grid terminal arrangement.
- Movable contact piece of the triple arm construction assures extended service life and stable operation.

AVAILABLE TYPES

Classification	Type	General purpose	High capacity
	Contact form		
Standard type	SPDT	G2K	G2K-3
Standard approved type		G2K-US	G2K-3-US

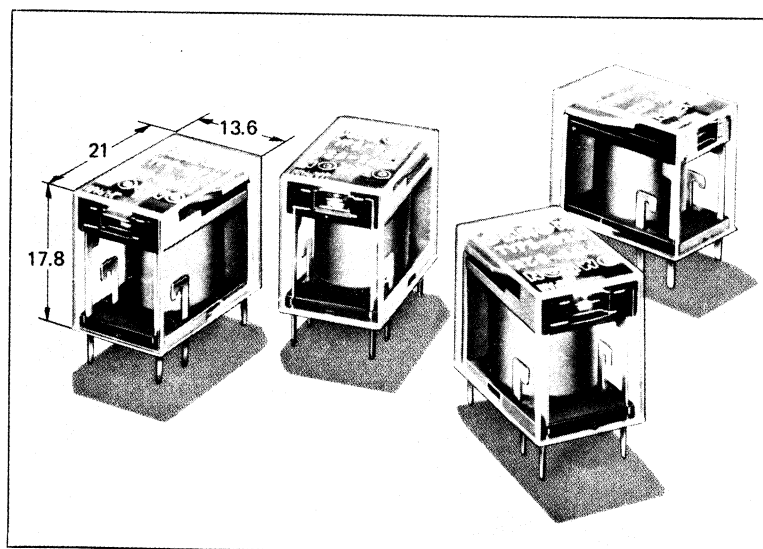

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Item Rated voltage (Color code on coil)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
6 VDC (Red)	60	100	0.277	0.441	75 max.	10 min.	130 max.	Approx. 360
9 VDC (Yellow)	40	225	0.673	1.16				
12 VDC (Blue)	30	400	1.01	1.84				
24 VDC (Green)	15	1,600	4.04	5.66				


NOTE: The rated current and coil resistance are measured at a coil temperature of 20 °C with tolerances of +15%, -20% for rated current and ±10% for rated coil resistance.

CONTACT RATINGS


Type Load Item	G2K		G2K-3	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R =7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R =7msec)
Rated load	110 VAC 0.5A, 24 VDC 1A	110 VAC 0.2A, 24 VDC 0.3A	110 VAC/ 24 VDC 3A	110 VAC/ 24 VDC 1.5A
Carry current	2A		5A	
Max. operating voltage	125 VAC, 60 VDC			
Max. operating current	1A		3A	2A
Max. switching capacity	120VA, 30W	60VA, 15W	300VA, 70W	150VA, 40W
Min. permissible load (ref. value)	5VDC 1mA		50 VDC 100mA	

CHARACTERISTIC DATA


Maximum switching capacity G2K




Electrical service life G2K



G2K-3



G2K-3




CHARACTERISTICS

Type	G2K	G2K-3
Item		
Contact resistance	50mΩ max.	100mΩ max.
Operate time	15msec max.	
Release time	5msec max.	
Operating frequency	Mechanically: 18,000 operations/hour; Electrically: 1,800 operations/hour (under rated load)	
Insulation resistance	100MΩ min. (at 500 VDC)	
Dielectric strength	1,000 VAC, 50/60Hz for 1 minute (500 VAC between non-continuous contacts)	
Vibration	Mechanical and malfunction durability: 10 to 55Hz; 1.5mm double amplitude	
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)	
Ambient temperature	Operating: -30 to +70°C	
Humidity	45 to 85% RH	
Service life	Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."	
Weight	Approx. 11g	


NOTE: The data shown are of initial value.

DIMENSIONS

G2K(-3)

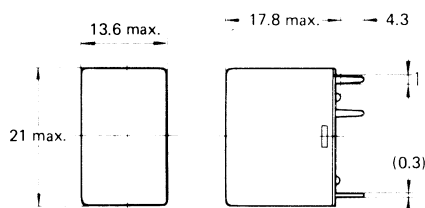


Bottom view



(Bottom view)


Terminal arrangement/
Internal connections



(Bottom view)

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

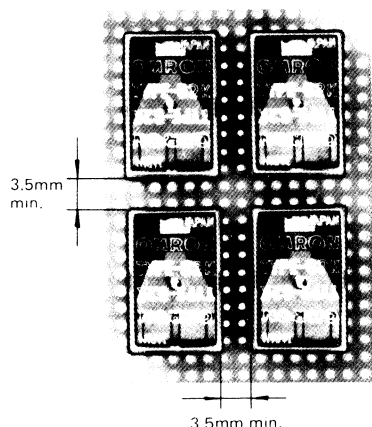

STANDARD APPROVED TYPE

When placing your order for UL or CSA approved versions, please indicate "UL" or "CSA" as desired in addition to the model number.

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)/CSA certified type (File No. LR34815, -6, -7, -8)

Type	Contact form	Coil ratings	Contact ratings
G2K-US	SPDT	3 to 48 VDC	0.5A 120 VAC or 1A 28 VDC (resistive load)
G2K-3-US			3A 120 VAC or 3A 28 VDC (resistive load)

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.

To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

OMRON PC BOARD-USE RELAY


Cat. No. K06-E1-3

Model **G2E**

High-sensitivity (290mW), Sugar Cube-Sized PCB Relay

FEATURES

- Standard terminal arrangement on 2.5mm grid.
- Fast response (5msec operate time).
- Crossbar contacts (gold-clad silver-palladium).
- Contact section located opposite the terminal section and dust-proof cover prevent solder flux wicking.
- Sealed type is available.

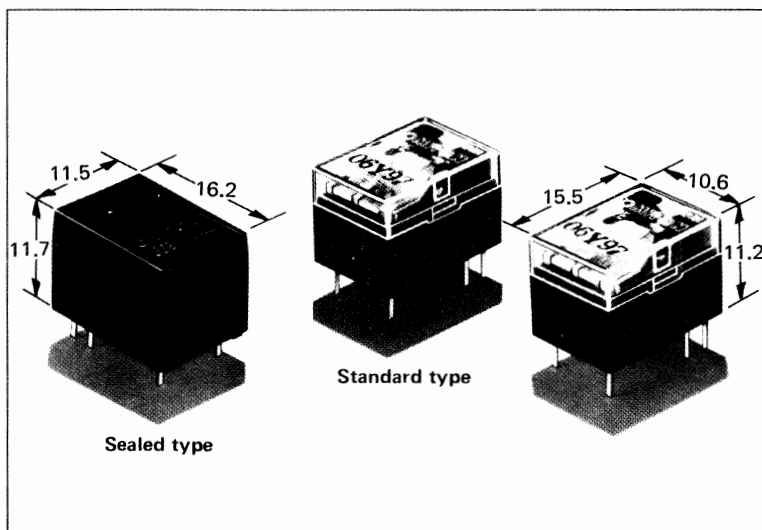

AVAILABLE TYPES

Type		General purpose		High-sensitivity	
		Standard type	Sealed type	Standard type	Sealed type
SPDT	Single crossbar	G2E	G2E-184P	G2E-182P-H	G2E-184P-H
	Bifurcated crossbar	G2E-132P	G2E-134P	G2E-132P-H	G2E-134P-H

OMRON

SPECIFICATIONS

COIL RATINGS (Value in parentheses applies to High-sensitivity type.)

Item Rated voltage (Color code on coil)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
1.5 VDC (Brown)	300(—)	5(—)	0.005(—)	0.009(—)	70 max. (80 max.)	10 min.	110 max. (130 max.)	Approx. 450 (Approx. 200)
3 VDC (Purple)	150(—)	20(—)	0.017(—)	0.034(—)				
5 VDC (Orange)	89.3(41.7)	56(120)	0.044(—)	0.091(—)				
6 VDC (Red)	75(33.3)	80(180)	0.067(—)	0.136(—)				
9 VDC (Yellow)	50(22.5)	180(400)	0.137(—)	0.297(—)				
12 VDC (Blue)	37.5(17.1)	320(700)	0.229(—)	0.496(—)				
24 VDC (Green)	18.8(8.6)	1,280(2,800)	0.94(—)	2.1(—)				


NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of +15%, -20% for rated current and $\pm 10\%$ for coil resistance.

CONTACT RATINGS


Item	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Rated load	110 VAC 0.5A 24 VDC 1A	110 VAC 0.2A 24 VDC 0.3A
Carry current	2A	
Max. operating voltage	125 VAC, 60 VDC	
Max. operating current	1A	
Max. switching capacity	120VA 30W	60VA 15W
Minimum permissible load (reference value)	5 VDC 1mA	

CHARACTERISTIC DATA

Maximum switching capacity



Electrical service life




CHARACTERISTICS

Contact resistance	100mΩ max.
Operate time	5msec max. (General purpose type), 10msec max. (High-sensitivity type)
Release time	5msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	500 VAC, 50/60Hz for 1 minute
Vibration	Mechanical and malfunction durability: 10 to 55Hz; 3.3mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -25 to +55°C (General purpose type), -25 to +65°C (High-sensitivity type)
Humidity	45 to 85% RH
Service life	Mechanically: 5,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 3.7g


NOTE: The data shown are of initial value.

DIMENSIONS

G2E, G2E-132P(-H), G2E-182P(-H)

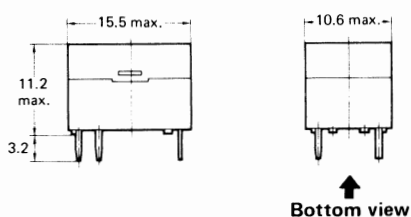


Terminal arrangement/
Internal connections




(Bottom view)

Mounting holes




(Bottom view)

G2E-184P(-H), G2E-134P(-H)

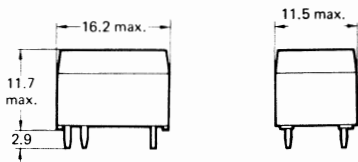

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

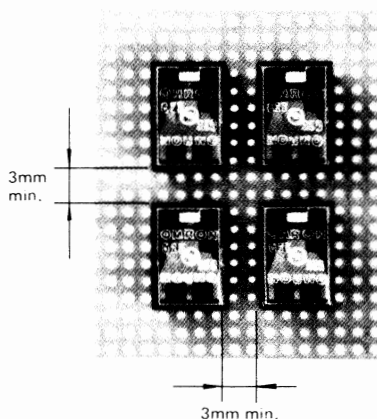

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

OMRON PC BOARD-USE RELAY


Cat. No. K07-E1-3

Model **G2V**

Ultra Small, Highly Reliable DIP Type Relay

FEATURES

- High contact reliability with bifurcated crossbar contacts. Single crossbar contact type also available.
- Wide switching capacity from 100 μ A to 2A loads.
- Construction resistant to flux wicking—automatic flow soldering is possible.
- Permits 15.5mm pitch PC board rack mounting.
- 16-pin DIP IC socket can be used.

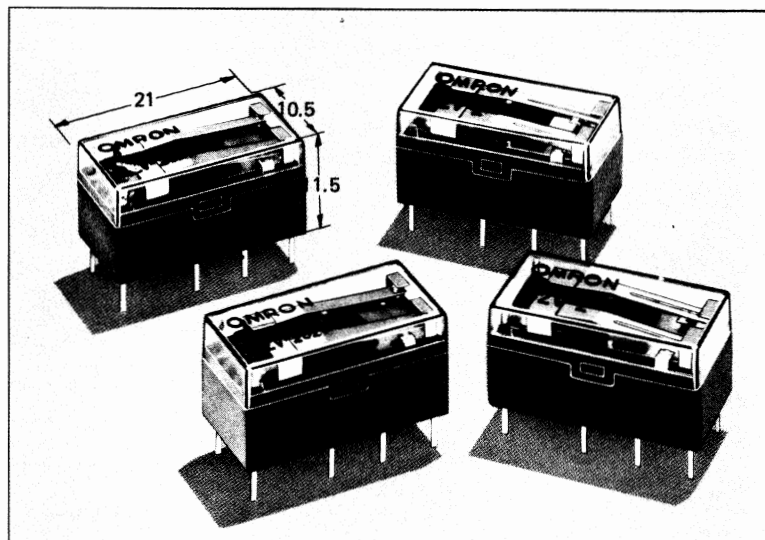

AVAILABLE TYPES

Contact type Contact form	Bifurcated crossbar	Single crossbar
DPDT	G2V-2	G2V-282P

SPECIFICATIONS

COIL RATINGS

Item \ Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3 VDC	188	16	0.031	0.041	80 max.	10 min.	125 max.	Approx. 560
5 VDC	111	45	0.075	0.113				
6 VDC	100	60	0.12	0.168				
12 VDC	42.9	280	0.537	0.789				
24 VDC	22.9	1,050	1.36	2.06				


NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of $\pm 10\%$.

CONTACT RATINGS


Type \ Load	G2V-2		G2V-282P	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4; L/R=7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4; L/R=7msec)
Rated load	110 VAC 0.3A 24 VDC 1A	110 VAC 0.2A 24 VDC 0.3A	110 VAC 0.3A 24 VDC 1A	110 VAC 0.2A 24 VDC 0.3A
Carry current	2A			
Max. operating voltage	125 VAC, 125 VDC			
Max. operating current	2A			
Max. switching capacity	60VA 30W	20VA 10W	60VA 30W	20VA 10W
Minimum permissible load (reference value)	0.1 VDC 100 μ A		1 VDC 1mA	

CHARACTERISTIC DATA


Maximum switching capacity G2V-2, G2V-282P



Electrical service life G2V-2



G2V-282P




CHARACTERISTICS

Type	G2V-2	G2V-282P
Item		
Contact resistance	100mΩ max.	
Operate time	8msec max.	
Release time	5msec max.	
Operating frequency	Mechanically: 18,000 operations/hour; Electrically: 3,600 operations/hour (under rated load)	
Insulation resistance	100MΩ min. (at 500 VDC)	
Dielectric strength	1,000 VAC, 50/60Hz for 1 minute (500 VAC between non-continuous contacts)	
Vibration	Mechanical and malfunction durability: 10 to 55Hz; 1.5mm double amplitude	
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 200m/sec ² (approx. 20G's)	
Ambient temperature	Operating: -25 to +50°C	
Humidity	45 to 85% RH	
Service life	Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."	
Weight	Approx. 4.5g	


NOTE: The data shown are of initial value.

DIMENSIONS


G2V-2, G2V-282P

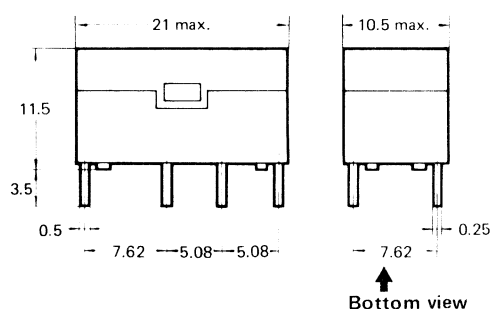

Terminal arrangement/Internal connections
(Bottom view)




Mounting holes



NOTE: When a socket is to be used, use of a DIN 16 pin IC socket is recommended.

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

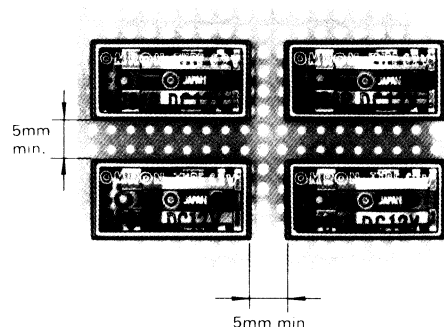

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


High-sensitivity (80mW), DIP Type Relay for Interface Devices

FEATURES

- Sealed and 8mm thick.
- Direct drive by TTL, DTL or IC is possible.
- Bifurcated contact construction employing gold alloy assures high reliability at low signal levels.
- Short contact bounce time (approx. 20μsec).
- Shield plate prevents contacts from being affected adversely by noise generated by coil.
- High shock and vibration resistance is assured by the balanced armature system.
- Thermoelectromotive force as low as 5μV max., ideal for analog signals.
- Conforms to UL, CSA and VDE.

AVAILABLE TYPES

Type	General purpose
Contact form	
SPST-NO+SPST-NC	G2N-2124P

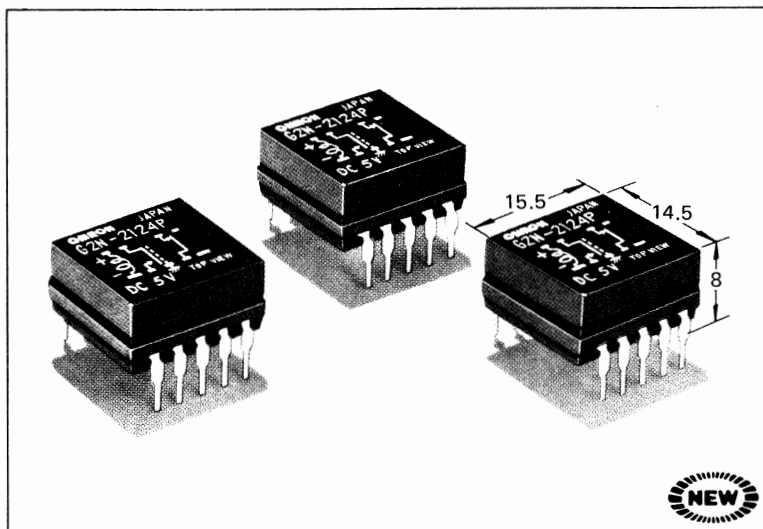

OMRON

SPECIFICATIONS

COIL RATINGS

<div>Item</div>	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
Rated voltage					% of rated voltage			
3 VDC	41.7	72	0.09	0.12	80 max.	10 min.	110 max.	Approx. 125
5 VDC	25.0	200	0.23	0.31				
12 VDC	10.4	1,150	1.44	1.91				
24 VDC	6.1	3,940	4.31	5.72				Approx. 150


NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of ±10%.

CONTACT RATINGS

Item	Load
Rated load	24 VDC 0.3A
Carry current	0.3A
Max. operating voltage	60 VDC
Max. operating current	0.3A
Max. switching capacity	10W
Min. permissible load (ref. value)	0.1 VDC 100μA

CHARACTERISTIC DATA

Max. switching capacity

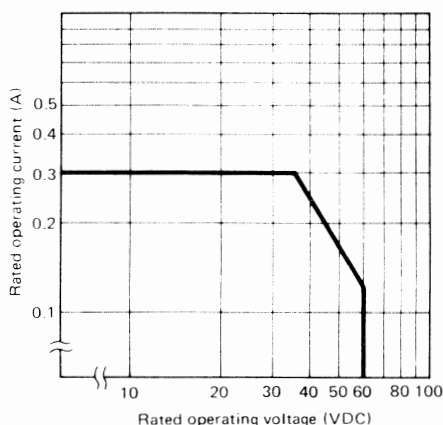


CHARACTERISTICS

Contact resistance	50mΩ max.
Stray capacitance	2pF max. between contacts of same poles 5pF max. between coil or ground terminal and contact 10pF max. between ground terminal and coil terminals
Thermoelectromotive force	5μV max. (when the rated voltage is applied to the coil at an ambient temperature of 20°C)
Operate time	7msec max.
Release time	3msec max.
Max. operating frequency	Mechanically: 36,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	500 VAC, 50/60Hz for 1 minute (250 VAC between contacts of same pole)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 150m/sec ² (approx. 15G's)
Ambient operating temperature	Operating: -25 to +70°C
Humidity	45 to 85% RH
Service life	Mechanically: 50,000,000 operations min. (at operating frequency of 36,000 operations/hour) Electrically: _____
Weight	Approx. 3.5g


NOTE: The data shown above are of initial value.

DIMENSIONS

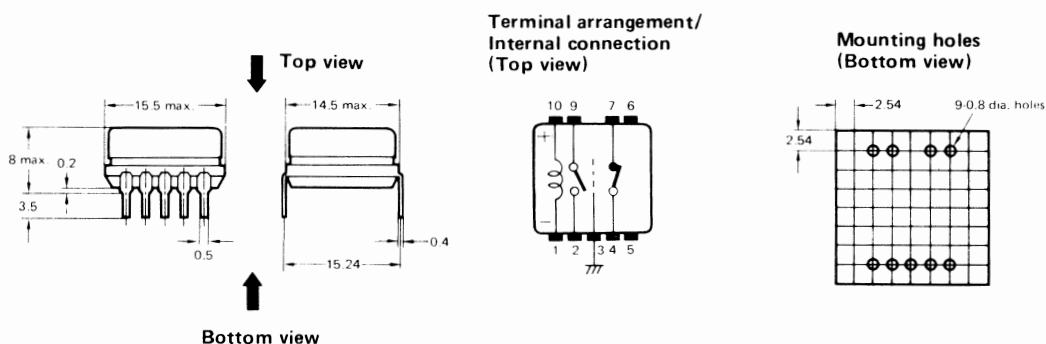

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.



How to Solder Sealed Type PC Relays

Soldering


Since the PC relay is of perfectly sealed construction, no problem should arise from automatic soldering or cleaning with the PC relay mounted on a PC board. However, please pay attention to the following points.

- (1) Use an anti-corrosive rosin type flux.
- (2) For flux solvent, use alcohol type which is less chemically reactive.
- (3) When preheating the PC board after flux application, keep the temperature of the land side of the PC board to less than 80°C.
- (4) Dip the bottom of the PC board into molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- (5) Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37 eutectic solder) JIS Z 3282.
- (6) Use freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.

DIP Type Latching Relay for Power-saving Driving

FEATURES

- Highly efficient permanent magnet incorporated in the dual coil type latching relay permits direct drive by IC or TTL circuit.
- Employs magnetic shielding case.
- Excellent resistance to vibration and shock.
- Hermetically sealed construction.
- Thermoelectromotive force of $5\mu\text{V}$ permits stable signal transmission.

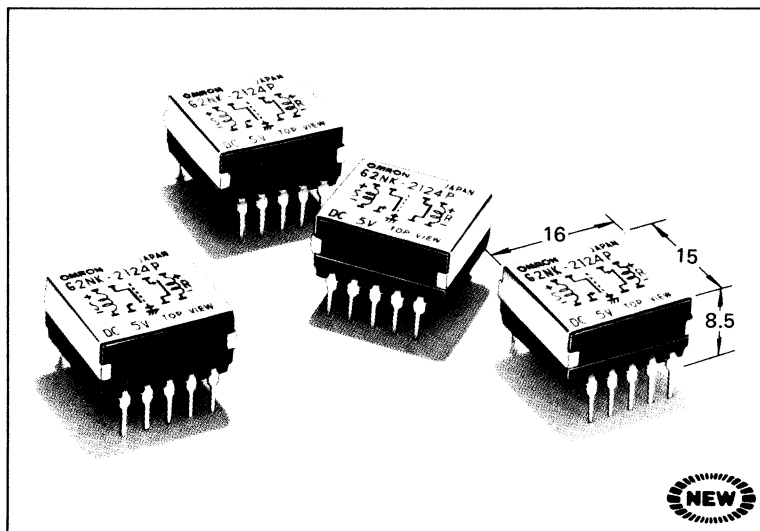

AVAILABLE TYPES

Type	General purpose
Contact form	
SPST-NO+SPST-NC	G2NK-2124P

OMRON

SPECIFICATIONS

COIL RATINGS


<div><div>Item</div><div>Rated voltage</div></div>	Set coil			Reset coil			Must set voltage	Must reset voltage	Maximum voltage	Power consumption	
	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)				Set coil (mW)	Reset coil (mW)
							% of rated voltage				
3 VDC	66.7	45	0.018	66.7	45	0.019	80 max.	80 max.	110	200	200
5 VDC	40	125	0.05	40	125	0.047				250	250
12 VDC	20.8	576	0.17	20.8	576	0.18				250	250
24 VDC	10.4	2,304	0.79	10.4	2,304	0.80				250	250

CONTACT RATINGS

Item	Load	Resistive load (p.f.=1)
Rated load	24 VDC 0.3A	
Carry current	0.3A	
Max. operating voltage	60 VDC	
Max. operating current	0.3A	
Max. switching capacity	10W	
Min. permissible load (ref. value)	0.1 VDC 100 μ A	

CHARACTERISTIC DATA

Max. switching capacity

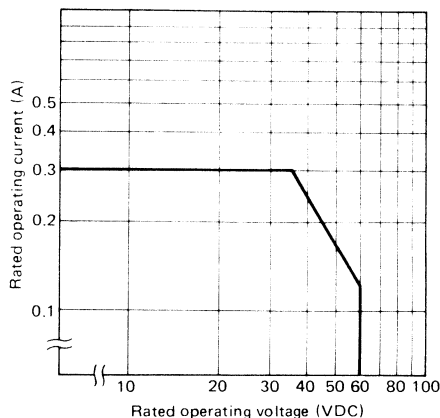


CHARACTERISTICS

Contact resistance	100mΩ max.
Stray capacitance	2pF max. between contacts of same poles 5pF max. between coil or ground terminal and contact 5pF max. between ground terminal and coil terminal
Thermoelectromotive force	3μV max. (when the rated voltage is applied to the coil at an ambient temperature of 20°C.)
Operate time	7msec max. (Pulse width: 10msec min.)
Release time	
Max. operating frequency	Mechanically: 36,000 operations/hour; Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	500 VAC, 50/60Hz for 1 minute 250 VAC, 50/60Hz for 1 minute between contacts of same pole 100 VAC, 50/60Hz for 1 minute between set and reset coils
Vibration	Mechanical and malfunction durability: 10 to 55Hz; 1.5mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 250m/sec ² (approx. 25G's)
Ambient temperature	Operating: -25 to +70°C
Humidity	45 to 85% RH
Service life	Mechanically: 50,000,000 operations min. (at operating frequency of 36,000 operations/hour) Electrically: _____
Weight	Approx. 4.0g


NOTE: The data shown above are of initial value.

DIMENSIONS

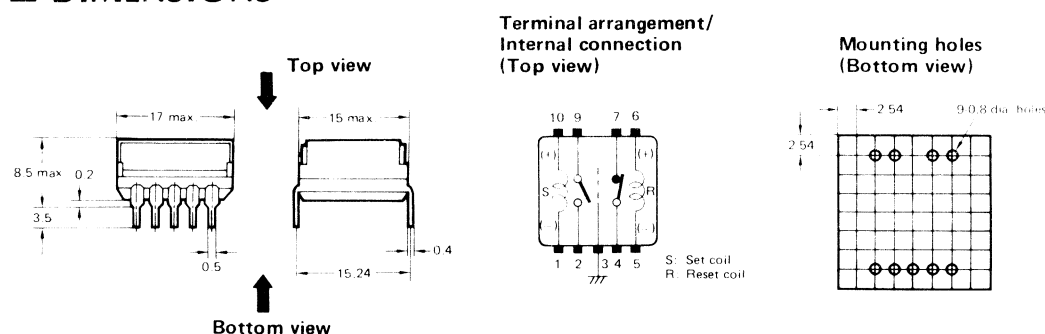

HINTS ON CORRECT USE

- When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown in the figure below.



- Both the set and reset coils may be energized continuously. However, do not apply voltage simultaneously to both coils.
- If the relays are used in any of the circuits shown at the right, the relay contacts may be released from their locked (energized/deenergized) positions. To prevent this, either connect diodes D1 and D2 or change the circuit configuration.

Hints on circuit connection

Circuit with two reset coils parallelly connected to one another <p>(D1, D2: Diodes to prevent relay from malfunctioning)</p>	Circuit with two set coils parallelly connected to one another <p>(D: Diodes to prevent relay from malfunctioning)</p>
Circuit with two set coils and two reset coils connected <p>(D1, D2: Diodes to prevent relay from malfunctioning)</p>	Circuit with set coil parallelly connected to other relay <p>(D: Diode for no-voltage absorber)</p>

- When connecting diodes to the circuit, use diodes which have repetitive peak-inverse voltage and DC reverse voltage sufficient to absorb external noise or surges, and whose average rectifying current is greater than the coil current.

Since voltage drop by the diodes will occur, use diodes of which the forward voltage is as low as possible or increase the supply voltage to compensate for the voltage drop.

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

OMRON PC BOARD-USE RELAY


Cat No. K09-E1-2

Model **G2T**

**High-sensitivity (230mW max.)
DIP Type Relay for Signal Control**

FEATURES

- Perfectly sealed package construction.
- Bifurcated contact construction employing gold alloy assures high reliability at low signal levels, and is ideal for input in IC or transistor circuits.
- Short contact bounce time (approx. 20μsec).
- Shield plate prevents contacts from being affected adversely by noise generated by coil.
- High shock and vibration resistance is assured by the balanced armature system.
- Thermoelectromotive force as low as 3μV max., ideal for analog signals.
- Conforms to UL, CSA and VDE.

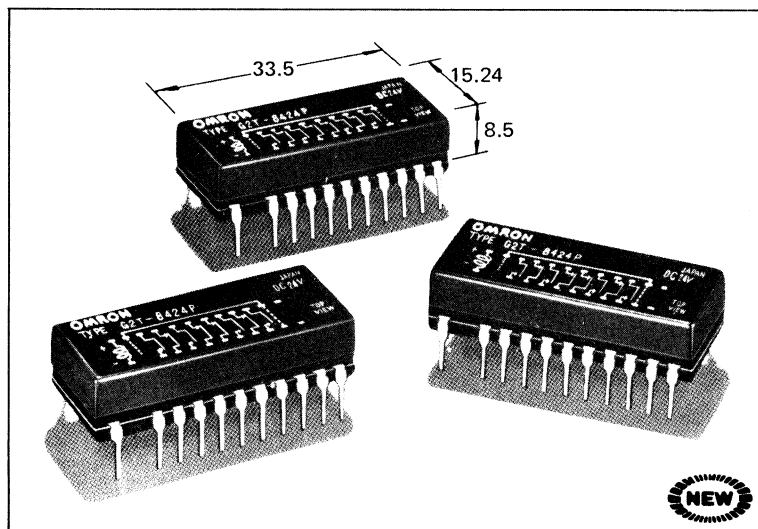

AVAILABLE TYPES

Type	General purpose
Contact form	
4PST-NO + 4PST-NC	G2T-8424P

OMRON

SPECIFICATIONS

COIL RATINGS

Item Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3 VDC	120	25	0.053	0.079	80 max.	10 min.	110	Approx. 360
5 VDC	72	69	0.139	0.209				
12 VDC	30	400	0.788	1.183				
24 VDC	15	1,600	3.250	4.870				


NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of ±10%.

CONTACT RATINGS

Item	Load	Resistive load (p.f.=1)
Rated load	24 VDC 0.3A	
Carry current	0.3A	
Max. operating voltage	60 VDC	
Max. operating current	0.3A	
Max. switching capacity	10W	
Min. permissible load (ref. value)	0.1 VDC 100μA	

CHARACTERISTIC DATA

Max. switching capacity




CHARACTERISTICS

Contact resistance	100m Ω
Stray capacitance*	1(2)pF max. between contacts of same pole. 1(2)pF max. between other terminals. 1(3)pF max. between coil and contact.
Thermoelectromotive force	3 μ V (with rated voltage applied at ambient temperature of 20°C)
Operate time	10msec max.
Release time	5msec max.
Operating frequency	Mechanically: 36,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100M Ω min. (at 250 VDC)
Dielectric strength	1,000 VAC, 50/60Hz for 1 minute (250 VAC between contacts of same pole)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 200m/sec ² (approx. 20G's)
Ambient temperature	Operating: -25 to +70°C
Humidity	45 to 85% RH
Service life	Mechanically: 50,000,000 operations min. (at operating frequency of 36,000 operations/hour) Electrically: —
Weight	Approx. 8.7g


NOTES: 1. The data shown above are of initial value.
2. * Values in parentheses are those when the ground terminal is not connected.

DIMENSIONS

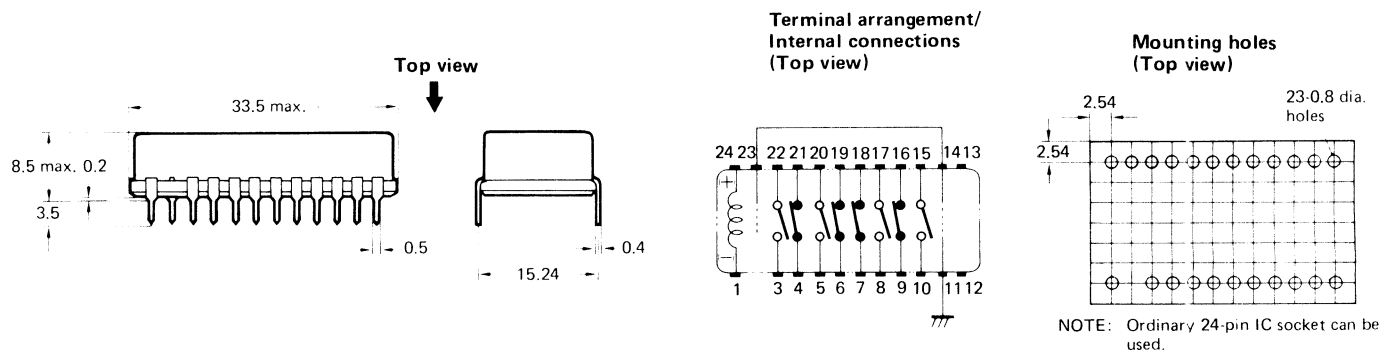

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

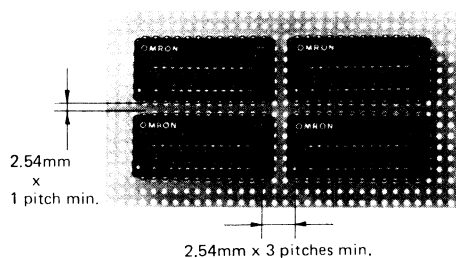

How to Solder Sealed Type PC Relays

Soldering

Since the PC relay is of perfectly sealed construction, no problem should arise from automatic soldering or cleaning with the PC relay mounted on a PC board. However, please pay attention to the following points.

- (1) Use an anti-corrosive rosin type flux.
- (2) For flux solvent, use alcohol type which is less chemically reactive.
- (3) When preheating the PC board after flux application, keep the temperature of the land side of the PC board to less than 80°C.
- (4) Dip the bottom of the PC board into molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- (5) Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37 eutectic solder) JIS Z 3282.
- (6) Use freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


OMRON PC BOARD-USE RELAY

Cat. No. K10-E1-2

Model **G2P**

DIP Type Relay for Power Drive With 3A, 250VAC Switching Capacity

- Sealed and 8mm thick.
- High dielectric strength (2,000 VAC).
- Gold-clad silver contacts with high contact reliability assure stable switching of a wide range of loads from micro current/voltage to 3A loads.
- Conforms to UL, CSA, VDE and SEV.

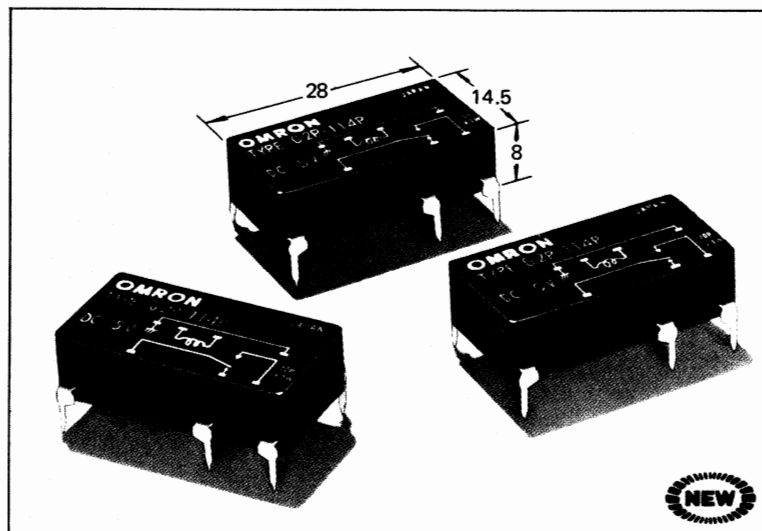

AVAILABLE TYPES

Contact form	Type	General purpose
SPDT		G2P-114P

SPECIFICATIONS

COIL RATINGS

Item Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
5 VDC	48	104	0.27	0.30	80 max.	10 min.	120	Approx. 240
6 VDC	40	150	0.44	0.49				
12 VDC	20	600	1.6	1.9				
24 VDC	10	2,400	6.0	7.2				


NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of ±10%.

CONTACT RATINGS

Item	Load	Resistive load (p.f.=1)	
		SPST-NO	SPST-NC
Rated load		110 VAC 3A 220 VAC 1.5A 24 VDC 2A	110 VAC 1A 220 VAC 0.5A 24 VDC 1A
Carry current		3A	
Max. operating voltage		250 VAC, 60 VDC	
Max. operating current		3A	1A
Max. switching capacity		330VA, 60W	110VA, 30W
Min. permissible load (reference value)		5 VDC 10mA	

CHARACTERISTIC DATA

Max. switching capacity




CHARACTERISTICS

Contact resistance	100mΩ max.
Stray capacitance	20pF max. between coil and ground terminal. 2pF max. between other terminals.
Operate time	10msec max.
Release time	
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	2,000 VAC, 50/60Hz for 1 minute (1,000 VAC between coil and ground terminal, 750 VAC between contacts of same pole)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.0mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -25 to +55°C
Humidity	45 to 85% RH
Service life	Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: —
Weight	Approx. 6g


NOTE: The data shown above are of initial value.

DIMENSIONS

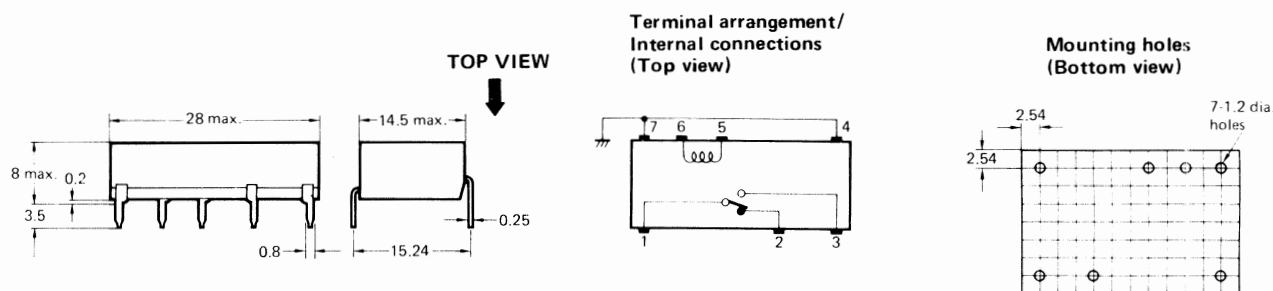

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

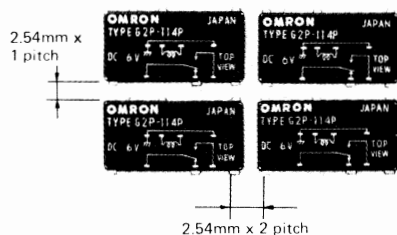

How to Solder Sealed Type PC Relays

Soldering

Since the PC relay is of perfectly sealed construction, no problem should arise from automatic soldering or cleaning with the PC relay mounted on a PC board. However, please pay attention to the following points.


- (1) Use an anti-corrosive rosin type flux.
- (2) For flux solvent, use alcohol type which is less chemically reactive.
- (3) When preheating the PC board after flux application, keep the temperature of the land side of the PC board to less than 80°C.
- (4) Dip the bottom of the PC board into molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- (5) Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37 eutectic solder) JIS Z 3282.
- (6) Use freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

Sugar Cube-Sized PCB Relay Capable of Switching 5A Loads

FEATURES

- Ideal for application in household electrical appliances.
- Construction resistant to flux wicking.
- Sealed type available.

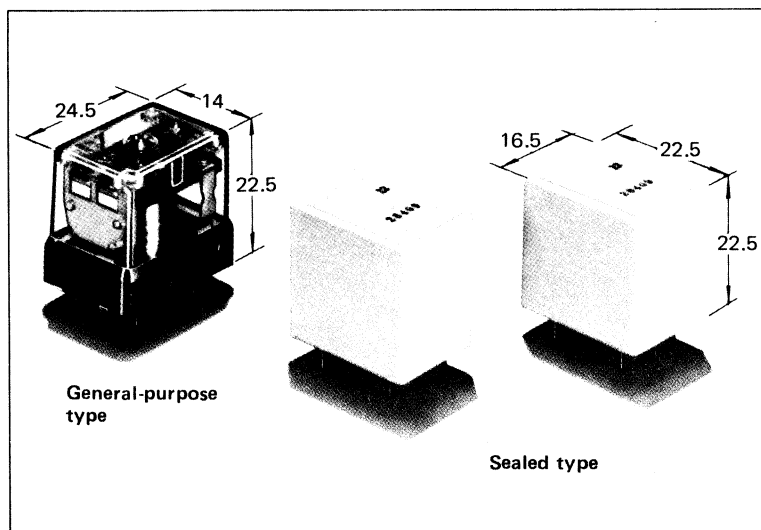

AVAILABLE TYPES

Classification	Type	General purpose	Sealed
	Contact form		
Standard type	SPDT	G2U-112P	G2U-114P
	SPST-NO	G2U-112P-100	—
Standard approved type	SPDT	G2U-112P-US	—
	SPST-NO	G2U-112P-100-US	—

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Item Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
6 VDC	60	100	0.34	0.51	75 max.	10 min.	130 max.	Approx. 360
12 VDC	30	400	1.2	2.3				
24 VDC	15	1,600	4.8	8.0				

NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of ±10%.


CONTACT RATINGS

(Value in parentheses applies to sealed type.)


Item	Resistive load (p.f.=1)	Inductive load (p.f.=0.4; L/R=7msec)
Rated load	110 VAC/24 VDC 5A (3A)	110 VAC/24 VDC 2.5A (1.5A)
Carry current	5A (3A)	
Max. operating voltage	125 VAC, 60 VDC	
Max. operating current	5A (3A)	3A (1.5A)
Max. switching capacity	600VA/150W (350VA/90W)	300VA/70W (180VA/40W)
Min. permissible load (reference value)	5 VDC 100mA	

CHARACTERISTIC DATA

Max. switching capacity



Electrical service life



CHARACTERISTICS

Contact resistance	100mΩ max.
Operate time	15msec max.
Release time	5msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	1,500 VAC, 50/60Hz for 1 minute (750 VAC between non-continuous contacts)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -20 to 60°C
Humidity	45 to 85% RH
Service life	Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 13g


NOTE: The data shown are of initial value.

DIMENSIONS



G2U-112P(-US), G2U-112P-100(-US)

Terminal layout/
Internal connections
(Bottom view)

Mounting holes
(Bottom view)

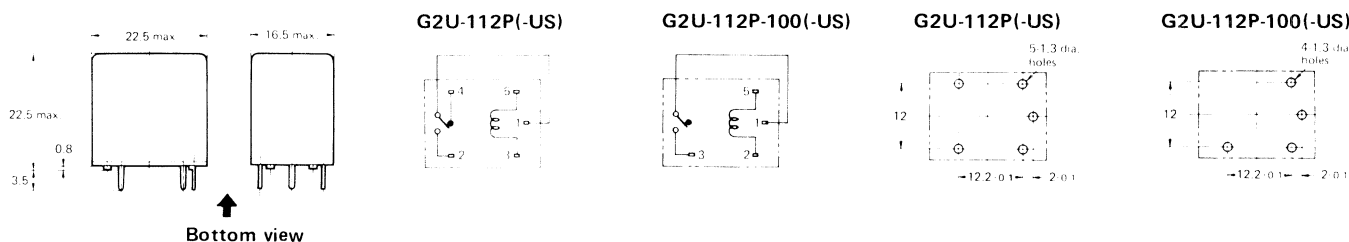


G2U-114P

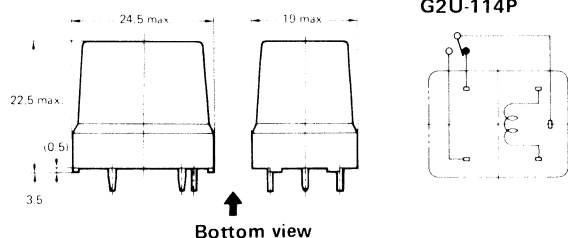

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

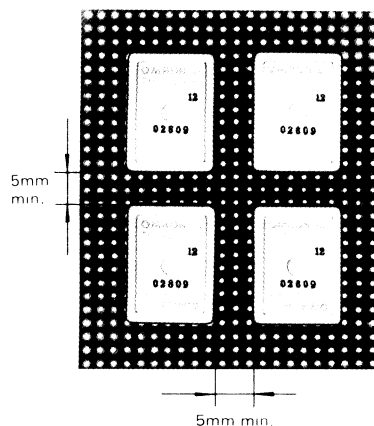

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)

	Type	Contact form	Coil ratings	Contact ratings
General purpose	G2U-112P-US	SPDT	5 to 24 VDC	5A 120 VAC or 5A 28 VDC (resistive load) 3A 120 VAC (inductive load)
	G2U-112P-100-US	SPST-NO		

CSA certified type (File No. LR34815)

	Type	Contact form	Coil ratings	Contact ratings
General purpose	G2U-112P-US	SPDT	5 to 24 VDC	3A 120 VAC (resistive load) 3A 28 VDC (resistive load) 1.5A 120 VAC (inductive load)
	G2U-112P-100-US	SPST-NO		

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


Power Output Relay for Power Switching in Printed Circuits

FEATURES

- Creepage distance of 8mm min. between coil and contact fully meets VDE C/250 and dielectric strength of 4,000 VAC min. conforms to UL, CSA and IEC Class II.
- TV rated (TV-5).
- Special terminal board construction preventing the ingress of solder flux inside the relay.
- International 2.54mm terminal pitch.
In addition, N.O. contact type has a terminal pitch of 15.24mm, while SPDT contact type has a pitch of 7.62mm.
- High impulse voltage resistance (10,000V min. between coil and contact).

AVAILABLE TYPES

Type		Vertical mounting
Classification	Contact form	
Standard type	SPDT	G2W-112P-V
	SPST—NO	G2W-1112P-V
Standard approved type	SPDT	G2W-112P-V-US ㉟
	SPST—NO	G2W-1112P-V-US ㉟

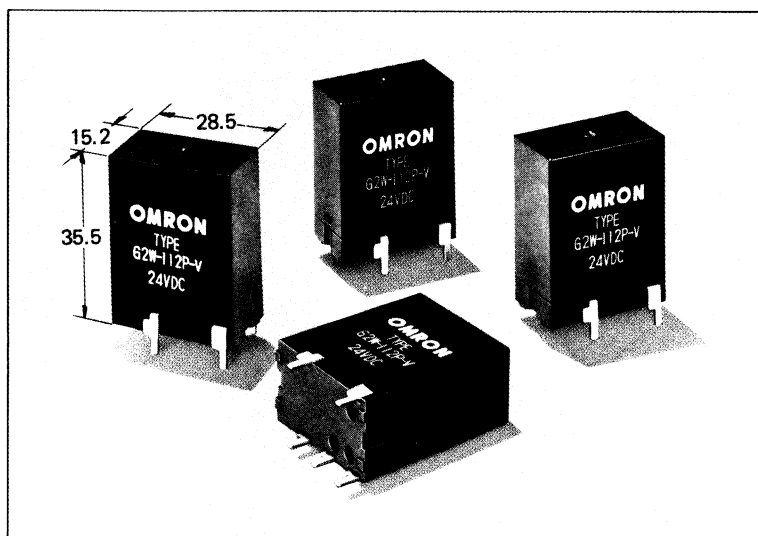

STANDARD TYPE

OMRON

SPECIFICATIONS

COIL RATINGS

Rated voltage (V)		Rated current (mA)		Coil resist- ance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maxi- mum voltage	Power consump- tion (VA, W)
					Arma- ture OFF	Arma- ture ON				
		% of rated voltage								
AC	6	252	216	—	0.03	0.06	80 max.	30 min.	110	Approx. 1.3
	12	126	108		0.14	0.28				
	24	63	54		0.5	1.1				
	50	30.4	26		2.3	4.5				
	100	15.2	13		9	19				
	110	—	11.8		10.2	21.4				
	120	—	10.8		12.3	27.4				
	200	7.6	6.5		27.3	72.4				
	220	—	5.9		27.8	88.9				
240	—	5.4	44.3	103.5						
DC	6	166.7		36	0.04	0.042		10 min.		Approx. 1
	12	83.3		144	0.2	0.21				
	24	41.7		576	0.84	0.85				
	48	20.9		2,300	3.5	3.6				
	100	10		10,000	20.8	21.8				


NOTE: The rated current, coil resistance and inductance are measured at a coil temperature of 20°C with tolerances of +15%, -20% for AC rated current and ±15% for DC rated current, and ±15% for rated coil resistance.

CHARACTERISTIC DATA


Electrical service life

G2W-112P-V (AC/DC coil), G2W-1112P-V (AC coil)

AC load




DC load




G2W-1112P-V (DC coil)

AC load



DC load



CONTACT RATINGS

Item	Load	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Rated load	220 VAC 10A 24 VDC 10A	220 VAC 7.5A 24 VDC 5A
Carry current	10A	
Max. operating voltage	250 VAC 125 VDC	
Max. operating current	10A	AC: 7.5A DC: 5A
Max. switching capacity	2,200VA 240W	1,650VA 120W
Minimum permissible load (ref. value)	5V 100mA	


CHARACTERISTICS

Contact resistance	30mΩ max.
Operate time	20msec max.
Release time	20msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	SPST-NO type: 4,000 VAC, 50/60Hz for 1 min. (1,000 VAC between non-continuous contacts) SPDT type: 2,000 VAC, 50/60Hz for 1 min.
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude (10 to 55Hz; 0.5mm double amplitude for N.C. contact type)
Shock	Mechanical durability: 1,000m/s ² (approx. 100G's) Malfunction durability: 200m/s ² (approx. 20G's) [50m/s ² (approx. 5G's) for N.C. contact type]
Ambient temperature	Operating: -25 to 55°C
Humidity	45 to 85% RH
Service life	Mechanically: 5,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 20g


NOTE: The data shown are of initial value.

DIMENSIONS


G2W-112P-V

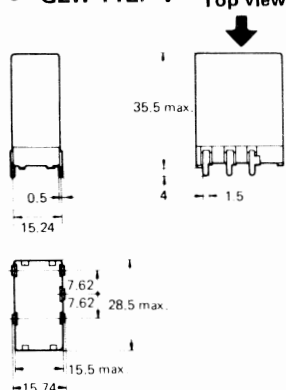


Terminal arrangement/ internal connections (Top view)



G2W-1112P-V

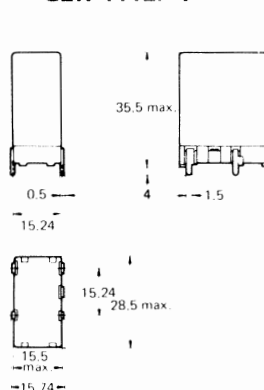


Terminal arrangement/ internal connections (Top view)



HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

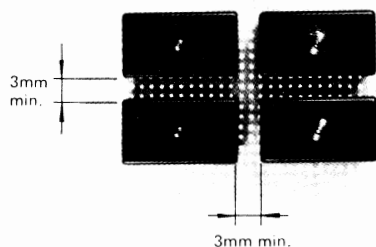

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)/CSA certified type (File No. LR31928-21)

Type	Contact form	Coil ratings	Contact ratings
G2W-112P-V-US ⑤	SPDT	6 to 200 VAC 6 to 100 VDC	10A 250 VAC (inductive load) 10A 24 VDC (resistive load) TV-5
G2W-1112P-V-US ⑤	SPST-NO		

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


Audio Equipment Protective Relay Ideal for Protection of Amplifiers, Speakers, Muting Circuits

FEATURES

- Creepage distance of 3.2mm min. conforms to CEE Pub. 1 (IEC Pub. 65), CEE Pub. 24 and UL 1270.
- High dielectric strength (2,000 VAC min.).
- International 2.54mm terminal pitch. In addition, a minimum pitch of 5.08mm is provided between terminals.

AVAILABLE TYPES

Type	General purpose
Contact form	
DPST—NO	G2Z-222P-US

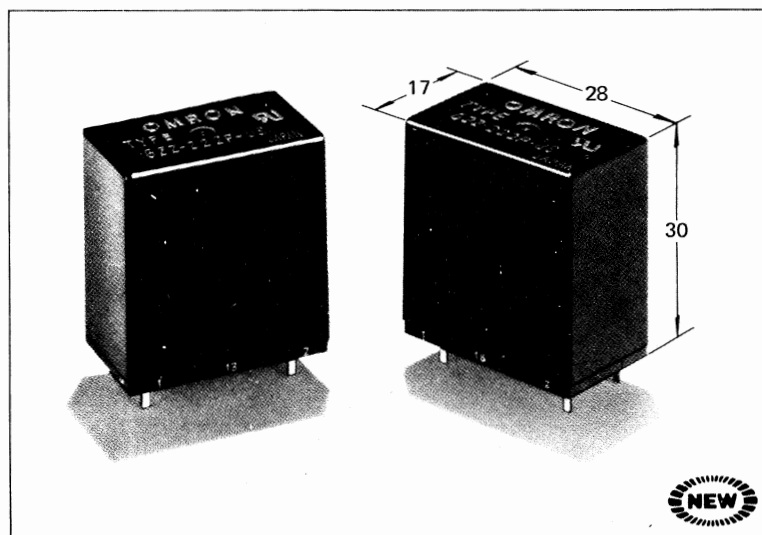

OMRON

SPECIFICATIONS

COIL RATINGS

Item Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
					% of rated voltage			
6 VDC	105	57	0.18	0.3	80 max.	10 min.	110 max.	Approx. 630
12 VDC	52	233	0.89	1.28				
24 VDC	26	914	3.24	4.71				
48 VDC	13	3.660	12.1	17.6				

NOTE: The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of ±10%.

CONTACT RATINGS


Item	Load	Resistive load (p.f.=1)
Rated load		40VA 5A
Carry current		5A
Max. operating voltage		120 VAC
Max. operating current		5A
Max. switching capacity		200VA, 120W
Min. permissible load		1 VDC 100μA (ref. value)

CHARACTERISTICS

Contact resistance	50mΩ max.
Operate time	20msec max.
Release time	20msec max.
Operating frequency	Mechanically: 18,000 operations/hour Under rated load: 1,800 operations/hour
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	2,000 VAC, 50/60Hz for 1 minute (1,500 VAC, 50/60Hz for 1 minute between contacts)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.0mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -10 to +40°C (without frost formation)
Humidity	45 to 85% RH
Service life	Mechanically: 100,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: —
Weight	Approx. 20g


NOTE: The data shown above are of initial value.

■ DIMENSIONS

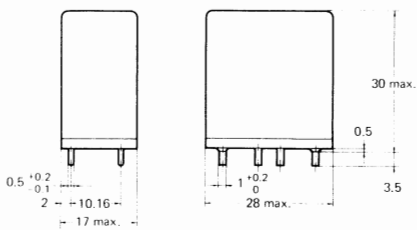


Bottom view

**Terminal arrangement/
Internal connections
(Bottom view)**



NOTE: Pay attention to the polarity of the coil.

**Mounting holes
(Bottom view)**



- RATINGS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings
G2Z-222P-US	SPDT	6 to 48 VDC	3A 120 VAC or 5A 40 VAC (inductive load) TV-1


CSA certified type (File No. LR31928)

Type	Contact form	Coil ratings	Contact ratings
G2Z-222P-US	SPDT	6 to 48 VDC	5A 24 VDC (resistive load) 3A 120 VAC or 5A 40 VAC (inductive load)

• How to Solder Unsealed Type PC Relays

- **Manual Soldering**

It is recommended that the PC relay be manually soldered after automatic soldering of other components to protect the relay contacts from excessive flux. When soldering, apply a soldering iron rated at 30 to 60W (tip temperature: 280 to 300°C) quickly (within 3sec) and firmly. Then, be sure to confirm that the relay operates normally. Process the PC board beforehand as shown below to prevent the relay mounting holes from being filled with solder and to facilitate subsequent manual soldering.

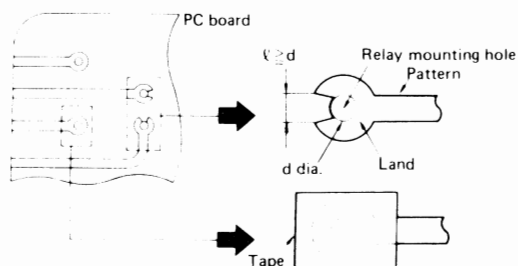

- Automatic flow soldering

1) Flux application

- a. Apply flux sparingly and evenly to prevent penetration of solder flux into the relay. In this case, adjust the position of flux level so that the upper surface of the PC board is not flooded with flux.

- b. Use an anti-corrosive rosin type flux.
- c. For flux solvent, use alcohol type which is less chemically reactive.
- d. Preheating process subsequent to flux application is effective to dry the applied flux, facilitate metal melting and prevent penetration of flux into the relay. However, when preheating the PC board, keep the temperature of the land side of the PC board to less than 80°C.

2) Soldering

- Move the bottom of the PC board over a flowing wave of molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37) JIS Z 3282.

3) Cooling

Cool forcibly the PC board with fan, etc.

4) Cleaning

As much as possible, avoid cleaning the terminals. When cleaning for some reason or other, care should be taken to the following:


- Use alcohol or freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.
- Clean the soldered PC board pattern side only to prevent the flux-contaminated solvent from entering the relay.

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

High Impulse Withstand Voltage (7KV) – Ideal for Applications Requiring Resistance to Voltage Surges

FEATURES

- Distance of 7.5mm min. between coil and contact terminals permits flexible pattern design.
- Contact section located opposite the terminal section provides a greater creepage distance and prevents solder flux wicking, thus facilitating automatic flow soldering.
- Micro voltage/current load type employs highly reliable gold-silver alloy with crossbar construction to switch wide-ranging loads from dry circuits of several mA to 1A.

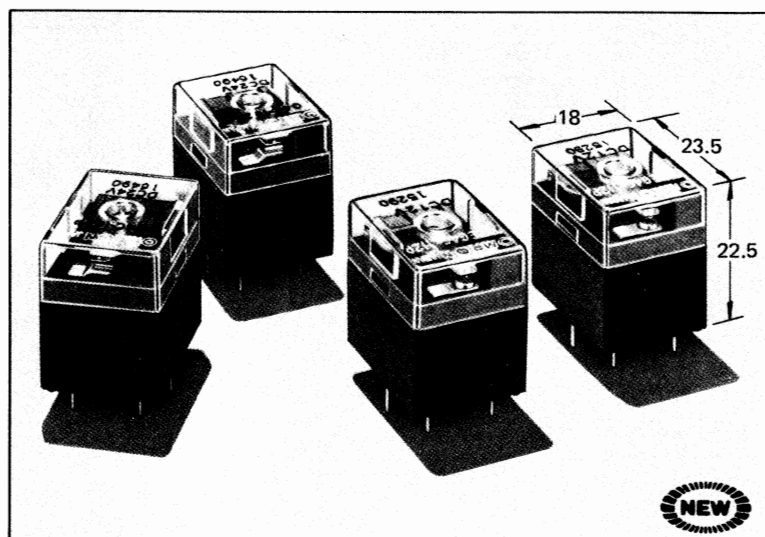

AVAILABLE TYPES

Classification		Type Contact form	Micro voltage/ current load	High capacity
Standard type		SPDT	G4C-182P	G4C-112P-E
Standard approved type	UL, CSA		G4C-182P-US	G4C-112P-E-US (TV-2)
	VDE, SEV		—	G4C-112P-E-VD

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Item Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
6 VDC	60	100	0.31	0.49	80 max.	10 min.	130	Approx. 360
12 VDC	30	400	1.27	1.83				
24 VDC	15	1,600	5.97	8.16				


NOTES: 1. The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of ±10%.
2. The performance characteristics are measured at a coil temperature of 20°C.

CONTACT RATINGS


Type	Micro voltage/current load		High capacity	
Load	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Item				
Rated load	110 VAC 1A 24 VDC 1A	110 VAC 0.5A 24 VDC 0.5A	110 VAC 5A 24 VDC 5A 220 VAC 3A	110 VAC 2A 24 VDC 2A
Carry current	2A		5A	
Max. operating voltage	250 VAC, 60 VDC		250 VAC, 60 VDC	
Max. operating current	1A		5A	3A
Max. switching capacity	120VA, 30W	60VA, 15W	750VA, 150W	220VA, 48W
Min. permissible load (reference value)	5 VDC 1mA		5 VDC 100mA	

CHARACTERISTIC DATA

Maximum switching capacity G4C-112P-E



Electrical service life G4C-112P-E




CHARACTERISTICS


Item	Type	G4C-182P (-US)	G4C-112P-E (-US, -VD)
Contact resistance		50mΩ max.	100mΩ max.
Operate time		15msec max.	
Release time		5msec max.	
Operating frequency		Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)	
Insulation resistance		100MΩ min. (at 500 VDC)	
Dielectric strength		2,000 VAC, 50/60Hz for 1 minute (750 VAC between contacts of same pole)	
Vibration		Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude	
Shock		Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)	
Ambient temperature		Operating: -25 to +60°C	
Humidity		45 to 85% RH	
Service life		Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."	
Weight		Approx. 15g	

NOTE: The data shown above are of initial value.


DIMENSIONS

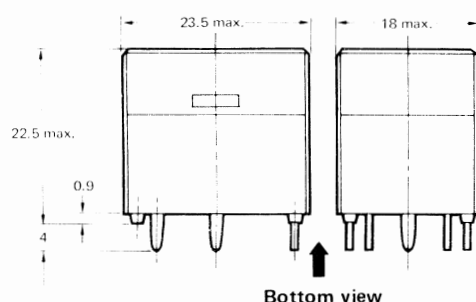

Terminal arrangement/
Internal connections
(Bottom view)




Mounting holes
(Bottom view)

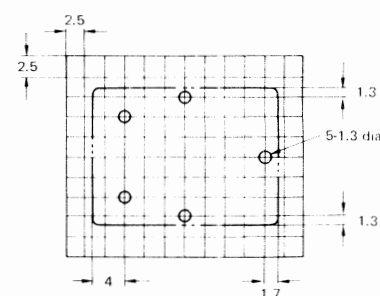

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

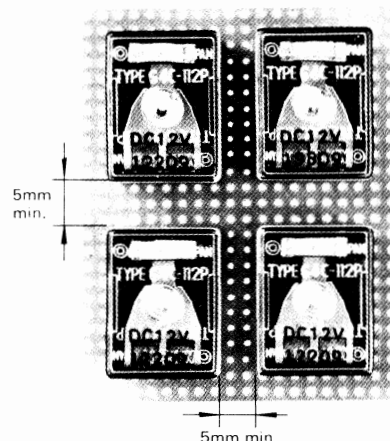

STANDARD APPROVED TYPE

SPECIFICATIONS

Same as the Standard Type with the following exceptions.

RATINGS

UL recognized type (File No. E41515)/CSA certified type (File No. LR-34815)

Type	Contact form	Coil ratings	Contact ratings
G4C-182P-US	SPDT	6 to 24 VDC	0.5A 120 VAC (resistive load) 1A 120 VAC (resistive load) 1A 28 VDC (resistive load)
G4C-112P-E-US-TV2			3A 120 VAC (resistive load) 5A 120 VAC (resistive load) 5A 28 VDC (resistive load) TV-2 (TV ratings)

VDE approved type (File No. 58613913)

Type	Contact form	Coil ratings	Contact ratings
G4C-112P-E-VD	SPDT	6 to 24 VDC	3A 250 VAC (resistive load) 1.5A 250 VAC (inductive load)

SEV listed type (File No. D7.91/371)


Type	Contact form	Coil ratings	Contact ratings
G4C-112P-E-VD	SPDT	6 to 24 VDC	3A 250 VAC (resistive load) 5A 28 VDC (resistive load)

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

Double-pole Relay That Breaks 5A Loads

FEATURES

- Creepage distance of more than 3mm.
- International 2.54mm terminal pitch arrangement.
- Contact section arranged at the upper part of the relay housing with unique terminal construction to seat the relay enclosure base 1mm above the PC board surface, facilitates automatic flow soldering.

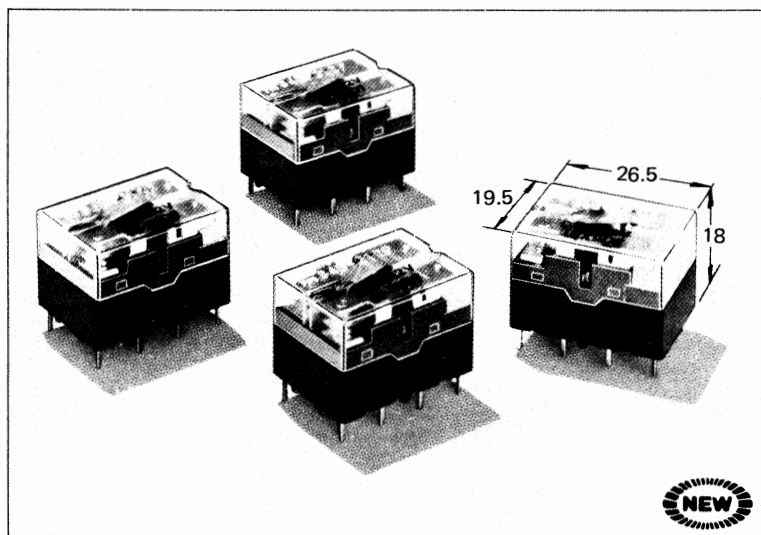

AVAILABLE TYPES

Type	High capacity, AgCdO single contact	Standard approved
Contact form		
DPDT	G4D-212P	G4D-212P-US-TV2

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Item Rated voltage	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
5 VDC	160.3	31.2	0.114	0.215	80 max.	15 min.	110	800
6 VDC	133.3	45	0.185	0.284				
12 VDC	66.7	180	0.713	1.200				
24 VDC	33.3	720	2.140	3.570				

NOTES: 1. The rated current and coil resistance are measured at a coil temperature of 20°C with tolerances of $\pm 10\%$.


2. The performance characteristics are measured at a coil temperature of 20°C ± 5 .

CONTACT RATINGS


Item	Load	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Rated load	110 VAC 5A 24 VDC 5A	110 VAC 2.5A 24 VDC 2.5A
Carry current	5A	
Max. operating voltage	250 VAC, 125 VDC	
Max. operating current	5A	
Max. switching capacity	AC	1,100VA
	DC	120W
Min. permissible load (reference value)	5 VDC 100mA	

CHARACTERISTIC DATA

Max. switching capacity

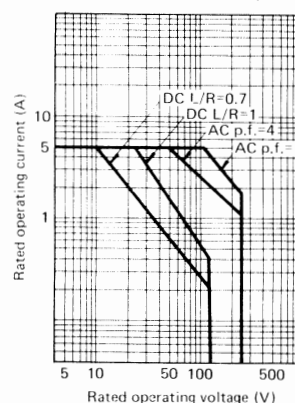

Electrical service life

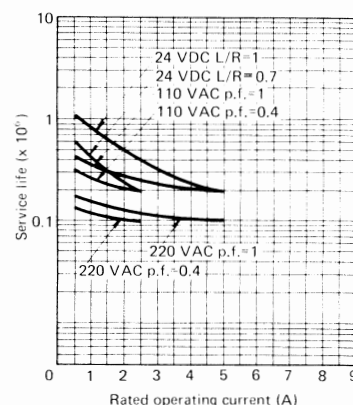


CHARACTERISTICS

Contact resistance	50mΩ max.
Operate time	20msec max.
Release time	10msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	2,000 VAC 50/60Hz for 1 minute (1,000 VAC between contacts)
Vibration	Mechanical and malfunction durability: 10 to 55Hz; 1.5mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -20 to +60° C
Humidity	45 to 85% RH
Service life	Mechanically: 10,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 21g


NOTE: The data shown above are of initial value.

DIMENSIONS

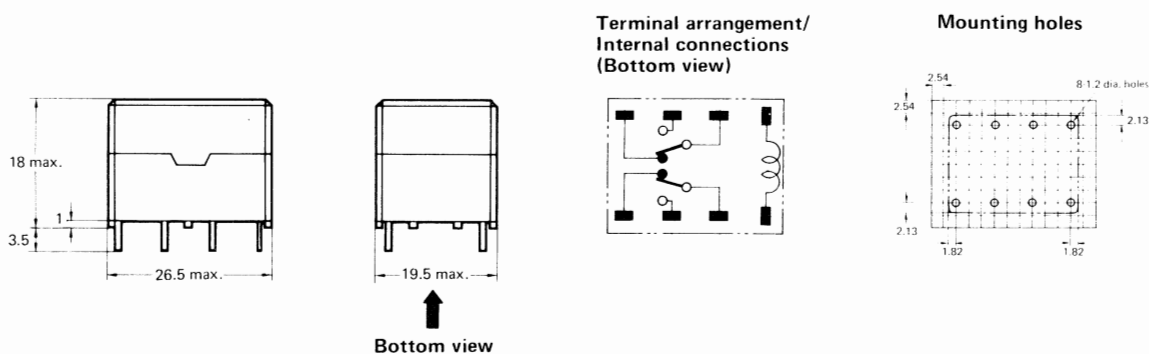

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

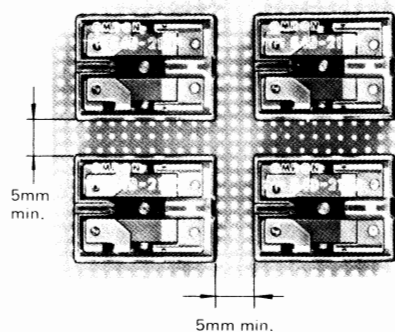

STANDARD APPROVED TYPE

SPECIFICATIONS

Same as the Standard Type with the following exceptions.

RATINGS


UL recognized type (File No. E41515)/CSA certified type (File No. LR34815)

Type	Contact form	Coil ratings	Contact ratings
G4D-212P-US-TV2	DPDT	5 to 24 VDC	5A 250 VAC, 5A 28 VDC (resistive load) TV-2

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


In addition to the products featured in this catalog, OMRON offers a broad line of other quality control components and devices. Below are general listings of other OMRON product lines. Let OMRON satisfy your design and production requirements.

SWITCHES

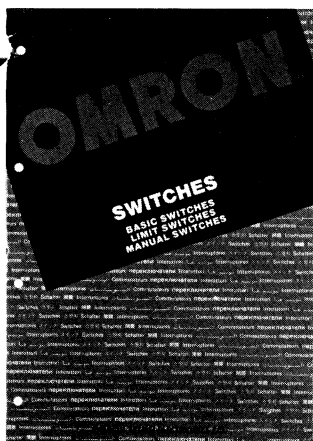

(Cat. No. X10-E1)

TIMERS

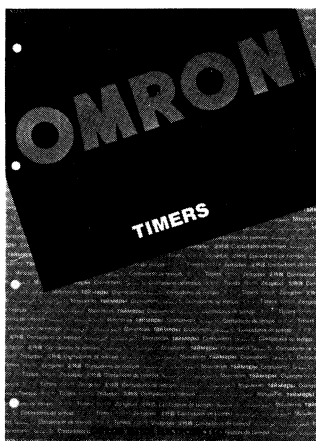


(Cat. No. X12-E1)

COUNTERS




(Cat. No. X13-E1)

PROXIMITY SWITCHES

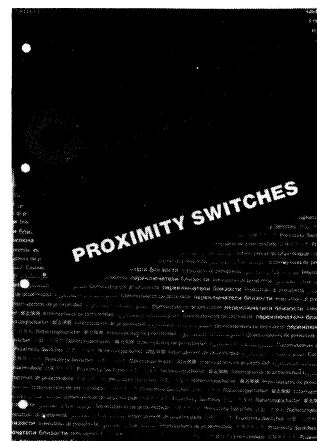


(Cat. No. X14-E1)

PHOTOELECTRIC SWITCHES

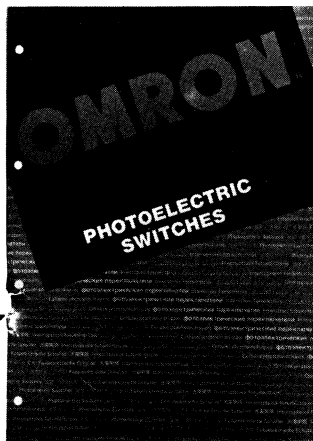

(Cat. No. X15-E1)

LEVEL SWITCHES

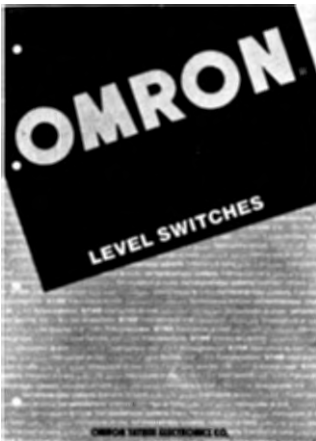


(Cat. No. X16-E1)

TEMPERATURE CONTROLLERS




(Cat. No. X17-E1)

SOLID-STATE RELAY SERIES

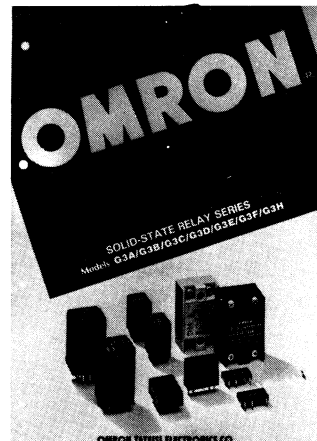


(Cat. No. X30-E1)

THUMBWHEEL SWITCH SERIES

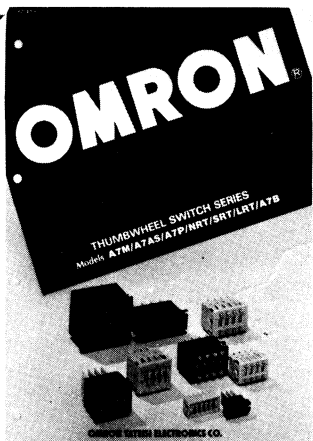


(Cat. No. X31-E1)

ILLUMINATED PUSHBUTTON SWITCH SERIES

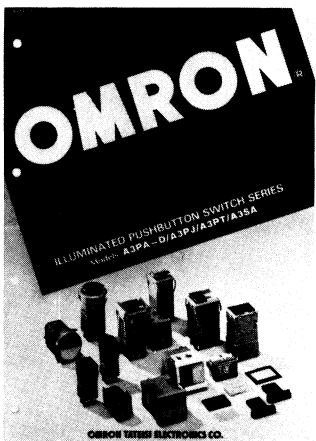

(Cat. No. X32-E1)

PHOTO MICROSENSOR SERIES

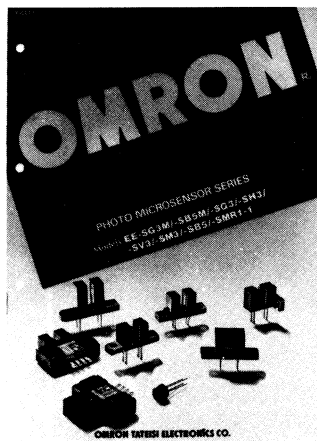

(Cat. No. X36-E1)

All the catalogs shown above may not be readily obtainable in some areas.

OMRON





OMRON

PC BOARD-USE RELAY

Cat. No. K01-E1-3


Latching Type

Model **LZN**

Low Profile, PC Board-use
Magnetic Latching Relay
Ideal for Memory Circuit

■ FEATURES

- Latching ability little affected by aging, and excellent resistance to vibration and shock.
- Continuous coil ratings.
- Long life — 100 million mechanical operations.
- Sealed type is also available.

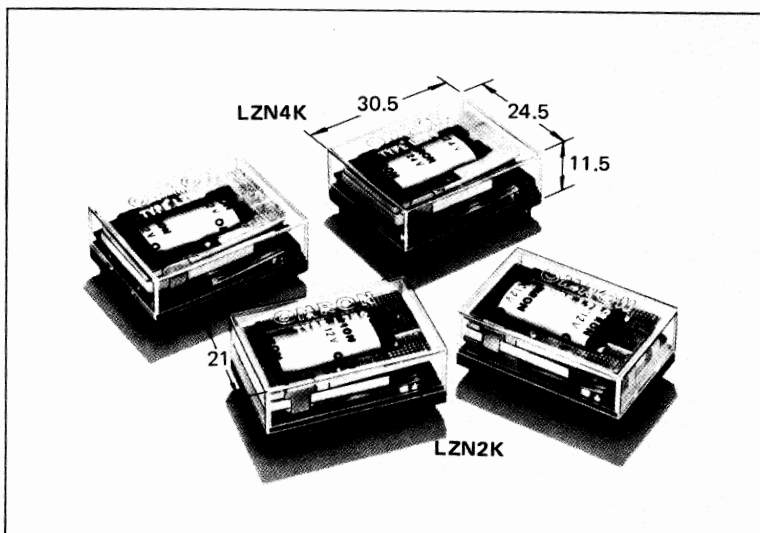

■ AVAILABLE TYPES

Classi- fication	Type Contact form	General purpose		High capacity	
		Unsealed	Sealed	Unsealed	Sealed
Standard type	DPDT	LZN2K	LZNQ2K	LZN203K	LZNQ203K
	4PDT	LZN4K	LZNQ4K	LZN403K	LZNQ403K
Standard approved type	DPDT	LZN2K-US	LZNQ2K-US	LZN203K-US	LZNQ203K-US
	4PDT	LZN4K-US	LZNQ4K-US	LZN203K-US	LZNQ403K-US

OMRON

STANDARD TYPE

■ SPECIFICATIONS

• COIL RATINGS

Type	Rated voltage (V)	Set coil				Reset coil			Must set voltage	Must reset voltage	Maximum voltage	Power consumption (VA, W)	
		Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)				Set coil	Reset coil
				Armature OFF	Armature ON								
LZN2K	5 VDC	204	24.5	0.051	0.094	192	26	0.014	80 max.	80 max.	110	Approx. 1	Approx. 1
LZN203K	6 VDC	179	33.5	0.064	0.117	152	39.5	0.022					
LZNQ2K	12 VDC	85.7	140	0.28	0.51	85.7	140	0.07					
24 VDC	44	545	1.1	2	45.7	525	0.25						
LZNQ203K	48 VDC	20.7	2,320	4.4	8	17.8	2,700	1.2					
LZN4K	5 VDC	246	20.3	0.041	0.065	266	18.8	0.01	80 max.	80 max.	110	Approx. 1.3	Approx. 1.3
LZN403K	6 VDC	224	26.8	0.053	0.085	210	28.6	0.016					
LZNQ4K	12 VDC	100	120	0.26	0.42	118	102	0.054					
24 VDC	57.8	415	0.82	1.3	53.3	450	0.24						
LZNQ403K	48 VDC	30	1,600	2.8	4.5	24.6	1,950	0.87					

NOTES: 1. The rated current is measured at a coil temperature of 20°C with tolerances of +15%, -20%.
2. Performance characteristic data are measured at a coil temperature of 5 to 35°C.


• CONTACT RATINGS

Load	General purpose type		High capacity type	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Item				
Rated load	110 VAC 0.5A 24 VDC 1A	110 VAC 0.25A 24 VDC 0.5A	110 VAC 2A 24 VDC 3A	110 VAC 1A 24 VDC 1.5A
Carry current	3A		3A	
Max. operating voltage	250 VAC 125 VDC		250 VAC 125 VDC	
Max. operating current	2A	1A	3A	1.5A
Max. switching capacity	110VA, 60W	60VA, 30W	220VA, 120W	110VA, 60W
Minimum permissible load	0.1 VDC 0.1mA (ref. value)		—	


CHARACTERISTIC DATA

Electrical service life

AC load

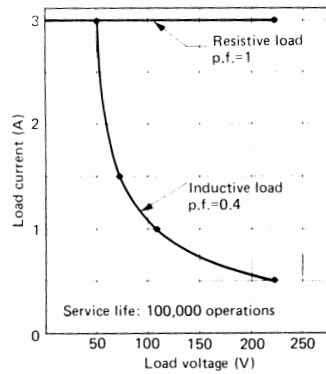

DC load

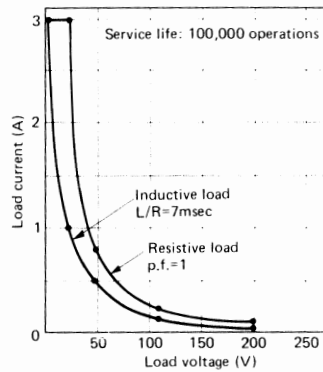


CHARACTERISTICS

Item	Type	Single crossbar	Bifurcated crossbar
Contact resistance		100mΩ max.	
Operate time		20msec max.	
Release time		AC: 20msec max. DC: 10msec max.	
Operating frequency		Mechanically: 18,000 operations/hour Under rated load: 1,800 operations/hour	
Insulation resistance		100MΩ min. (at 500 VDC)	
Dielectric strength		1,500 VAC, 50/60Hz for 1 minute (1,000 VAC, 50/60Hz for 1 minute between non-continuous contacts)	
Vibration		Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude	
Shock		Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)	
Ambient temperature		Operating: -10 to +60°C	
Humidity		45 to 85% RH	
Service life		Mechanically: 50,000,000 operations min. (at operating frequency of 18,000 operations/hour)	Mechanically: 5,000,000 operations min. (at operating frequency of 18,000 operations/hour)
		Electrically: See "CHARACTERISTIC DATA."	
Weight		DPDT: Approx. 30g 4PDT: Approx. 35g	


NOTE: The data shown above are of initial value.

DIMENSIONS

• G2C-212P, G2C-232P




• G2C-412P, G2C-432P




Bottom view





• G2C-212P-V, G2C-232P-V







• G2C-412P-V, G2C-432P-V



Terminal arrangement (Bottom view)

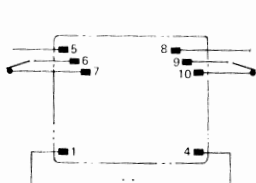

Mounting holes

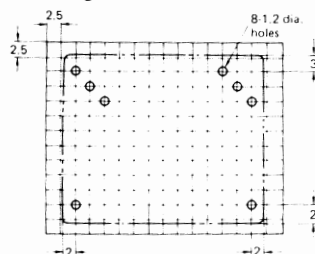

NOTE: A tolerance of ±0.1mm applies to all dimensions.


■ ACCESSORIES

● CONNECTING SOCKETS

Type of relay	Back connecting socket		Applicable relay hold-down clip	Applicable socket mounting plate
	Solder terminals	P.C. terminals		
G2C-212P-V G2C-232P-V	P3A-08A	P3A-08P	PYC	P3A-P1 *
G2C-412P-V G2C-432P-V	P3A-14A	P3A-14P	P3A-C	P3A-P *


NOTE: * A total of 24 relays can be mounted on a mounting plate.

Mounting height of relay with socket

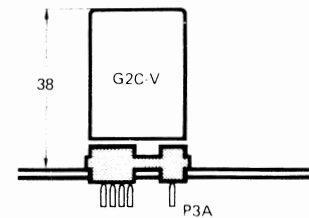


● P3A-08A


→ Bottom view




● P3A-08P




● P3A-14A




● P3A-14P




Mounting holes
P3A-08A




P3A-08P
(Bottom view)



P3A-14A



P3A-14P
(Bottom view)

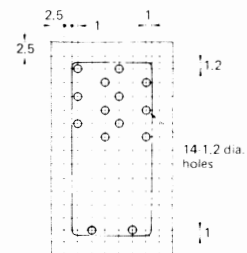


NOTES: 1. Recommended panel thickness is 1 to 1.6mm.
2. Provide a distance of 3mm min. between two juxtaposed relays.

● RELAY HOLD-DOWN CLIPS


PYC

P3A-C




● SOCKET MOUNTING PLATES (t=1.6)

P3A-P1




P3A-P

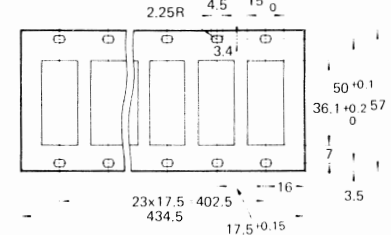

■ HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

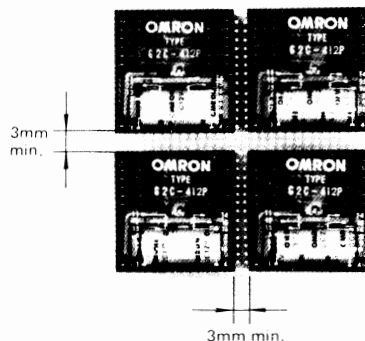

STANDARD APPROVED TYPE

■ SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

● RATINGS


UL recognized type (File No. E41515)/
CSA certified type (File No. LR31928-13, -14, -15)

Type	Contact form	Coil ratings	Contact ratings
G2C-212P(-V)-US G2C-412P(-V)-US	DPDT 4PDT	6 to 220 VAC 6 to 100 VAC	3A 120 VAC (inductive load) 3A 30 VDC (resistive load)

How to Solder Unsealed Type PC Relays

• Manual Soldering

It is recommended that the PC relay be manually soldered after automatic soldering of other components to protect the relay contacts from excessive flux. When soldering, apply a soldering iron rated at 30 to 60W (tip temperature: 280 to 300°C) quickly (within 3sec) and firmly. Then, be sure to confirm that the relay operates normally. Process the PC board beforehand as shown below to prevent the relay mounting holes from being filled with solder and to facilitate subsequent manual soldering.

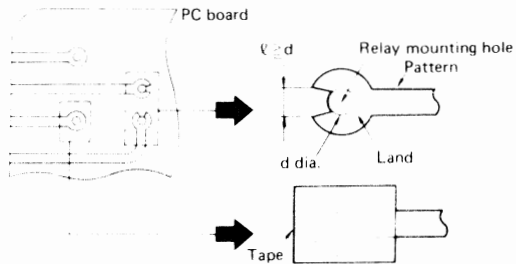

• Automatic flow soldering

1) Flux application

- a. Apply flux sparingly and evenly to prevent penetration of solder flux into the relay. In this case, adjust the position of flux level so that the upper surface of the PC board is not flooded with flux.

- b. Use an anti-corrosive rosin type flux.
- c. For flux solvent, use alcohol type which is less chemically reactive.
- d. Preheating process subsequent to flux application is effective to dry the applied flux, facilitate metal melting and prevent penetration of flux into the relay. However, when preheating the PC board, keep the temperature of the land side of the PC board to less than 80°C.

2) Soldering

- a. Move the bottom of the PC board over a flowing wave of molten solder for the shortest possible period (approx. 3sec) at a solder temperature of 240°C. In this case, be sure that the PC board is not flooded with solder.
- b. Use a solder conforming with H60 (Sn 60, Pb 40) or H63 (Sn 63, Pb 37) JIS Z 3282.

3) Cooling

Cool forcibly the PC board with fan, etc.

4) Cleaning

As much as possible, avoid cleaning the terminals. When cleaning for some reason or other, care should be taken to the following:

- a. Use alcohol or freon type solvents which are less chemically reactive. Note that use of other solvents may damage the plastic material used for the relay base, etc.
- b. Clean the soldered PC board pattern side only to prevent the flux-contaminated solvent from entering the relay.


NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.

To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

Low Profile Power Relay Breaks up to 8A Loads

FEATURES

- Miniature, low profile design.
- Available in horizontal (flat pack) and vertical mount types ideal for space saving on PCB.
- Conforms to VDE0110C/250 for creepage distance and clearance of insulation.
- Switching capability of up to 8A loads at 220 VAC.

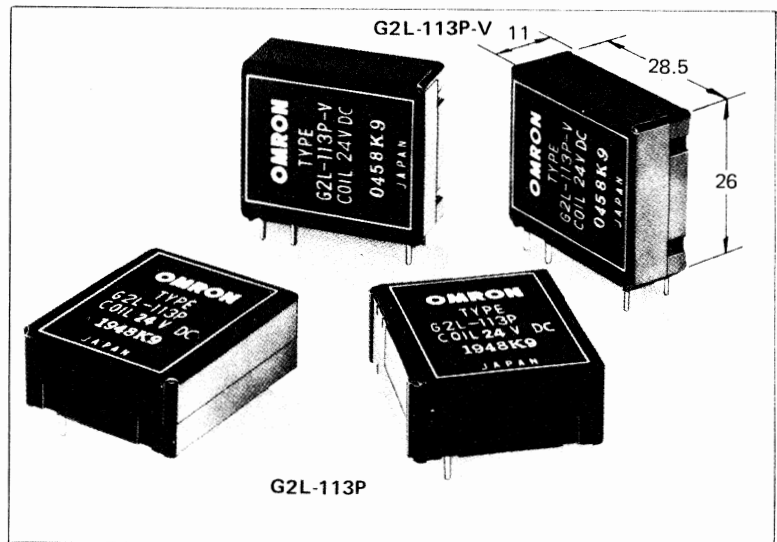

G2L-113P

AVAILABLE TYPES

Type		Horizontal mount (Flat pack)	Vertical mount
Classification	Contact form		
Standard type	SPDT	G2L-113P	G2L-113P-V
Standard approved type		G2L-113P-US	G2L-113P-V-US

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Item	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
Rated voltage								
3 VDC	167	18	0.065	0.075	70 max.	10 min.	110 max.	Approx. 500
5 VDC	100	50	0.18	0.20				
6 VDC	83	72	0.26	0.29				
12 VDC	41.4	290	1.05	1.20				
24 VDC	20.9	1,150	4.21	4.80				
48 VDC	10.4	4,600	16.8	19.2				
60 VDC	8.3	7,200	26.2	29.8				


NOTE: The rated current and coil resistance are measured at a coil temperature of 20° C with tolerances of +15%.

CONTACT RATINGS


Item	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Rated load	220 VAC 8A 24 VDC 8A	220 VAC 5A 24 VDC 5A
Carry current	8A	
Max. operating voltage	250 VAC, 250 VDC	
Max. operating current	8A	5A
Max. switching capacity	1,800VA, 200W	1,100VA, 120W
Min. permissible load (reference value)	5 VDC 1mA	

CHARACTERISTIC DATA

Maximum switching capacity



Electrical service life




CHARACTERISTICS

Contact resistance	30mΩ max.
Operate time	15msec max.
Release time	10msec max.
Operating frequency	Mechanically: 18,000 operations/hour Electrically: 1,800 operations/hour (under rated load)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	2,500 VAC, 50/60Hz for 1 minute (1,000 VAC between non-continuous contacts)
Vibration	Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 0.8mm double amplitude
Shock	Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)
Ambient temperature	Operating: -40 to +70°C
Humidity	45 to 85%RH
Service life	Mechanically: 20,000,000 operations min. (at operating frequency of 18,000 operations/hour) Electrically: See "CHARACTERISTIC DATA."
Weight	Approx. 15g

NOTE: The data shown are of initial value.


DIMENSIONS

G2L-113P

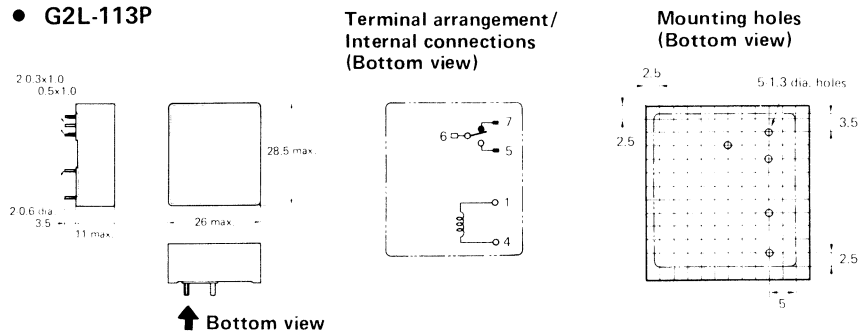

↑ Bottom view


G2L-113P-V

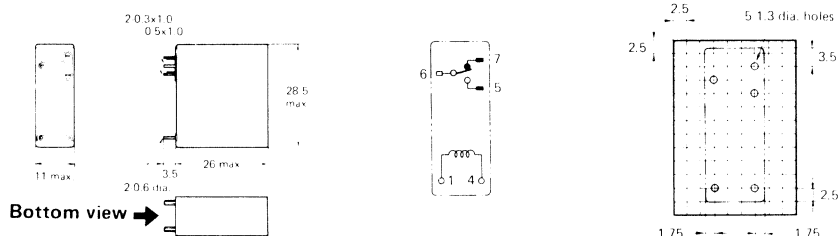

Bottom view →

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

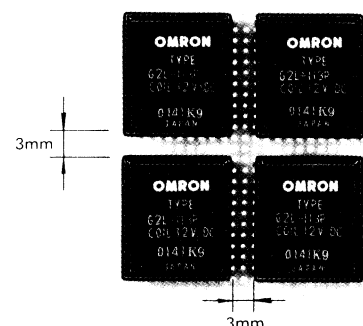

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings
G2L-113P-US	SPDT	3 to 60 VDC	10A 250 VAC or 8A 24 VDC (resistive load) TV-5
G2L-113P-V-US			

CSA certified type (File No. LR24825-25)

Type	Contact form	Coil ratings	Contact ratings
G2L-113P-US	SPDT	3 to 60 VDC	10A 250 VAC or 8A 24 VDC (resistive load) TV-5
G2L-113P-V-US			

SEV listed type (File No. D791/262)

Type	Contact form	Coil ratings	Contact ratings
G2L-113P-US	SPDT	3 to 60 VDC	8A 220 VAC (resistive load)
G2L-113P-V-US			

NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.


Latching Type
PC BOARD-USE RELAY

Model **LZN**

**Low Profile, PC Board-use
Magnetic Latching Relay
Ideal for Memory Circuit**

FEATURES

- Latching ability little affected by aging, and excellent resistance to vibration and shock.
- Continuous coil ratings.
- Long life — 100 million mechanical operations.
- Sealed type is also available.

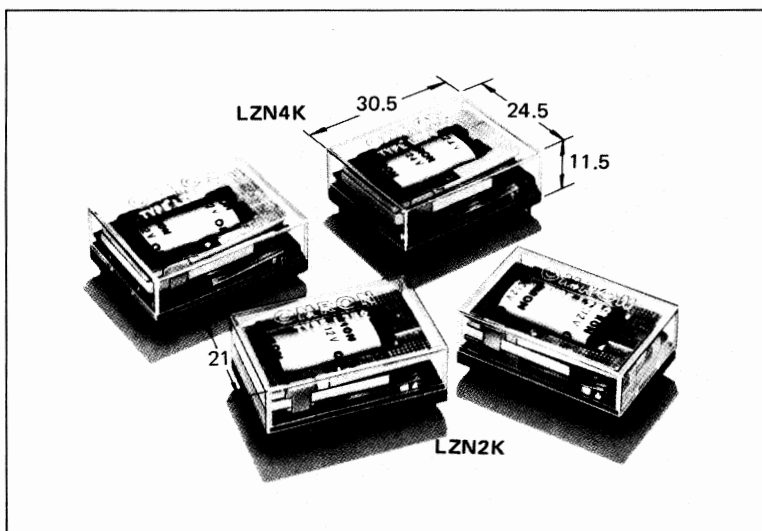
AVAILABLE TYPES

Type	Contact form	General purpose		High capacity	
		Unsealed	Sealed	Unsealed	Sealed
Standard type	DPDT	LZN2K	LZNQ2K	LZN203K	LZNQ203K
	4PDT	LZN4K	LZNQ4K	LZN403K	LZNQ403K
Standard approved type	DPDT	LZN2K-US	LZNQ2K-US	LZN203K-US	LZNQ203K-US
	4PDT	LZN4K-US	LZNQ4K-US	LZN203K-US	LZNQ403K-US

OMRON

STANDARD TYPE
SPECIFICATIONS
COIL RATINGS

Type	Rated voltage (V)	Set coil				Reset coil			Must set voltage	Must reset voltage	Maximum voltage	Power consumption (VA, W)	
		Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)					
				Armature OFF	Armature ON			Armature OFF					
LZN2K	5 VDC	204	24.5	0.051	0.094	192	26	0.014	80 max.	80 max.	110	Approx. 1	Approx. 1
LZN203K	6 VDC	179	33.5	0.064	0.117	152	39.5	0.022					
LZNQ2K	12 VDC	85.7	140	0.28	0.51	85.7	140	0.07					
LZNQ203K	24 VDC	44	545	1.1	2	45.7	525	0.25					
	48 VDC	20.7	2,320	4.4	8	17.8	2,700	1.2					
LZN4K	5 VDC	246	20.3	0.041	0.065	266	18.8	0.01				Approx. 1.3	Approx. 1.3
LZN403K	6 VDC	224	26.8	0.053	0.085	210	28.6	0.016					
LZNQ4K	12 VDC	100	120	0.26	0.42	118	102	0.054					
LZNQ403K	24 VDC	57.8	415	0.82	1.3	53.3	450	0.24					
	48 VDC	30	1,600	2.8	4.5	24.6	1,950	0.87					

NOTES: 1. The rated current is measured at a coil temperature of 20°C with tolerances of +15%, -20%.
2. Performance characteristic data are measured at a coil temperature of 5 to 35°C.

CONTACT RATINGS

Load	General purpose type		High capacity type	
	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R=7msec)
Rated load	110 VAC 0.5A 24 VDC 1A	110 VAC 0.25A 24 VDC 0.5A	110 VAC 2A 24 VDC 3A	110 VAC 1A 24 VDC 1.5A
Carry current	3A		3A	
Max. operating voltage	250 VAC 125 VDC		250 VAC 125 VDC	
Max. operating current	2A	1A	3A	1.5A
Max. switching capacity	110VA, 60W	60VA, 30W	220VA, 120W	110VA, 60W
Minimum permissible load	0.1 VDC 0.1mA (ref. value)		—	


CHARACTERISTICS

Item	Classification	General purpose type	High capacity type
Contact resistance		100mΩ max.	
Operate (Set) time		15msec max. (Set pulse width: 15msec min.)	
Release (Reset) time		10msec max. (Reset pulse width: 10msec min.)	
Operating frequency		Mechanically: 18,000 operations/hour Under rated load: 1,800 operations/hour	
Insulation resistance		100MΩ min. (at 500 VDC)	
Dielectric strength		1,000 VAC, 50/60Hz for 1 minute (750 VAC between non-continuous contacts)	
Vibration		Mechanical durability: 10 to 55Hz; 3.0mm double amplitude Malfunction durability: 10 to 110Hz; 0.85mm double amplitude (10 to 50Hz; 0.85 double amplitude in the direction of armature operation with relay in de-energized state)	
Shock		Mechanical durability: 1,000m/s ² (approx. 100G's) Malfunction durability: When energized: 150m/s ² (approx. 15G's) When de-energized: 100m/s ² (approx. 10G's) (4G's min. in the direction of armature operation)	
Ambient temperature		Operating: -10 to +60°C	
Humidity		45 to 85% RH	
Service life		Mechanically: 100,000 operations min. (at operating frequency of 1,800 operations/hour) Electrically: See "CHARACTERISTIC DATA."	
Weight		LZN2K: 13g, LZN4K: 15g	

NOTE: The data shown above are of initial value.


CHARACTERISTIC DATA

Maximum switching capacity LZN2K, LZN4K

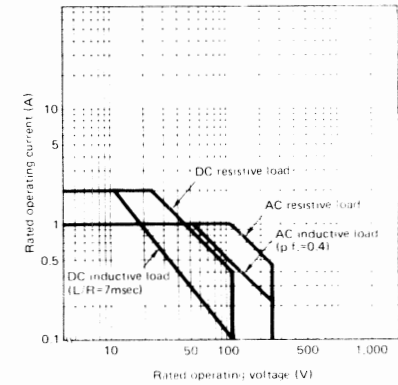


DIMENSIONS


LZN2K, LZN203K

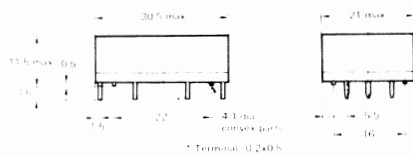


LZNQ2K

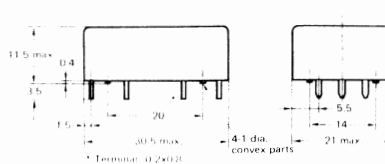

LZN4K, LZN403K

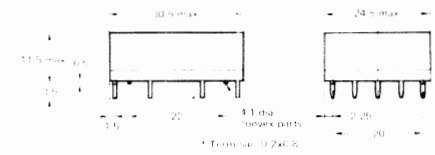


LZNO4K

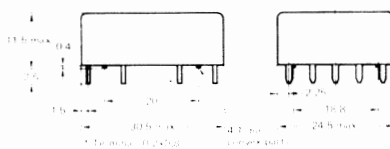


Terminal arrangement/Internal connection (Bottom view)

LZN2K, LZN203K, LZNQ2K LZN4K, LZN403K, LZNO4K

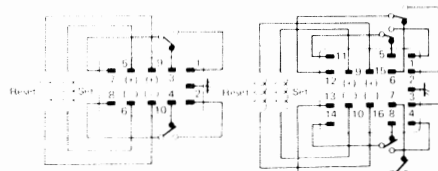


Mounting holes (Bottom view)

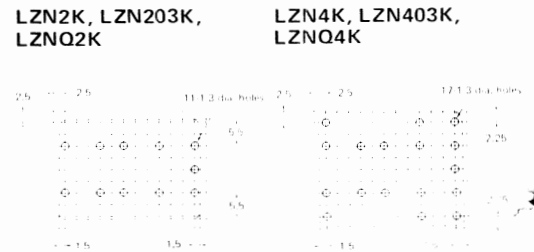

HINTS ON CORRECT USE

When a number of relays are to be mounted on a PC board, be sure to provide mounting space as shown below.

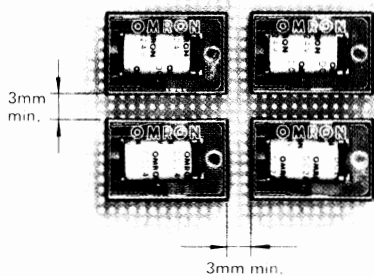

STANDARD APPROVED TYPE

SPECIFICATIONS/DIMENSIONS

Same as the Standard Type with the following exception.

RATINGS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings
General purpose	DPDT	5 to 48 VDC	0.5A 100 VAC (resistive load) 0.4A 100 VAC (inductive load) 2A 30 VDC (inductive load)
High capacity	4PDT	VDC	2A 100 VAC (resistive load) 1.6A 100 VAC (inductive load) 3A 30 VDC (inductive load)

CSA certified type (File No. LR24825-24)

Type	Contact form	Coil ratings	Contact ratings
General purpose	DPDT	5 to 60 VDC	0.5A 125 VAC (resistive load) 2A 30 VDC (resistive load) 0.4A 125 VAC (inductive load)
High capacity	4PDT	VDC	2A 100 VAC (resistive load) 3A 30 VDC (resistive load) 1.6A 125 VAC (inductive load)


NOTE: ALL DIMENSIONS SHOWN IN THIS CATALOG ARE IN UNITS OF MILLIMETERS.
To convert millimeters into inches multiply by 0.03937. To convert grams into ounces multiply by 0.03527.

Low Profile, PC Board-use Relay Ideal for High-density Circuit Design

FEATURES

- Horizontal mount type features a low profile of 12mm max., thus permitting high-density design of P.C. board.
- Vertical mount type ideal for effective mounting space utilization
- 2.5mm grid terminal arrangement for both the relay and connecting socket.
- A wide variety of contacts from minute load to power load switching.
- AC coil versions available for the horizontal mount type (DPDT type only).

AVAILABLE TYPES

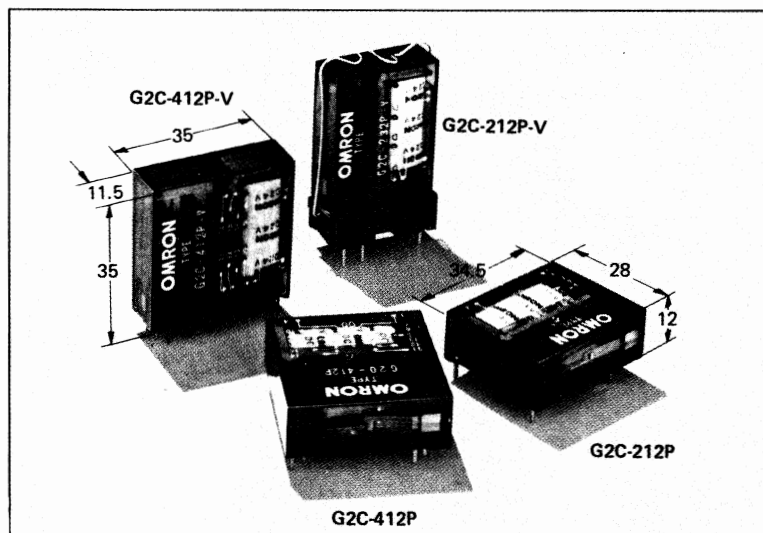

Classification	Type Contact form	Horizontal mounting		Vertical mounting	
		DPDT	4PDT	DPDT	4PDT
Standard type	Single crossbar contact	G2C-212P	G2C-412P	G2C-212P-V	G2C-412P-V
	Bifurcated crossbar contact	G2C-232P	G2C-432P	G2C-232P-V	G2C-432P-V
Standard approved type	Single crossbar contact	G2C-212P-US	G2C-412P-US	G2C-212P-V-US	G2C-412P-V-US
	Bifurcated crossbar contact	—	—	—	—

OMRON

STANDARD TYPE

SPECIFICATIONS

COIL RATINGS

Contact form	Rated voltage (V)		Rated current (mA)		Coil resistance (Ω)	Coil inductance (ref. value) (H)		Must operate voltage	Must dropout voltage	Maximum voltage	Power consumption (VA, W)				
			50Hz	60Hz		Armature OFF	Armature ON					% of rated voltage			
DPDT	AC	6	252	200	10	0.052	0.063	30 min.	110	Approx. 1.2					
		12	126	100	48	0.240	0.315								
		24	63	50	165	0.77	0.98								
		50	30.2	24	750	3.2	4.2								
		100	15.2	12	3550	15.3	21.8								
		110	—	14.6	3550	15.3	21.8								
	DC	200	7.56	6	14500	57.1	79.3				80 max.	150	Approx. 0.4		
		220	—	7.3	14500	57.1	79.3								
		5	80.6	62	0.26	0.41	10 min.							110	Approx. 0.9
		6	70.6	85	0.395	0.617									
12	33.3	360	2.16	3.33											
24	17.4	1380	8.48	12.2											
48	8.7	5500	32.5	49.4											
100	4.2	27000	157.4	262.2											
4PDT	DC	5	166.7	30	0.12	0.18									
		6	150	40	0.18	0.25									
		12	75	160	0.91	1.15									
		24	39.3	610	3.56	4.6									
		48	19.5	2460	13.2	18.4									
		100	10.9	9200	51.7	63.1									

NOTE: The rated current, coil resistance and inductance are measured at a coil temperature of 20 °C with tolerances of +15%, -20% for AC rated current and +15% for DC rated current, and ±15% for rated coil resistance.


CONTACT RATINGS

Type	Single crossbar		Bifurcated crossbar	
Load	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R =7msec)	Resistive load (p.f.=1)	Inductive load (p.f.=0.4, L/R =7msec)
Item				
Rated load	220 VAC 3A 24 VDC 3A	220 VAC 1A 24 VDC 1A	110 VAC 0.5A 24 VDC 1A	110 VAC 0.3A 24 VDC 0.3A
Carry current	3A		1A	
Max. operating voltage	250 VAC; 125 VDC			
Max. operating current	3A	1A	1A	0.3A
Max. switching capacity	660VA 72W	220VA 24W	55VA 24W	33VA 8W
Minimum permissible load	1 VDC 1mA (ref. value)			


● CHARACTERISTIC DATA

Electrical service life

AC load

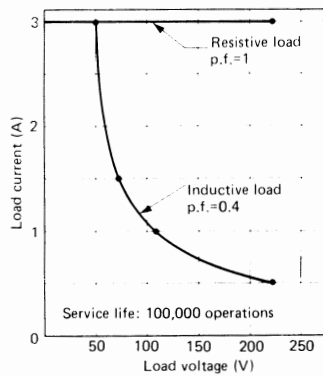

DC load

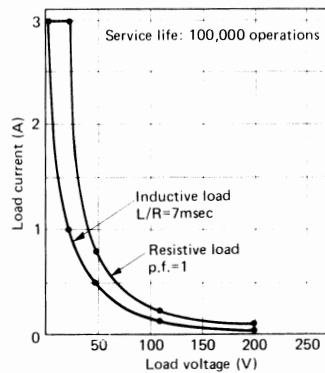

● CHARACTERISTICS

Item	Type	Single crossbar	Bifurcated crossbar
Contact resistance		100mΩ max.	
Operate time		20msec max.	
Release time		AC: 20msec max. DC: 10msec max.	
Operating frequency		Mechanically: 18,000 operations/hour Under rated load: 1,800 operations/hour	
Insulation resistance		100MΩ min. (at 500 VDC)	
Dielectric strength		1,500 VAC, 50/60Hz for 1 minute (1,000 VAC, 50/60Hz for 1 minute between non-continuous contacts)	
Vibration		Mechanical durability: 10 to 55Hz; 1.5mm double amplitude Malfunction durability: 10 to 55Hz; 1.5mm double amplitude	
Shock		Mechanical durability: 1,000m/sec ² (approx. 100G's) Malfunction durability: 100m/sec ² (approx. 10G's)	
Ambient temperature		Operating: -10 to +60°C	
Humidity		45 to 85% RH	
Service life		Mechanically: 50,000,000 operations min. (at operating frequency of 18,000 operations/hour)	Mechanically: 5,000,000 operations min. (at operating frequency of 18,000 operations/hour)
		Electrically: See "CHARACTERISTIC DATA."	
Weight		DPDT: Approx. 30g 4PDT: Approx. 35g	



NOTE: The data shown above are of initial value.

■ DIMENSIONS



● G2C-212P, G2C-232P

● G2C-412P, G2C-432P





● G2C-212P-V, G2C-232P-V ● G2C-412P-V, G2C-432P-V







Bottom view



Terminal arrangement (Bottom view)



Mounting holes



NOTE: A tolerance of ±0.1mm applies to all dimensions.