

NEC

Miniature Power Relays

MR71/72 Series

Base

Perfect separation
between coil and
contacts

Contacts

Cover

Movable contact spring

Terminal

Armature

Hinge Spring


Coil

High heat resistance

Yoke

Coil Terminal

Actuating Card

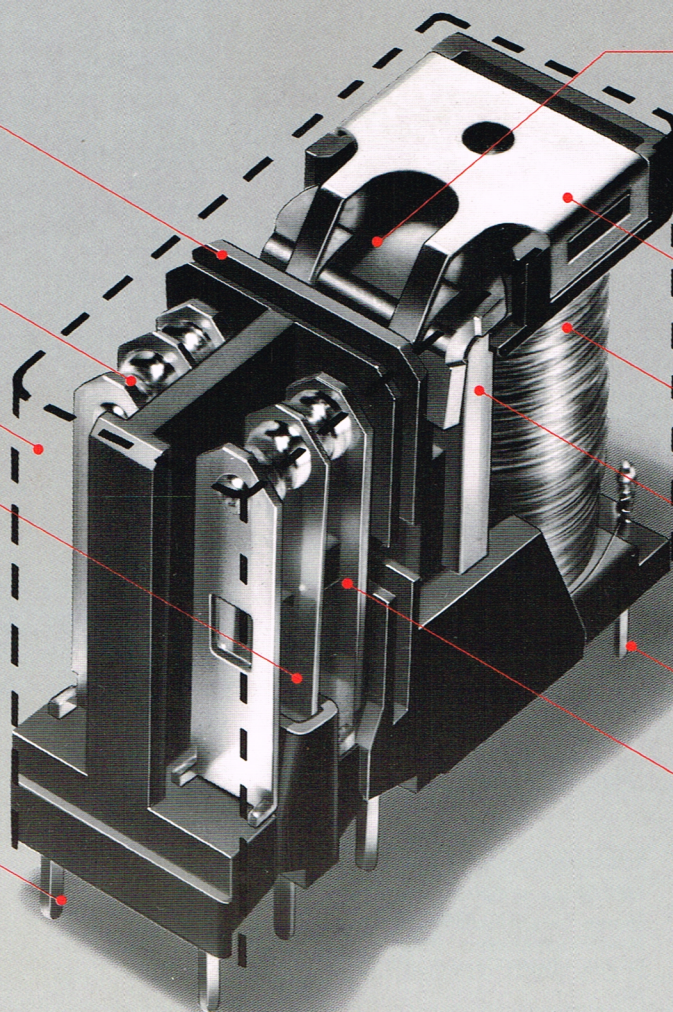

**Australia Telecom
Approval**
Approval No. RA 85/105

● GENERAL

The MR70 series miniature power relay is suitable for the applications which require high power switching in a compact package. Typical applications are remote controlled TV, copiers, vending machines and air conditioners.




● FEATURES

- MR70 can withstand 10,000V surge in $(1 \times 40) \mu\text{sec}$ between coil and contact.
- 111A inrush current (TV5 requirement)
- Small mounting space for high density packaging.
- UL / CSA / VDE under application.

MINIATURE POWER RELAYS MR71/72 SERIES

NUMBERING SYSTEM

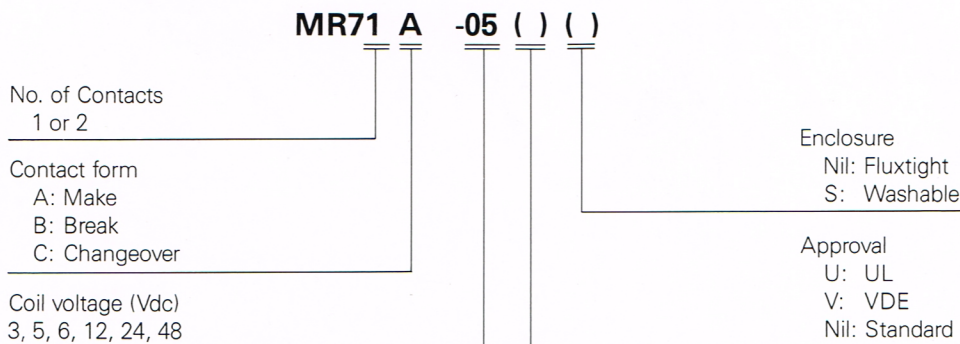

COIL RATING

at 25°C (77°F)

Nominal Coil Voltage (VDC)	Coil Resistance ($\Omega \pm 10\%$)	Operate Voltage (VDC)	Release Voltage (VDC)*	Max. Coil Voltage (VDC)
3	18	2.1	0.3	3.3
5	50	3.5	0.5	5.5
6	72	4.2	0.6	6.6
12	285	8.4	0.12	13.2
24	1,150	16.8	0.24	26.4
48	4,600	33.6	0.48	52.8



*Relay with 15% of nominal coil voltage as release voltage is available upon request.

SPECIFICATIONS

ITEMS		SPECIFICATIONS	
		MR71 Series	MR72 Series
Contact Form		1 Form A, B or C	2 Form A, B or C
Contact Rating	Nom. Switching Power	30VDC-10A, 250VAC-10A (resistive)	30VDC-5A, 250VAC-5A (resistive)
	Max. Switching Power	300W, 2,500VA	150W, 1,250VA
	Max. Switching Voltage	125VDC, 380VAC	125VDC, 380VAC
	Max. Switching Current	10A	5A
	Max. Carrying Current	14A	7A
	Min. Switching Power	5VDC, 1A	5VDC, 0.5A
Contact Resistance (initial)		100m Ω max. measured at 6Vdc, 2A	
Contact Material		Silver Oxide Complex	Silver Nickel Alloy
Operate Time		15ms max.	
Release Time		5ms max.	
Power Consumption (Approx)		0.5W (Nominal), 0.25W (Operate)	
Insulation Resistance		1,000M Ω min. at 500VDC	
Breakdown Voltage (for 1 min.)		Between Coil and Contacts 5,000VAC Between Open Contacts 1,000VAC Between Adjacent Contacts 3,500 VAC (for MR72)	
Shock Resistance		10G	
Vibration Resistance		10G	
Ambient Temperature		-40°C ~ +70°C (-40°F ~ +158°F)	
Coil Temperature Rise		30°C at nominal coil voltage (86°F)	
Life	Mechanical	10 million ops	
	Electrical at Nom. switching power	0.1 Million ops	

All specifications are subject to be changed without notice.

DIMENSIONS AND P/C BOARD PATTERN

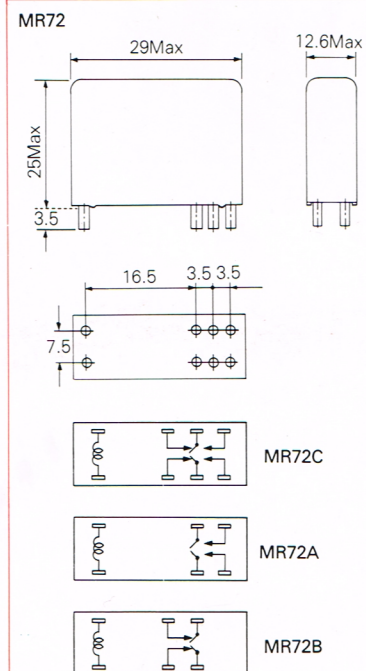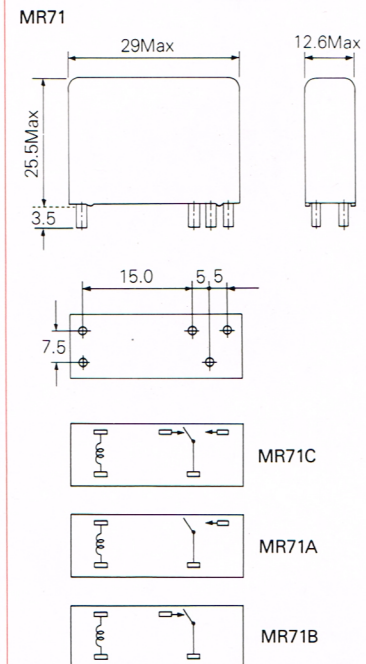

NEC NEC Corporation

NEC Building
33-1, Shiba-Gochome, Minato-ku
Tokyo 108, Japan
Tel: Tokyo 454-1111
Cable Address: "NEC TOKYO"
Telex Address: NECTOK J22686

Electromechanical Devices Division
29-11, Shiba-Gochome, Minato-ku
Tokyo 108, Japan
Tel: Tokyo 456-6111

NEC America, Inc.
Head Office
8 Old Sod Farm Road, Melville,
N.Y. 11747 U.S.A.
Tel: 516-752-7000
Telex: 14-4658 NEC AMER MELV

NEC Electronics (Europe) GmbH
Oberrather Str. 4, 4000 Düsseldorf 30,
West Germany
Tel: 0211-650301
Telex: 8589960 NEC D,

NEC Electronics (Germany) GmbH
Oberrather Str. 4, 4000 Düsseldorf 30,
West Germany
Tel: 0211-650302
Telex: 8589960 NEC D,

NEC Electronics France S.A.
Tour Chenonceaux
204, Rond-Point du Pont-de-Sevres
92516 Boulogne-Billancourt France
Tel: 1-609-9004
Telex: 203544 NECEF F,

NEC Electronics (UK) Limited
Block 3 Carfin Industrial Estate Matherwell,
ML 14 UL, Scotland, United Kingdom
Tel: 0698-732-221
Telex: 777565 NECUK G

NEC Electronics Italiana S.R.L.
Via Cardano 3, 20124 Milano, Italy
Tel: 02-630368/632646
Telex: 315355 NEC EITI,

NEC Australia Pty. Ltd.
649-655 Springvale Road, Mulgrave,
Victoria 3170
Tel: 03-560-5233
Cable: Nippeco
Telex: AA31009

Cat. No. E23047
85053001NM
Printed in Japan