


698 – 6000 MHz

Catalogue 2012

Base Station Antennas, Filters, Combiners and Amplifiers for Mobile Communications

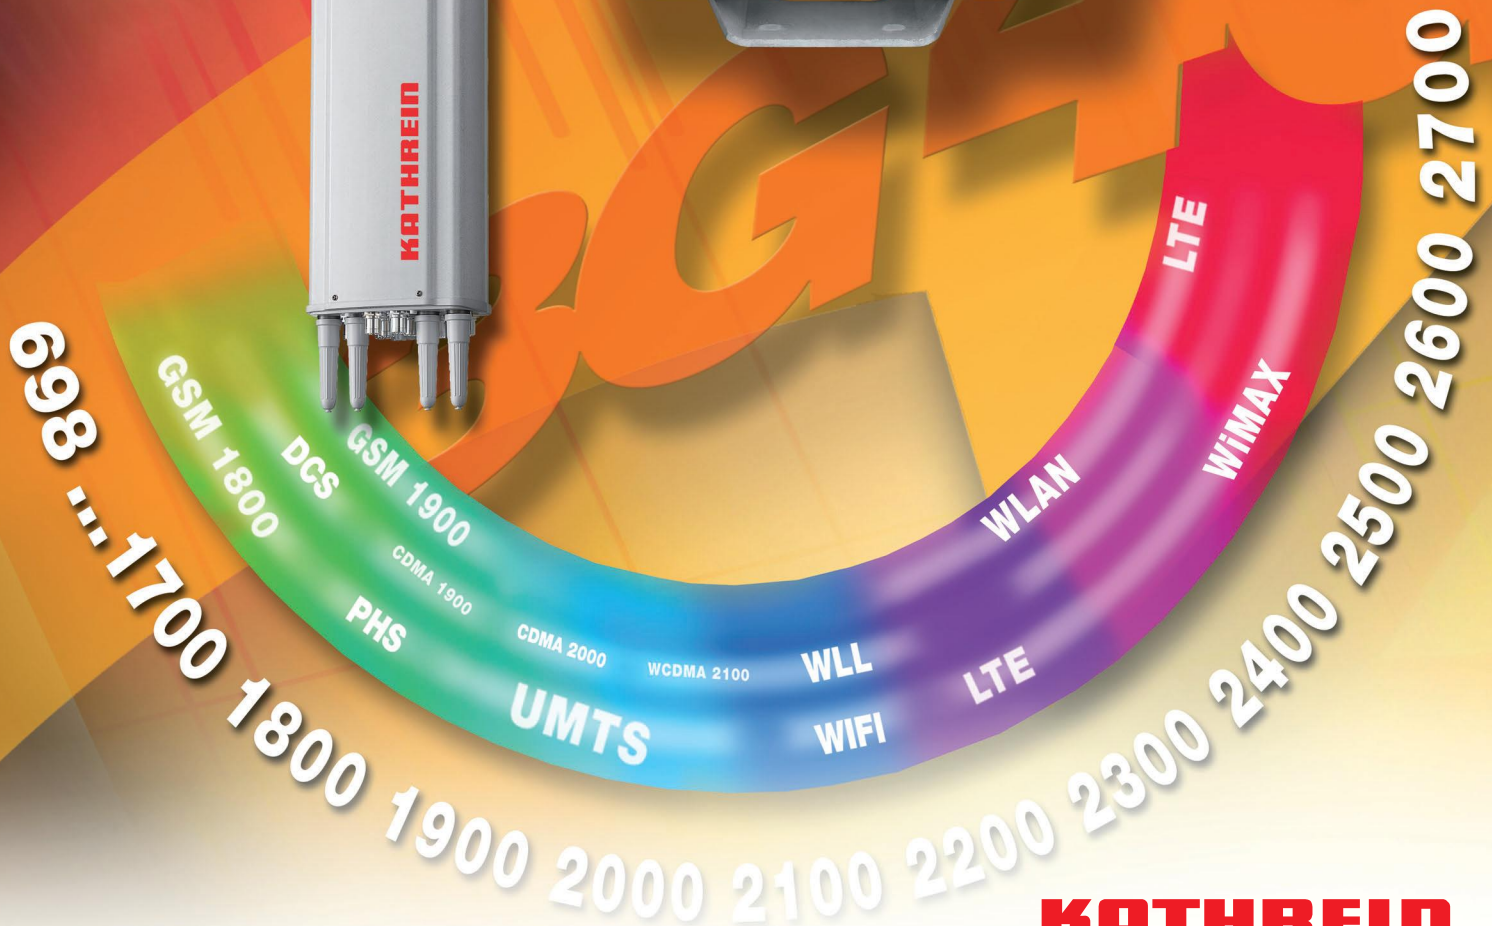

KATHREIN

Antennen · Electronic

Photo on title page: Kathrein offers a full range of products for Mobile Communication Networks over the current used frequency ranges.

Catalogue Issue 01/2012

All data published in previous catalog issues hereby becomes invalid.
We reserve the right to make alterations in accordance with the requirements of our customers,
therefore for binding datas please check valid data sheets on our homepage: www.kathrein.de!

Please note:

As a result of more stringent legal regulations and judgements regarding product liability, we are obliged to point out certain risks that may arise when products are used under extraordinary operating conditions.

The mechanical design is based on the environmental conditions as stipulated in ETS 300 019-1-4 and thereby respects the static mechanical load imposed on an antenna by wind at maximum velocity.

Extraordinary operating conditions, such as heavy icing or exceptional dynamic stress (e.g. strain caused by oscillating support structures), may result in the breakage of an antenna or even cause it to fall to the ground.

These facts must be considered during the site planning process.

The details given in our data sheets have to be followed carefully when installing the antennas and accessories.

In addition, please use our information brochure about mounting configurations.

The installation team must be properly qualified and also be familiar with the relevant national safety regulations.

Calculation of Wind Loading on Kathrein Base Station Antennas

In 1998 the co-ordinating committee of the Standardisation Group for Building Standards decided that during the harmonisation process of European standards, the DIN-Standards shall be modified and republished based on the European Pre-Standards.

As a result of this harmonisation process the new edition of DIN 1055 Part 4 was finally published in 2005. This standard defines the worst case loading example created by natural wind forces on bearing structures and their individual elements. The standard thereby defines the principles for calculating the maximum loading and for confirming the bearing capacity of structures in general.

One of the major changes in the calculation of the wind load under DIN 1055-4 is the definition of the value cf_0 . Due to these changes in the calculation formula within the standard, the calculated wind load of some Base Station Antennas is higher than previously specified on earlier data sheets.

During 2009 Kathrein has migrated to calculating and specifying all wind loads in accordance with DIN 1055-4 (similar to the European Standard EN 1991-1-4) on the online data sheets. If the wind load has been calculated under the updated standard then this will be explicitly mentioned on the data sheet.

The physical dimensions of our products have not been modified unless otherwise specified, nor has the actual wind loading surface area of the antennas increased in any way.



“Quality leads the way”

As the world's oldest and largest antenna manufacturer, we live up to claim “Quality leads the way” on a daily basis. One of the fundamental principles is to always be on the lookout for the best solution for our customers.

Our quality assurance system and our environmental management system apply to the entire company and are certified by TÜV according to EN ISO 9001 and EN ISO 14001.

The catalogue is splitted into two parts.

Part 1: Antennas

Part 2: Filters, Combiners and Amplifiers

Pages

Antennas

7 – 221

Filters, Combiners, Amplifiers

223 – 346

An actual list of Kathrein's current International Representatives
can be found on our homepage

www.kathrein.de

Please contact for

Sales queries, orders, catalogues or CD-ROM:

Fax: +49 80 31 184-820

E-Mail: central.sales@kathrein.de

Technical Information:


Fax: +49 80 31 184-973

E-Mail: mobilcom@kathrein.de


List of available Catalogues for Mobile Communication Antennas and Accessories

KATHREIN
Antennen · Electronic


**698 – 6000 MHz Base Station Antennas,
Filters, Combiners and Amplifiers
for Mobile Communications**




**27 – 512 MHz KATHREIN-Antennas
and Antenna Line Products**



**Professional Antennas, Filters, Combiners and
Multicouplers for Ground-to-Air Communications**



Antennas for Trains and Buses



**The listed catalogues
are also available on CD-ROM**



Part 1:

Antennas for Mobile Communications

698 – 894 MHz 1710 – 2170 MHz	XPol XXPol Dual-band
790 ... 960 MHz	XPol
790 ... 960 MHz	XXPol
790 ... 960 MHz 1710 ... 2170 MHz	VPol
1710 ... 2690 MHz	XPol
1710 ... 2690 MHz	XXPol 2-Multi-band
790 ... 960 MHz 1710 ... 2690 MHz	XXPol Dual-band
790 ... 960 MHz 1710 ... 2690 MHz	XXXPol
790 ... 960 MHz 1710 ... 2690 MHz	XXXXPol
Omni	VPol
Indoor	VPol, VXPoI, VHPoI
RET	Remote Electrical Tilt-System
Electrical Accessories	Splitters, Tappers and Measurement Tools
Mechanical Accessories	Clamps, Downtilt Kits, ...

Summary of Antenna Types, RET-Products and Accessories

The articles are listed by type number in numerical order. **New or changed product.**

Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page
730...		736...		739619	34	742235v01	98
730376v02	59	736347	158	739620	34	742236v01	95
730378v02	60	736349	159			742237	94
730382	61	736350	155	741...		742263	216
		736854	60	741573	173	742264v02	107
				741790	164	742265v02	110
731...		737...		741984v01	82	742266v02	115
731651	207	737398	218	741988v01	82	742270v03	129
		737971	209	741989v01	83	742271v03	132
		737972	209	741990v01	83	742272v03	136
732...		737973	209			742290	63
732317	208	737974	209	742...		742317	216
732318	208	737975	209	742033	212	742351v01	66
732321	208	737977	209	742034	212	742352v01	101
732322	208	737978	209	742113	214		
732327	208			742192v01	58	800100..	
		738...		742196v01	69	80010046	63
		738187	163	742210v01	68		
734...		738192	157	742213v01	77	800101..	
734360	216	738440	220	742214v01	73	80010111	162
734361	216	738445	57	742215v01	74	80010121v01	120
734362	216	738446	57	742218v01	67	80010122v01	121
734363	216	738449	176	742219v01	67	80010123v03	122
734364	216	738450	152	742222v01	106	80010147	178
734365	216	738546	207	742223v02	108		
		738908	217	742224v02	113	800102..	
				742225v02	119	80010202v02	35
735...		739...		742226v01	105	80010203v02	36
735727	56	739489v01	68	742233v01	92	80010204v02	38

Summary of Antenna Types, RET-Products and Accessories

The articles are listed by type number in numerical order. **New or changed product.**

Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page
80010207v01	35	80010426v01	72	80010622	96	80010698	127
80010208v01	39	80010428v01	73	80010634v01	37	80010699	128
80010215v01	39	80010430	174	80010636	79		
80010217v01	42	80010431	177	80010642	32		
80010247v01	70	80010439v01	81	80010643	32	800107..	
80010249	172	80010442	165	80010644	95	80010709	175
80010251v01	66	80010454v01	104	80010647v01	50	80010721v01	26
80010274	161	80010456v02	33	80010651	80	80010722v01	27
80010290v01	131	80010465	168	80010652	99	80010723v01	28
80010291v02	134	80010485v01	112	80010664	109	80010734v01	20
80010292v03	138	80010486v01	118	80010665	114	80010735v01	21
80010294v02	37	80010492v01	139	80010666	117	80010736v01	22
				80010667	46	80010744	94
800103..				80010668	47	80010747	160
80010300v01	43	800105..		80010669	48	80010748	170
80010303v02	36	80010504v01	75	80010670v01	130	80010749	171
80010305v02	38	80010505v01	78	80010671v01	133	80010761	69
80010306v02	40	80010510v01	97	80010672v01	137	80010764v01	23
80010307v01	40	80010511v01	100	80010674	140	80010765v01	24
80010308v01	41	80010516v01	49	80010675	141	80010766v01	25
80010309v01	41	80010517v01	51	80010676	142	80010771	111
80010310v01	42			80010677	169	80010772	116
80010360	88			80010681	71		
80010368	62	800106..		80010682	93		
80010375	87	80010605	84	80010685	149	800108..	
80010378	81	80010606v01	85	80010686	150	80010805	148
		80010614v01	74	80010691	143	80010816	52
800104..		80010618v01	86	80010692	135	80010817	53
80010425V01	72	80010621v01	76	80010697	126	80010825	146

Summary of Antenna Types, RET-Products and Accessories

The articles are listed by type number in numerical order. **New or changed product.**

Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page
80010826	147	86010012	185	86010149	29		
80010850	156	86010013	185	86010150	194		
		86010014	185	86010151	194		
		86010015	185	86010152	194		
850...		86010017	191				
85010002	207	86010018	191				
85010003	207	86010019	191	K61...			
85010005	221	86010023	195	K61335	219		
85010006	215	86010026	183				
85010008	210	86010029	185				
85010010	89	86010030	187	K63...			
85010014	211	86010031	188	K63236001	195		
85010015	211	86010032	185				
85010016	211	86010033	185				
85010017	211	86010046	184	K75...			
85010058	212	86010054	185	K751161	153		
85010059	212	86010100	192	K7515641	154		
85010060	213	86010101	192				
85010061	213	86010102	192				
		86010103	192				
		86010104	192				
860...		86010105	192				
86010002	186	86010130	190				
86010006	183	86010131	190				
86010007	185	86010136	193				
86010008	185	86010137	193				
86010009	185	86010138	193				
86010010	185	86010147	182				
86010011	185	86010148	182				

Removed from the 2012 catalogue	Status
698–894 MHz XPol / 1710–2170 MHz XXPoI	
80010734 iRCU AISG 1.1	80010734v01 iRCU AISG 2.0
80010735 iRCU AISG 1.1	80010735v01 iRCU AISG 2.0
80010736 iRCU AISG 1.1	80010736v01 iRCU AISG 2.0
698–894 MHz XPol	
80010764 iRCU AISG 1.1	80010764v01 iRCU AISG 2.0
80010765 iRCU AISG 1.1	80010765v01 iRCU AISG 2.0
80010766 iRCU AISG 1.1	80010766v01 iRCU AISG 2.0
790 ... 960 MHz XPol	
80010141	Replaced by 80010642
80010214v01	Available on request until end of 2012
80010218v01	Available on request until end of 2012
80010518v01	Available on request till end of 2012 / replaced by 80010817
790 ... 960 MHz VPol / 1710 ... 2170 MHz VPol	
80010658	Phased out
730677	Available on request until end of 2012
730368	Available on request until end of 2012
730691	Available on request until end of 2012
730376v01	730376v02
730378v01	730378v02
1710 ... 2690 MHz XPol	
741623	Available on request until end of 2012
742186v01	Available on request until end of 2012
739710	Available on request until end of 2012
80010314	Available on request until end of 2012
790 ... 960 MHz / 1710 ... 2690 MHz XXPoI Dual-band	
741327	Available on request until end of 2012
741322	Available on request until end of 2012
742047v01	Available on request until end of 2012
790 ... 960 MHz / 1710 ... 2690 MHz XXXPoI	
80010292v02	80010292v03
80010670v01	Available on request until end of 2012
80010671v01	Available on request until end of 2012
80010672v01	Available on request until end of 2012
Indoor VPol	
80010433	Available on request until end of 2012
736854	Available on request until end of 2012
RET	
86010140	
86010141	
86010145	iRCU – Replaced by 86010149

Please note, new type numbers in the catalogue 2012 are shown and coloured in the respective register of the different antenna families.

Antenna Designs:
Antenna Families
Harmony of Design and Technology

KATHREIN
Antennen · Electronic



Directional Antenna Designs: Special Directional Antennas For Particular Applications


KATHREIN
Antennen · Electronic

Antennas for

- tunnel use
- railway use
- micro cells (street use)
- high gain link for repeaters

The distinguishing features of these special versions, e.g. parabolic panels or log. periodic antennas, are:

- very small half-power beam width (high gain)
- high sidelobe suppression
- also Dual-band and Multi-band versions
- bidirectional horizontal pattern.

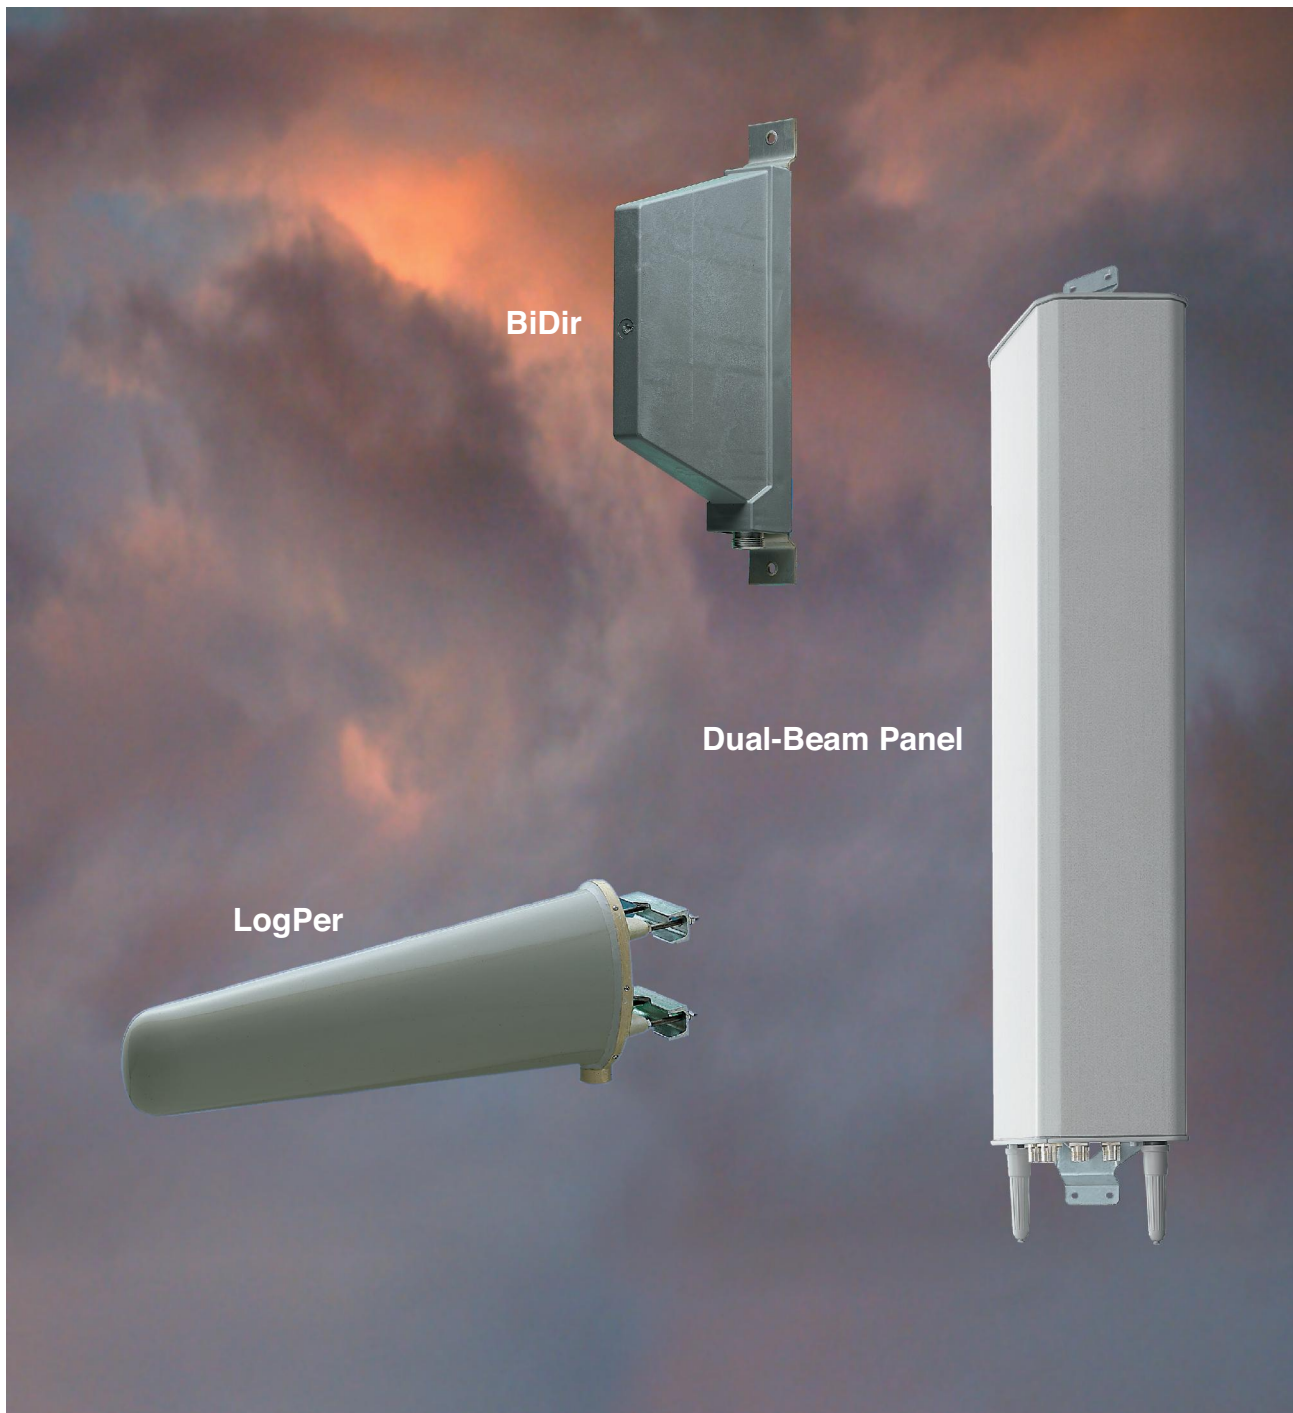



Faini Telecommunication Systems is an Italian Company originated in 1995 as an outsource, with the name of Faini Antenne s.r.l., of the Antenna Division of the former Siemens Telecomunicazioni.

Since March 2007 Faini Telecommunication Systems is a member of the worldwide known German Kathrein Group.

The Company is located in Milano area nearby the major microwave and mobile network system Radio manufacturers and is specialized in the design and fabrication of a full range of Antennas for Point to Point (PTP) and Point to Multi Point Radio Links as well as for special custom oriented applications.

In-house capabilities offer design services for special versions of antennas to be integrated to the Customer Radio Equipment according to their needs.


For further information, please contact:

Faini Telecommunication Systems S.r.l.

Via Firenze, 11
20063 Cernusco s/n (MI) – Italy

Tel. +39 02 929042.1
Fax.+39 02 929042.219

<http://fainitelecommunication.com>
info@fainitelecommunication.com

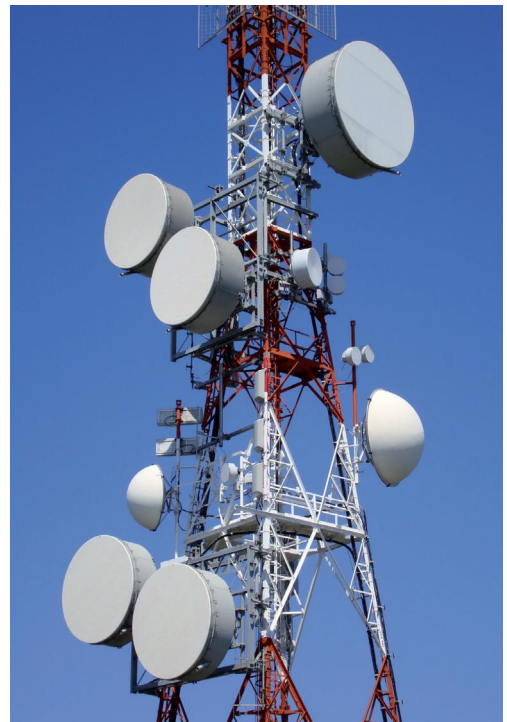

Microwave Antennas and Couplers

Antenna Designs:

Antenna Families / RET-system

Distinguishing features

Design	Compact size and elegant design are the distinguishing features of Kathrein's antenna families.
Radome	The radomes cover the internal antenna components. The fiberglass material guarantees optimum performance with regards to stability, strength, UV resistance, painting and weather protection.
Environmental influences	Kathrein antenna designs are based on fundamental engineering knowledge and also on our decades of practical experience, during which the various constructions and materials used have proved their outstanding reliability.
Environmental conditions	Kathrein cellular antennas are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E. The antennas exceed this standard with regards to the following items: – Low temperature: –55 °C – High temperature (dry): +60 °C
Impedance	Standard Impedance for all products is 50 Ω unless otherwise stated.
Great variety of half-power beam width, gain values, electrical downtilt	According to the antenna type selected, customer can choose from different half-power beam widths. Gain values up to 22.5 dBi and electrical downtilts up to 15° for panel antennas are available. Downtilts are either fixed or adjustable or even controlled by remote electrical tilt system (RET).
Low intermodulation products (typically –150 dBc)	After many years of experience in the construction of antennas and after intensive research into the effects of intermodulation, we have been able to optimize the material and technology used for antennas (the given value refers to 3rd order products measured with 2 carriers of 20 W each).
Excellent tracking	Tracking states the symmetry between the +45° and –45° polarized horizontal pattern. Bad tracking values lead to interferences in the network and reduced diversity performance. Kathreins special Tracking compensation reduces the average value measured at $\pm 60^\circ$ to < 2 dB.
Superior squint	Squint, also often referred to as "Pattern Symmetry", gives the symmetry of the pattern over the whole frequency range measured at the 3 dB points. Interferences and nulls in the network may be the result of bad values. In contrast to the vertical squint which is usually good, excellent squint values of the horizontal pattern are hard to reach. Kathreins superior values of $\pm 5\%$ of the half-power beam width are in line with the requirements from system suppliers.
Multi-band design	Depending on antenna family broad-band, multi-band, dual-band and triple-band versions can be offered. Therefore the variety of antennas used can be kept to a minimum.
Excellent grounding	The antennas are DC grounded according EN 50083-1.
Multi-functional installation hardware	Depending on the type, the antennas are equipped with up to 2 attachment points. Panels can be wall-mounted without any additional hardware. For mast-mounting, brackets and mechanical downtilt kits are available. To assist the installation technicians in aligning the panels, an azimuth adjustment tool can be supplied (see Mechanical Accessories).
MTBF Statement	Traditionally passive components like antennas cannot be well calculated due to the lack of a sufficient number of components in the MTBF library. Unfortunately this constraint results in a very inaccurate calculation. Thus such results are technically questionable and unrealistic. In essence, antennas are made out of mechanical parts that do not show any failure rates. Only available failure rates can be calculated into an MTBF value. Consequently such components cannot be listed in any MTBF library.
Remote Electrical Tilt System AISG Compliancy	Kathrein hereby states that RET devices, as far as the functionality and features are described within the AISG / 3 GPP standard, are compliant with the standard.


Downtilting of Antennas: Downtilt Possibilities

Mechanical downtilt


For further technical information please see “Mechanical Accessories”, page 205.

Electrical downtilt

Description of the adjustment mechanism (protective cap removed):

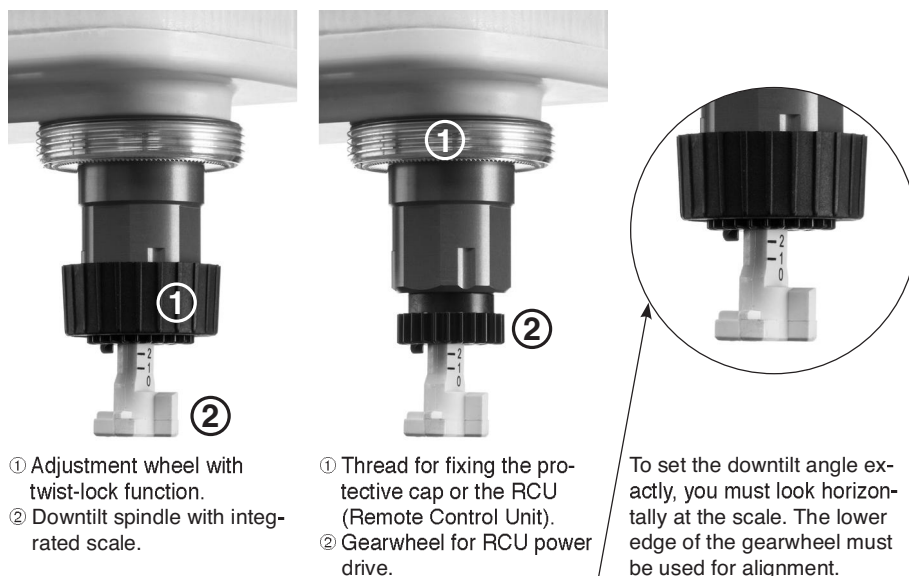


Manual adjustment procedure:

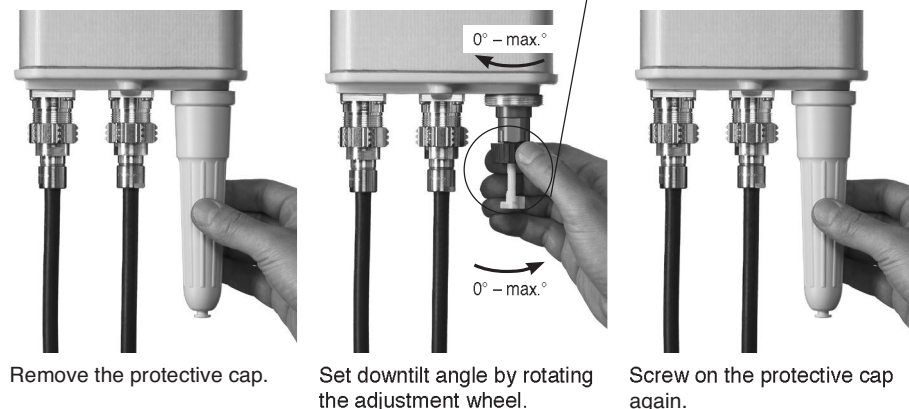

Remote Electrical Tilt (RET) For further technical information please see “RET”, pages 180 and 181.







Description of bottom end cap (exemplary picture):

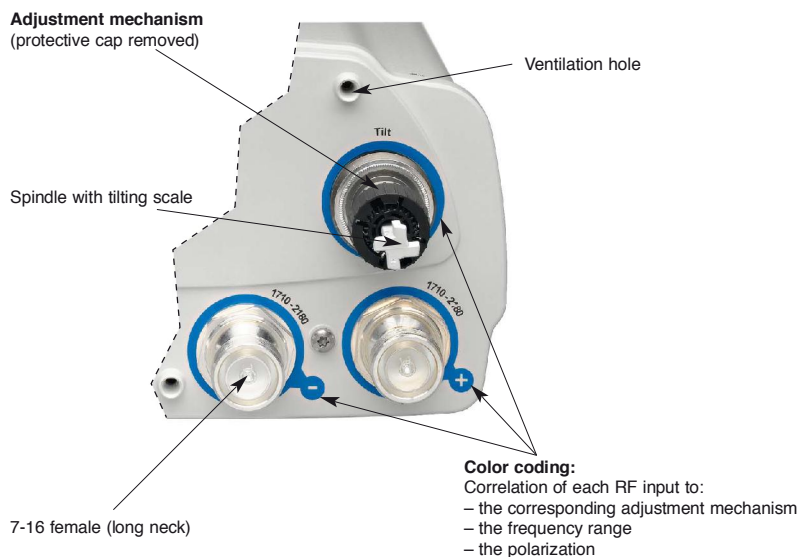







XXPol Panel 870–960/1710–1880 C 65°/60° 17/18dBi 2°–8°T/2°T

Polarization(s):	
(X) Dual +45°/–45°	
(V) Vertical	
Antenna Family	
Frequency Range(s)	
Integrated Combiner	
Horizontal	
Half-power Beam Width(s)	
Gain Value(s)	
Variable / Fixed Electrical Tilt(s)	

Horizontal Patterns:

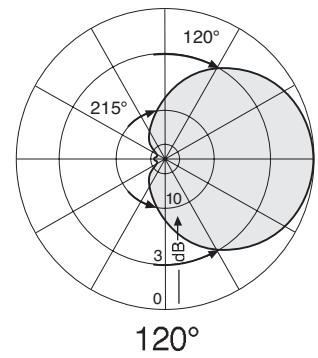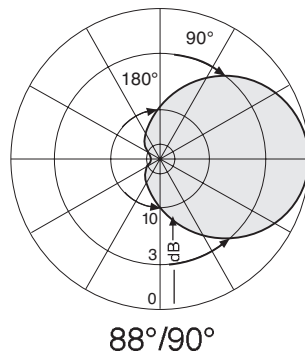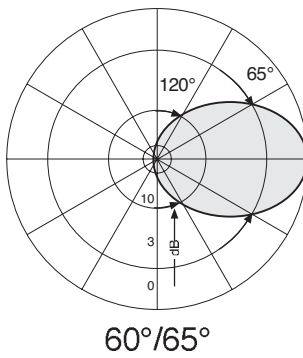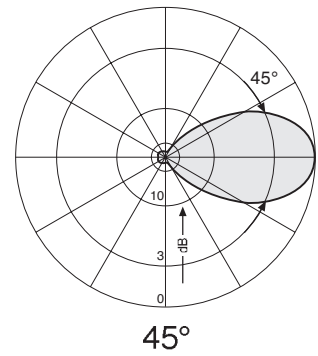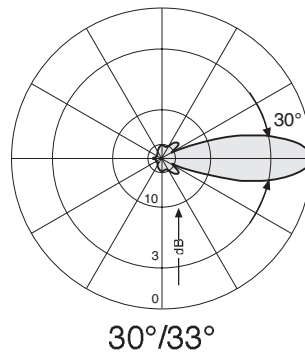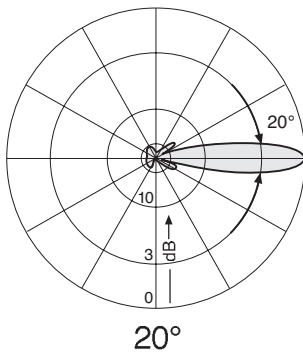

Vertical Patterns:

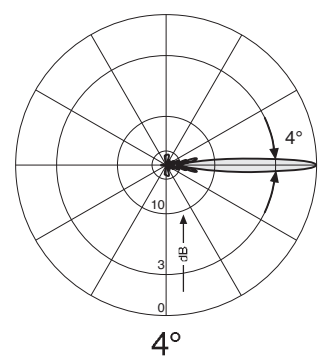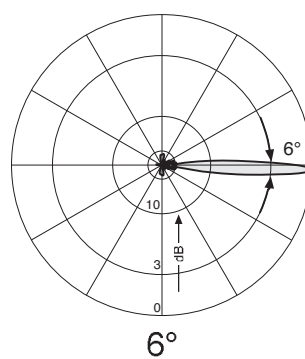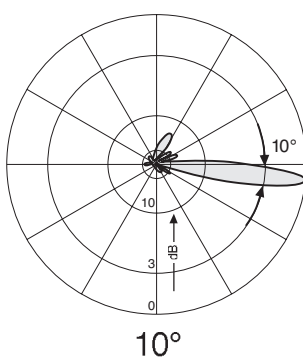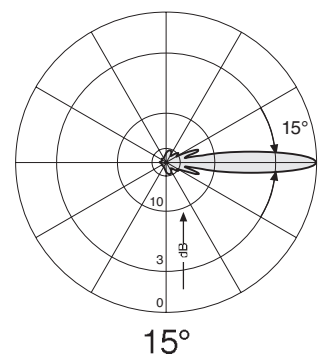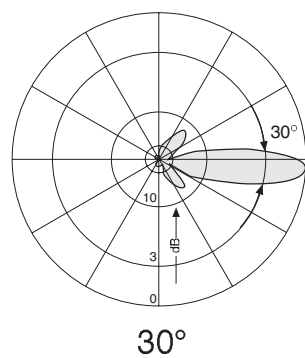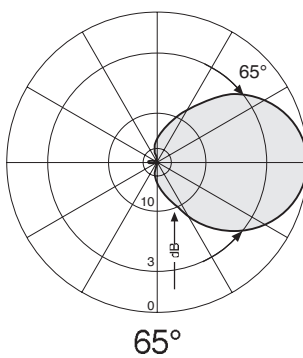

Summary – Directional Antennas

Dual Polarization +45°/–45°

700/800 / 700/1800–2000

XPol – 700/800

Type					Type No.	Height [mm]	Connector position	Page
XPol Panel iRCU	698–894	65°	15dBi	0°–16°T	80010734v01	1355	bottom	20
XPol Panel iRCU	698–894	65°	16dBi	0°–10°T	80010735v01	1934	bottom	21
XPol Panel iRCU	698–894	65°	17dBi	0°–10°T	80010736v01	2438	bottom	22

XXPol – 700/1800–2000

XXPol Panel iRCU	698–894	65°	15dBi	0°–16°T	80010764v01	1403	bottom	23
	1710–2170	65°	17.5dBi	0°–10°T				
XXPol Panel iRCU	698–894	65°	16dBi	0°–10°T	80010765v01	1918	bottom	24
	1710–2170	65°	18.5dBi	0°–10°T				
XXPol Panel iRCU	698–894	65°	17dBi	0°–10°T	80010766v01	2438	bottom	25
	1710–2170	65°	18.5dBi	0°–10°T				
XXPol Panel iRCU	698–894	85°	14dBi	0°–16°T	80010721v01	1394	bottom	26
	1710–2170	85°	16.5dBi	0°–10°T				
XXPol Panel iRCU	698–894	85°	15dBi	0°–10°T	80010722v01	1828	bottom	27
	1710–2170	85°	17.5dBi	0°–10°T				
XXPol Panel iRCU	698–894	85°	16dBi	0°–10°T	80010723v01	2368	bottom	28
	1710–2170	85°	17.5dBi	0°–10°T				

New or changed product

iRCU specifications (86010149) see page 29

Multi-band Panel


Dual Polarization**Half-power Beam Width****Integrated replaceable Remote Control Unit****Adjustable Electrical Downtilt****698–894****X****65°****iRCU****0°–16°****KATHREIN**

Antennen · Electronic



XPol Panel iRCU 698–894 65° 15dBi 0°–16°T

Type No.	80010734v01		clamps included
A) Antenna specifications			
	698–894		
Frequency range	698 – 806 MHz	824 – 894 MHz	
Polarization	+45°, –45°	+45°, –45°	
Gain	12.05 dBd / 14.2 dBi	12.65 dBd / 14.8 dBi	
Horizontal Pattern:			
Half-power beam width	68°	65°	
Front-to-back ratio	Copolar: > 30 dB Average: 32 dB	Copolar: > 30 dB Average: 33 dB	
Cross polar ratio			
Maindirection 0°	Typically: > 24 dB	Typically: > 23 dB	
Sector ±60°	> 10 dB, Avg. 15 dB	> 10 dB, Avg. 16 dB	
Vertical Pattern:			
Half-power beam width	16°	14.8°	
Electrical tilt	0°–16°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam:	0° ... 8° ... 16° T 16 ... 17 ... 17 dB	0° ... 8° ... 16° T 18 ... 17 ... 16 dB	
Average:	16 ... 19 ... 20 dB	20 ... 20 ... 20 dB	
Impedance	50 Ω		
VSWR	< 1.5		
Isolation, between ports	> 30 dB		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	500 W (at 50 °C ambient temperature)		
Input	2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female		
Connector position	Bottom		
Wind load	Frontal: 620 N (at 150 km/h) Lateral: 200 N (at 150 km/h) Rearside: 710 N (at 150 km/h)	1550 N (at 150 mph) 500 N (at 150 mph) 1770 N (at 150 mph)	
Max. wind velocity	241 km/h (150 mph)		
Height/width/depth	1355 / 303 / 99 mm (53.3 / 11.9 / 3.9 inches)		
Category of mounting hardware	M (Medium)		
Weight	11 kg (24 lbs) / 13 kg (27 lbs) (clamps incl.)		
Packing size	1430 x 315 x 115 mm (56.3 x 12.4 x 4.5 inches)		
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter		

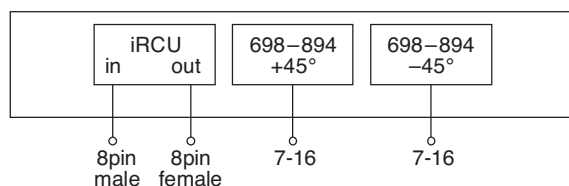**iRCU specifications (86010149) see page 29**

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

X

65°

iRCU

0°–10°

KATHREIN

Antennen · Electronic




XPol Panel iRCU 698–894 65° 16dBi 0°–10°T

Type No.	80010735v01		clamps included
A) Antenna specifications			
	698–894		
Frequency range	698 – 806 MHz	824 – 894 MHz	
Polarization	+45°, –45°	+45°, –45°	
Gain	13.35 dBd / 15.5 dBi	13.85 dBd / 16 dBi	
Horizontal Pattern:			
Half-power beam width	67°	65°	
Front-to-back ratio	Copolar: > 30 dB Average: 35 dB	Copolar: > 30 dB Average: 35 dB	
Cross polar ratio			
Maindirection 0°	Typically: > 25 dB	Typically: > 25 dB	
Sector ±60°	> 11 dB, Avg. 15 dB	> 11 dB, Avg. 15 dB	
Vertical Pattern:			
Half-power beam width	11.3°	10°	
Electrical tilt	0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam:	0° ... 5° ... 10° T 16 ... 17 ... 17 dB	0° ... 5° ... 10° T 18 ... 17 ... 16 dB	
Average:	16 ... 19 ... 20 dB	20 ... 20 ... 20 dB	
Impedance	50 Ω		
VSWR	< 1.5		
Isolation, between ports	> 30 dB		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	500 W (at 50 °C ambient temperature)		
Input	2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female		
Connector position	Bottom		
Wind load	Frontal: 900 N (at 150 km/h) Lateral: 310 N (at 150 km/h) Rearside: 1030 N (at 150 km/h)	2260 N (at 150 mph) 760 N (at 150 mph) 2580 N (at 150 mph)	
Max. wind velocity	241 km/h (150 mph)		
Height/width/depth	1934 / 303 / 99 mm (76.1 / 11.9 / 3.9 inches)		
Category of mounting hardware	H (Heavy)		
Weight	13 kg (28.7 lbs) / 15 kg (33 lbs) (clamps incl.)		
Packing size	2060 x 315 x 115 mm (81.1 x 12.4 x 4.5 inches)		
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter		



iRCU specifications (86010149) see page 29

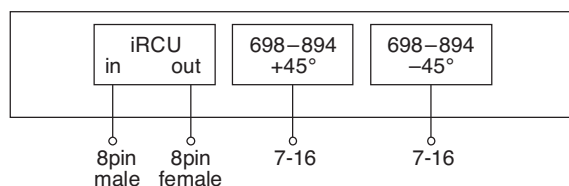

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

X

65°

iRCU

0°–10°

KATHREIN


Antennen · Electronic



XPol Panel iRCU 698–894 65° 17dBi 0°–10°

Type No.	80010736v01		clamps included
A) Antenna specifications			
	698–894		
Frequency range	698 – 806 MHz	824 – 894 MHz	
Polarization	+45°, –45°	+45°, –45°	
Gain	14.25 dBd / 16.4 dBi	14.85 dBd / 17 dBi	
Horizontal Pattern:			
Half-power beam width	67°	68°	
Front-to-back ratio	Copolar: > 30 dB Average: 35 dB	Copolar: > 30 dB Average: 35 dB	
Cross polar ratio			
Maindirection 0°	Typically: > 25 dB	Typically: > 20 dB	
Sector ±60°	> 11 dB, Avg. 15 dB	> 11 dB, Avg. 15 dB	
Vertical Pattern:			
Half-power beam width	9.5°	8.6°	
Electrical tilt	0.5°–9.5°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam:	0.5° ... 5° ... 9.5° T 16 ... 16 ... 16 dB	0.5° ... 5° ... 9.5° T 18 ... 18 ... 17 dB	
Average:	18 ... 18 ... 17 dB	20 ... 20 ... 20 dB	
Impedance	50 Ω		
VSWR	< 1.5		
Isolation, between ports	> 30 dB		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	500 W (at 50 °C ambient temperature)		
Input	2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female		
Connector position	Bottom		
Wind load	Frontal: 1160 N (at 150 km/h) Lateral: 390 N (at 150 km/h) Rearside: 1380 N (at 150 km/h)	2900 N (at 150 mph) 970 N (at 150 mph) 3450 N (at 150 mph)	
Max. wind velocity	241 km/h (150 mph)		
Height/width/depth	2438 / 303 / 99 mm (96 / 11.9 / 3.9 inches)		
Category of mounting hardware	H (Heavy)		
Weight	16.7 kg (36.8 lbs) / 18.5 kg (40.8 lbs) (clamps incl.)		
Packing size	2600 x 315 x 115 mm (102.4 x 12.4 x 4.5 inches)		
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter		

iRCU specifications (86010149) see page 29

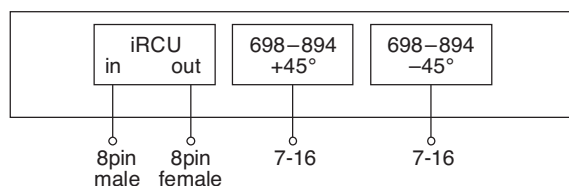

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

KATHREIN

Antennen · Electronic

X

X

65°

65°

iRCU

iRCU

0°–16°

0°–10°




XXPol Panel iRCU 698–894/1710–2170 65°/65° 15/17.5dBi 0°–16°/0°–10°T

Type No.	80010764v01				clamps included
A) Antenna specifications					
	698–894		1710–2170		
Frequency range	698 – 806 MHz	824 – 894 MHz	1710 – 1755 MHz 2110 – 2170 MHz	1850 – 1990 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	12.15 dBd / 14.3 dBi	12.65 dBd / 14.8 dBi	17.3 dBi	17.5 dBi	
Horizontal Pattern:					
Half-power beam width	68°	65°	61°	60°	
Front-to-back ratio	Copolar: > 30 dB Average: 32 dB	Copolar: > 27 dB Average: 30 dB	Copolar: > 30 dB Average: 34 dB	Copolar: > 30 dB Average: 34 dB	
Cross polar ratio					
Main direction	0°				
Sector	±60°				
	Typically: > 25 dB > 10 dB, Avg. 15 dB	Typically: > 25 dB > 8 dB, Avg. 14 dB	Typically: > 25 dB > 8 dB, Avg. 14 dB	Typically: > 25 dB > 10 dB, Avg. 16 dB	
Tracking, Avg.	1.5 dB	1.5 dB	2.0 dB	1.0 dB	
Squint	±2.5°	±4.0°	±4.0°	±1.5°	
Vertical Pattern:					
Half-power beam width	15°	13.5°	7.5°	7.5°	
Electrical tilt	0°–16°, continuously adjustable		0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam: Average:	0° ... 8° ... 16° T 17 ... 16 ... 16 dB 19 ... 19 ... 18 dB	0° ... 8° ... 16° T 18 ... 16 ... 16 dB 22 ... 20 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 17 dB 20 ... 20 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 17 dB 20 ... 20 ... 20 dB	
Impedance	50 Ω				
VSWR	< 1.5				
Isolation, between ports	Intrasystem: > 30 dB, Intersystem: > 35 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	500 W (at 50 °C ambient temperature)		300 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female (long neck) iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female				
Connector position	Bottom				
Wind load	Frontal: 690 N (at 150 km/h) 1710 N (at 150 mph) Lateral: 260 N (at 150 km/h) 640 N (at 150 mph) Rearside: 710 N (at 150 km/h) 1770 N (at 150 mph)				
Max. wind velocity	241 km/h (150 mph)				
Height/width/depth	1403 / 300 / 152 mm (55.2 / 11.8 / 6 inches)				
Category of mounting hardware	M (Medium)				
Weight	18.5 kg (40.8 lbs) / 20.5 kg (45.2 lbs) (clamps incl.)				
Packing size	1646 x 322 x 190 mm (64.8 x 12.7 x 7.5 inches)				
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter				



iRCU specifications (86010149) see page 29

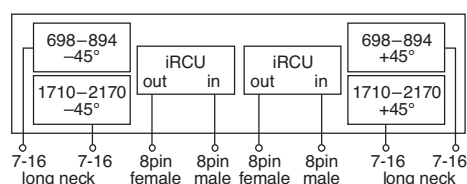

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

X

X

65°

65°

iRCU

iRCU

0°–10°

0°–10°

KATHREIN


Antennen · Electronic



XXPol Panel iRCU 698–894/1710–2170 65°/65° 16/18.5dBi 0°–10°/0°–10°T

Type No.	80010765v01				clamps included
A) Antenna specifications					
	698–894		1710–2170		
Frequency range	698 – 806 MHz	824 – 894 MHz	1710 – 1755 MHz 2110 – 2170 MHz	1850 – 1990 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	13.15 dBd / 15.3 dBi	13.65 dBd / 15.8 dBi	18 dBi	18.5 dBi	
Horizontal Pattern:					
Half-power beam width	68°	65°	63°	62°	
Front-to-back ratio	Copolar: > 30 dB Average: 34 dB	Copolar: > 30 dB Average: 34 dB	Copolar: > 27 dB Average: 34 dB	Copolar: > 27 dB Average: 34 dB	
Cross polar ratio					
Main direction	0°	Typically: > 25 dB	Typically: > 20 dB	Typically: > 25 dB	Typically: > 30 dB
Sector	±60°	> 10 dB, Avg. 16 dB	> 10 dB, Avg. 14 dB	> 8 dB, Avg. 15 dB	> 10 dB, Avg. 15 dB
Tracking, Avg.		1.0 dB	1.5 dB	1.5 dB	1.0 dB
Squint		±2.5°	±3.0°	±3.0°	±2.5°
Vertical Pattern:					
Half-power beam width	11.8°	10.8°	5.8°	5.8°	
Electrical tilt	0°–10°, continuously adjustable		0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam: Average:	0° ... 5° ... 10° T 16 ... 16 ... 18 dB 18 ... 20 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB 20 ... 22 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB 20 ... 22 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB 20 ... 22 ... 20 dB	
Impedance	50 Ω				
VSWR	< 1.5				
Isolation, between ports	Intrasystem: > 30 dB, Intersystem: > 35 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	500 W (at 50 °C ambient temperature)		300 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female				
Connector position	Bottom				
Wind load		Frontal: 950 N (at 150 km/h) Lateral: 360 N (at 150 km/h) Rearside: 980 N (at 150 km/h)	2380 N (at 150 mph) 890 N (at 150 mph) 2460 N (at 150 mph)		
Max. wind velocity	241 km/h (150 mph)				
Height/width/depth	1918 / 300 / 152 mm (75.5 / 11.8 / 6.0 inches)				
Category of mounting hardware	H (Heavy)				
Weight	23.5 kg (51.8 lbs) / 25.5 kg (56.2 lbs) (clamps incl.)				
Packing size	2166 x 322 x 190 mm (85.3 x 12.7 x 7.5 inches)				
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter				

iRCU specifications (86010149) see page 29

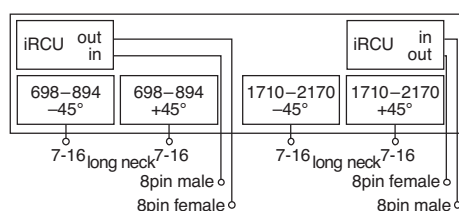

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

KATHREIN

Antennen · Electronic

X

X

65°

65°

iRCU

iRCU

0°–10°


0°–10°



XXPoI Panel iRCU 698–894/1710–2170 65°/65° 17/18.5dBi 0°–10°/0°–10°T

Type No.	80010766v01				clamps included
A) Antenna specifications					
	698–894		1710–2170		
Frequency range	698 – 806 MHz	824 – 894 MHz	1710 – 1755 MHz 2110 – 2170 MHz	1850 – 1990 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	14.25 dBd / 16.4 dBi	14.65 dBd / 16.8 dBi	18 dBi	18.5 dBi	
Horizontal Pattern:					
Half-power beam width	68°	65°	63°	62°	
Front-to-back ratio	Copolar: > 30 dB Average: 34 dB	Copolar: > 30 dB Average: 34 dB	Copolar: > 27 dB Average: 34 dB	Copolar: > 27 dB Average: 34 dB	
Cross polar ratio					
Maindirection	0°				
Sector	±60°	Typically: > 25 dB > 10 dB, Avg. 15 dB	Typically: > 20 dB > 10 dB, Avg. 12 dB	Typically: > 25 dB > 8 dB, Avg. 15 dB	Typically: > 30 dB > 10 dB, Avg. 15 dB
Tracking, Avg.	1.0 dB		1.5 dB		
Squint	±2.5°		±3.0°		
Vertical Pattern:					
Half-power beam width	9.5°	8.7°	5.8°	5.8°	
Electrical tilt	0°–10°, continuously adjustable		0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam:	0° ... 5° ... 10° T 16 ... 16 ... 16 dB Average: 18 ... 20 ... 18 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB Average: 20 ... 20 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB Average: 20 ... 22 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB Average: 20 ... 22 ... 20 dB	
Impedance	50 Ω				
VSWR	< 1.5				
Isolation, between ports	Intrasystem: > 30 dB, Intersystem: > 35 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	500 W (at 50 °C ambient temperature)		300 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female (long neck) iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female				
Connector position	Bottom				
Wind load	Frontal: 1270 N (at 150 km/h) 3170 N (at 150 mph) Lateral: 470 N (at 150 km/h) 1160 N (at 150 mph) Rearside: 1320 N (at 150 km/h) 3310 N (at 150 mph)				
Max. wind velocity	241 km/h (150 mph)				
Height/width/depth	2438 / 300 / 152 mm (96 / 11.8 / 6.0 inches)				
Category of mounting hardware	H (Heavy)				
Weight	26.5 kg (58.3 lbs) / 28.5 kg (62.7 lbs) (clamps incl.)				
Packing size	2656 x 320 x 190 mm (99.88 x 12.6 x 7.5 inches)				
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter				

iRCU specifications (86010149) see page 29

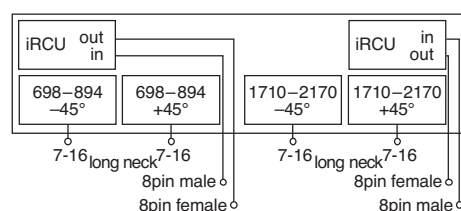

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

X

X

85°

85°

iRCU

iRCU

0°–16°

0°–10°

KATHREIN

Antennen · Electronic




XXPol Panel iRCU 698–894/1710–2170 85°/85° 14/16.5dBi 0°–16°/0°–10°T

Type No.	80010721v01				clamps included
A) Antenna specifications					
	698–894		1710–2170		
Frequency range	698 – 806 MHz	824 – 894 MHz	1710 – 1755 MHz 2110 – 2170 MHz	1850 – 1990 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	11.35 dBd / 13.5 dBi	11.85 dBd / 14 dBi	16.5 dBi	16.5 dBi	
Horizontal Pattern:					
Half-power beam width	85°	85°	88°	85°	
Front-to-back ratio	Copolar: > 25 dB Average: 32 dB	Copolar: > 25 dB Average: 28 dB	Copolar: > 25 dB Average: 26 dB	Copolar: > 25 dB Average: 27 dB	
Cross polar ratio					
Maindirection	0°				
Sector	±60°				
	Typically: > 20 dB > 10 dB, Avg. 14 dB	Typically: > 22 dB > 10 dB, Avg. 15 dB	Typically: > 15 dB > 10 dB, Avg. 12 dB	Typically: > 15 dB > 8 dB, Avg. 12 dB	
Tracking, Avg.	1.5 dB		0.5 dB		
Squint	±4.5°		±4.0°		
Vertical Pattern:					
Half-power beam width	16.5°	15.1°	6.7°	6.7°	
Electrical tilt	0°–16°, continuously adjustable		0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam:	0° ... 8° ... 16° T 18 ... 16 ... 18 dB 20 ... 19 ... 19 dB	0° ... 8° ... 16° T 18 ... 18 ... 17 dB 22 ... 20 ... 20 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB 22 ... 22 ... 19 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB 22 ... 22 ... 22 dB	
Average:					
Impedance	50 Ω				
VSWR	< 1.5				
Isolation, between ports	Intrasystem: > 30 dB, Intersystem: > 35 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	500 W (at 50 °C ambient temperature)		300 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female				
Connector position	Bottom				
Wind load	Frontal:	670 N (at 150 km/h)	1680 N (at 150 mph)		
	Lateral:	250 N (at 150 km/h)	610 N (at 150 mph)		
	Rearside:	700 N (at 150 km/h)	1740 N (at 150 mph)		
Max. wind velocity	241 km/h (150 mph)				
Height/width/depth	1394 / 300 / 152 mm (54.9 / 11.8 / 6.0 inches)				
Category of mounting hardware	M (Medium)				
Weight	21 kg (46.2 lbs) / 23 kg (50.6 lbs) (clamps incl.)				
Packing size	1616 x 322 x 190 mm (63.6 x 12.6 x 7.5 inches)				
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter				



iRCU specifications (86010149) see page 29

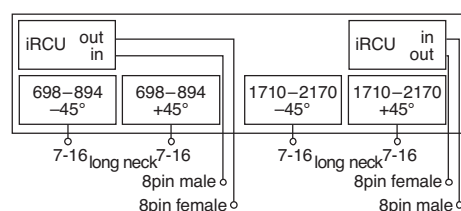

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

KATHREIN

Antennen · Electronic

X

X

85°

85°

iRCU

iRCU

0°–10°


0°–10°



XXPoI Panel iRCU 698–894/1710–2170 85°/85° 15/17.5dBi 0°–10°/0°–10°T

Type No.	80010722v01				clamps included
A) Antenna specifications					
	698–894		1710–2170		
Frequency range	698 – 806 MHz	824 – 894 MHz	1710 – 1755 MHz 2110 – 2170 MHz	1850 – 1990 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	12.5 dBd / 14.65 dBi	13 dBd / 15.15 dBi	17 dBi	17.5 dBi	
Horizontal Pattern:					
Half-power beam width	85°	85°	85°	85°	
Front-to-back ratio	Copolar: > 28 dB Average: 31 dB	Copolar: > 27 dB Average: 29 dB	Copolar: > 25 dB Average: 28 dB	Copolar: > 25 dB Average: 28 dB	
Cross polar ratio					
Main direction	0°				
Sector	±60°				
	Typically: > 22 dB > 10 dB, Avg. 16 dB	Typically: > 24 dB > 10 dB, Avg. 16 dB	Typically: > 18 dB > 10 dB, Avg. 12 dB	Typically: > 18 dB > 8 dB, Avg. 12 dB	
Tracking, Avg.	0.5 dB		0.5 dB		
Squint	±4.0°		±4.5°		
Vertical Pattern:					
Half-power beam width	12.1°	11°	5.5°	5.5°	
Electrical tilt	0°–10°, continuously adjustable		0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam: Average:	0° ... 5° ... 10° T 16 ... 16 ... 18 dB 17 ... 19 ... 21 dB	0° ... 5° ... 10° T 15 ... 18 ... 18 dB 16 ... 19 ... 22 dB	0° ... 5° ... 10° T 16 ... 16 ... 16 dB 18 ... 18 ... 18 dB	0° ... 5° ... 10° T 16 ... 16 ... 16 dB 17 ... 17 ... 18 dB	
Impedance	50 Ω				
VSWR	< 1.5				
Isolation, between ports	Intrasystem: > 30 dB, Intersystem: > 35 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	500 W (at 50 °C ambient temperature)		300 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female				
Connector position	Bottom				
Wind load	Frontal: 900 N (at 150 km/h) 2260 N (at 150 mph) Lateral: 330 N (at 150 km/h) 830 N (at 150 mph) Rearside: 940 N (at 150 km/h) 2350 N (at 150 mph)				
Max. wind velocity	241 km/h (150 mph)				
Height/width/depth	1828 / 300 / 152 mm (71.9 / 11.8 / 6.0 inches)				
Category of mounting hardware	H (Heavy)				
Weight	26 kg (57.3 lbs) / 28 kg (61.7 lbs) (clamps incl.)				
Packing size	2050 x 322 x 190 mm (80.7 x 12.6 x 7.5 inches)				
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter				

iRCU specifications (86010149) see page 29

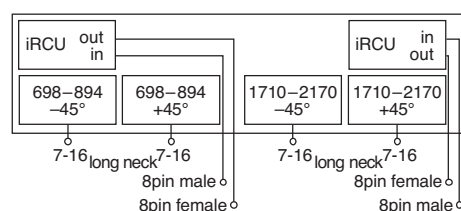

Multi-band Panel

Dual Polarization

Half-power Beam Width

Integrated replaceable Remote Control Unit

Adjustable Electrical Downtilt

698–894

1710–2170

X

X

85°

85°

iRCU

iRCU

0°–10°

0°–10°

KATHREIN


Antennen · Electronic



XXPol Panel iRCU 698–894/1710–2170 85°/85° 16/17.5dBi 0°–10°/0°–10°T

Type No.	80010723v01				clamps included
A) Antenna specifications					
	698–894		1710–2170		
Frequency range	698 – 806 MHz	824 – 894 MHz	1710 – 1755 MHz 2110 – 2170 MHz	1850 – 1990 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	13.5 dBd / 15.65 dBi	14 dBd / 16.15 dBi	17.5 dBi	17.5 dBi	
Horizontal Pattern:					
Half-power beam width	85°	85°	85°	85°	
Front-to-back ratio	Copolar: > 28 dB Average: 31 dB	Copolar: > 27 dB Average: 29 dB	Copolar: > 25 dB Average: 28 dB	Copolar: > 25 dB Average: 28 dB	
Cross polar ratio					
Main direction	0°				
Sector	±60°				
	Typically: > 22 dB > 10 dB, Avg. 16 dB	Typically: > 24 dB > 10 dB, Avg. 16 dB	Typically: > 18 dB > 10 dB, Avg. 12 dB	Typically: > 18 dB > 8 dB, Avg. 12 dB	
Tracking, Avg.	0.5 dB		0.5 dB		
Squint	±4.0°		±4.5°		
Vertical Pattern:					
Half-power beam width	9.5°	8.5°	5.5°	5.5°	
Electrical tilt	0°–10°, continuously adjustable		0°–10°, continuously adjustable		
Min. sidelobe suppression for first sidelobe above main beam:	0° ... 5° ... 10° T 16 ... 16 ... 18 dB	0° ... 5° ... 10° T 15 ... 18 ... 18 dB	0° ... 5° ... 10° T 16 ... 16 ... 16 dB	0° ... 5° ... 10° T 16 ... 16 ... 16 dB	
Average:	17 ... 19 ... 21 dB	16 ... 19 ... 22 dB	18 ... 18 ... 18 dB	17 ... 17 ... 18 dB	
Impedance	50 Ω				
VSWR	< 1.5				
Isolation, between ports	Intrasystem: > 30 dB, Intersystem: > 35 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	500 W (at 50 °C ambient temperature)		300 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female (long neck) iRCU in: 2 x 8pin male iRCU out: 2 x 8pin female				
Connector position	Bottom				
Wind load	Frontal: 1210 N (at 150 km/h) 3040 N (at 150 mph) Lateral: 450 N (at 150 km/h) 1130 N (at 150 mph) Rearside: 1270 N (at 150 km/h) 3170 N (at 150 mph)				
Max. wind velocity	241 km/h (150 mph)				
Height/width/depth	2368 / 300 / 152 mm (93.2 / 11.8 / 6.0 inches)				
Category of mounting hardware	H (Heavy)				
Weight	31 kg (68.2 lbs) / 33 kg (72.6 lbs) (clamps incl.)				
Packing size	2596 x 322 x 190 mm (102.2 x 12.6 x 7.5 inches)				
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter				

iRCU specifications (86010149) see page 29

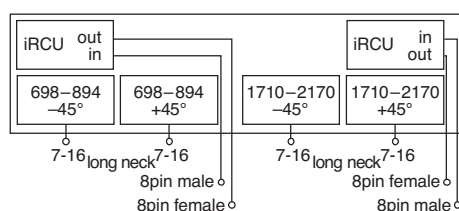

Integrable Remote Control Unit (iRCU)

KATHREIN
Antennen · Electronic

Kathrein's 86010149 integrable Remote Control Unit (iRCU) allow operators to control the electrical tilt of compatible antennas without direct access to the antenna.

- Compliant to AISG 1.1 and 3GPP/AISG 2.0
- Field replaceable without dismantling the antenna
- Daisy Chain feasibility
- Allow control of the antenna either locally through a laptop computer, on site desktop computer, the optional central control unit; remotely via an ethernet network or over the internet



Type No.	86010149
Protocols	Compliant to AISG 1.1 and 3GPP/AISG 2.0
Logical interface ex factory ¹⁾	AISG 2.0/3GPP
Input voltage range	10 ... 30 V (pin 1, pin 6)
Power consumption	< 1 W (stand by); < 10 W (motor activated)
Connectors ²⁾	2 x 8 pin connector according to IEC 60130-9; according to AISG Daisy chain in: male; Daisy chain out: female
Hardware interfaces	RS 485A/B (pin 5, pin 3); power supply (pin 1, pin 6); DC return (pin 7); according to AISG / 3GPP
Adjustment time (full range)	40 sec (typically, depending on antenna type)
Adjustment cycles	> 50,000
Temperature range	-40 °C ... +60 °C
Protection class	IP 24
Lightning protection	AISG interface (each pin); 2.5 kA (10/350µs); 8 kA (8/20µs)
Weight	480 g (1.16 lbs), 1.0 G lbs
Packing size	245 x 93 x 102 mm, (9.6 x 3.6 x 4 inches)
Dimensions (H x W x D)	170 x 68.5 x 66 mm, (6.68 x 2.7 x 2.6 inches)



¹⁾ The protocol of the logical interface can be switched from 3GPP/AISG 2.0 to AISG 1.1 and vice versa with a vendor specific command.

Please note:

If the Primary of the RET system doesn't support the standard of the 'logical interface ex factory', the iRCU must be switched to the appropriate standard of the Primary before installation. Please contact Kathrein for further information.

²⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

Standards EN 60950-1 (Safety)
 EN 55022 (Emission)
 EN 55024 (Immunity)
 ETS 300019-1-4 (Environmental)

Certification: CE, FCC15.107 class B

Scope of supply: Integrable Remote Control Unit

Summary – Directional Antennas

Dual Polarization +45°/–45°

800/900

Dual Polarization +45°/–45°

Type					Type No.	Height [mm]	Connector position	Page
XPol Panel	790–960	30°	18dBi	0°T	80010642	1298	rearside	32
XPol Panel	790–960	30°	21dBi	0°T	80010643	2254	rearside	32
XPol Panel	790–960	30°	20.5dBi	0°–10°T	80010456v02	2254	rearside	33
XPol Panel	806–960	65°	9dBi	0°T	739619	256	bottom or top	34
XPol Panel	806–960	65°	12.5dBi	0°T	739620	656	bottom or top	34
XPol Panel	790–960	65°	15dBi	0°T	80010202v02	1294	bottom	35
XPol Panel	790–960	65°	15dBi	6°T	80010207v01	1294	bottom	35
XPol Panel	790–960	65°	15dBi	0°–14°T	80010303v02	1294	bottom	36
XPol Panel	790–960	65°	17dBi	0°T	80010203v02	1934	rearside	36
XPol Panel	790–960	65°	17dBi	6°T	80010294v02	1934	rearside	37
XPol Panel	790–960	65°	16.5dBi	0°–10°T	80010634v01	1934	rearside	37
XPol Panel	790–960	65°	18dBi	0°T	80010204v02	2254	rearside	38
XPol Panel	790–960	65°	17.5dBi	0°–8°T	80010305v02	2254	rearside	38
XPol Panel	790–960	65°	18dBi	0°T	80010215v01	2574	rearside	39
XPol Panel	790–960	65°	18dBi	6°T	80010208v01	2574	rearside	39
XPol Panel	790–960	65°	17.5dBi	0°–10°T	80010306v02	2574	bottom	40
XPol Panel	790–960	65°	18dBi	0°–10°T	80010307v01	2574	rearside	40
XPol Panel	790–960	85°	13.5dBi	0°–14°T	80010308v01	1294	bottom	41
XPol Panel	790–960	85°	15dBi	0°–10°T	80010309v01	1934	bottom	41
XPol Panel	790–960	85°	17dBi	0°T	80010217v01	2574	rearside	42
XPol Panel	790–960	85°	16dBi	0°–10°T	80010310v01	2574	bottom	42
XPol Panel	790–960	85°	16.5dBi	0°–10°T	80010300v01	2574	rearside	43

New or changed product

Panel

Dual Polarization

Half-power Beam Width

790–960

X

30°

KATHREIN

Antennen · Electronic

XPol Panel 790–960 30° 18dBi 0°T

Type No.	80010642			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 17.5 dBi	2 x 17.6 dBi	2 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	33°	32°	30°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio				
Maindirection 0°	25 dB	25 dB	25 dB	
Tracking, Avg.		1.0 dB		
Squint		±1.0°		
Vertical Pattern:				
Half-power beam width	14.5°	14.0°	12.8°	
Sidelobe suppression for first sidelobe above main beam	≥ 14 dB	≥ 13 dB	≥ 12 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear: 970 / 180 / 1160 N			
Height/width/depth	1298 / 576 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	13 kg / 15 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			



XPol Panel 790–960 30° 21dBi 0°T

Type No.	80010643			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° T	2 x 20.2 dBi	2 x 20.4 dBi	2 x 20.8 dBi	
Horizontal Pattern:				
Half-power beam width	33°	32°	30°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio				
Maindirection 0°	Typically: 30 dB	Typically: 26 dB	Typically: 23 dB	
Tracking, Avg.		2.0 dB		
Squint		±2.0°		
Vertical Pattern:				
Half-power beam width	8..4°	8.2°	7.4°	
Sidelobe suppression for first sidelobe above main beam	> 15 dB	> 15 dB	> 15 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear: 1760 / 330 / 2040 N			
Height/width/depth	2254 / 576 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	20.5 kg / 22.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			



Panel

Dual Polarization

Half-power Beam Width

790–960

X

30°

KATHREIN

Antennen · Electronic

800/960
XPoI

XPoI Panel 790–960 30° 20.5dBi 0°–10°T

Type No.	80010456v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° T	2 x 20.0 dBi	2 x 20.2 dBi	2 x 20.5 dBi	
Horizontal Pattern:				
Half-power beam width	33°	32°	30°	
Front-to-back ratio, copolar	> 28 dB	> 29 dB	> 30 dB	
Cross polar ratio				
Maindirection0°	Typically: 25 dB	Typically: 23 dB	Typically: 20 dB	
Tracking, Avg.	2.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	9.1°	8.8°	8.5°	
Electrical tilt	0.5°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T > 16 ... 13 ... 13 dB	0° ... 5° ... 10° T > 18 ... 18 ... 17 dB	0° ... 5° ... 10° T > 18 ... 16 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Adjustment mechanism	1x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1760 / 330 / 2040 N			
Height/width/depth	2254 / 576 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	22 kg / 24 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			



Panel Dual Polarization Half-power Beam Width

806–960

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 806–960 65° 9dBi

Type No.	739619	
Frequency range	806–960	
	806 – 880 MHz	880 – 960 MHz
Polarization	+45°, –45°	+45°, –45°
Gain	2 x 8.5 dBi	2 x 9 dBi
Half-power beam width Copolar +45°/–45°	Horizontal: 70° Vertical: 70°	Horizontal: 65° Vertical: 68°
Front-to-back ratio, copolar	> 27 dB	> 27 dB
Cross polar ratio Maindirection 0° Sector ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB
Isolation	> 30 dB	
VSWR	< 1.5	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	350 W (at 50 °C ambient temperature)	
Input	2 x 7-16 female	
Connector position	Bottom or top	
Weight	3 kg	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 40 / 25 / 90 N	
Height/width/depth	256 / 262 / 116 mm	



XPol Panel 806–960 65° 12.5dBi

Type No.	739620	
Frequency range	806–960	
	806 – 880 MHz	880 – 960 MHz
Polarization	+45°, –45°	+45°, –45°
Gain	2 x 12 dBi	2 x 12.5 dBi
Half-power beam width Copolar +45°/–45°	Horizontal: 68° Vertical: 29°	Horizontal: 65° Vertical: 27°
Front-to-back ratio, copolar	> 30 dB	
Isolation	> 30 dB	
VSWR	< 1.5	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	500 W (at 50 °C ambient temperature)	
Input	2 x 7-16 female	
Connector position	Bottom or top	
Weight	6 kg	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 110 / 60 / 240 N	
Height/width/depth	656 / 262 / 116 mm	



Panel

Dual Polarization

Half-power Beam Width

790–960

X

65°

KATHREIN

Antennen · Electronic

XPoI Panel 790–960 65° 15dBi 0°T

Type No.	80010202v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 14.5 dBi	2 x 14.7 dBi	2 x 15 dBi	
Horizontal Pattern:				
Half-power beam width	69°	68°	65°	
Front-to-back ratio (180°±30°)	> 23 dB	> 24 dB	> 25 dB	
Cross polar ratio				
Maindirection 0°	> 20 dB	> 20 dB	> 20 dB	
Sector ±60°	> 11 dB	> 11 dB	> 11 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	14.7°	14.3°	13.2°	
Sidelobe suppression for first sidelobe above horizon	> 14 dB	> 15 dB	> 14 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 430 / 200 / 600 N				
Height/width/depth				
1294 / 259 / 99 mm				
Category of mounting hardware				
M (Medium)				
Weight				
6.5 kg / 8.5 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				

XPoI Panel 790–960 65° 15dBi 6°T

Type No.	80010207v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 14.5 dBi	2 x 14.7 dBi	2 x 15 dBi	
Horizontal Pattern:				
Half-power beam width	66°	65°	63°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio				
Maindirection 0°	Typically: > 20 dB	Typically: > 20 dB	Typically: > 20 dB	
Sector ±60°	Typically: > 10 dB	Typically: > 10 dB	Typically: > 10 dB	
Vertical Pattern:				
Half-power beam width	16°	15.7°	14.6°	
Electrical tilt	6°, fixed			
Sidelobe suppression for: first sidelobe above horizon sector 0°–30° above horizon	> 13 dB > 13 dB	> 14 dB > 14 dB	> 16 dB > 14 dB	
VSWR	< 1.4	< 1.3		
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 790 / 370 / 1090 N			
Height/width/depth	1294 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	7.5 kg / 9.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

Panel

Dual Polarization

Half-power Beam Width

790–960

X

65°

KATHREIN

Antennen · Electronic

XPoI Panel 790–960 65° 15dBi 0°–14°T

Type No.	80010303v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	14.5 ... 14.4 ... 14.3	14.7 ... 14.5 ... 14.4	15 ... 14.8 ... 14.7	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	
Horizontal Pattern:				
Half-power beam width	67°	66°	65°	
Front-to-back ratio, copolar	> 24 dB	> 25 dB	> 25 dB	
Cross polar ratio				
Maindirection 0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:				
Half-power beam width	15.7°	15.5°	15°	
Electrical tilt	0°–14°, continuously adjustable			
Sidelobe suppression for first sidelobe above horizon	0° ... 7° ... 14° T 15 ... 14 ... 15 dB	0° ... 7° ... 14° T 18 ... 15 ... 15 dB	0° ... 7° ... 14° T 18 ... 15 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	400 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 440 / 210 / 610 N			
Height/width/depth	1294 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	8.5 kg / 10.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



XPoI Panel 790–960 65° 17dBi 0°T

Type No.	80010203v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 16.4 dBi	2 x 16.6 dBi	2 x 16.9 dBi	
Horizontal Pattern:				
Half-power beam width	69°	67°	65°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio				
Maindirection 0°	> 22 dB	> 22 dB	> 22 dB	
Sector ±30°	> 18 dB	> 18 dB	> 18 dB	
Sector ±60°	> 14 dB	> 14 dB	> 14 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	9.9°	9.5°	8.9°	
Sidelobe suppression for first sidelobe above horizon	> 13 dB	> 15 dB	> 15 dB	
VSWR	< 1.5	< 1.5	< 1.4	
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 690 / 310 / 910 N			
Height/width/depth	1934 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	9.5 kg / 11.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



Panel

Dual Polarization

Half-power Beam Width

790–960

X

65°

KATHREIN

Antennen · Electronic

800960
XPoI

XPoI Panel 790–960 65° 17dBi 6°T

Type No.	80010294v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 16.2 dBi	2 x 16.5 dBi	2 x 16.9 dBi	
Horizontal Pattern:				
Half-power beam width	69°	68°	65°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio				
Maindirection 0°	Typ. > 20 dB	Typ. > 20 dB	Typ. > 20 dB	
Sector ±60°	Typ. > 10 dB	Typ. > 10 dB	Typ. > 10 dB	
Tracking, Avg.	1.0 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	9.4°	9.3°	8.8°	
Electrical tilt	6°, fixed			
Sidelobe suppression for first sidelobe above horizon	> 14 dB	> 15 dB	> 15 dB	
VSWR	< 1.5	< 1.4	< 1.3	
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear side: 690 / 310 / 910 N			
Height/width/depth	1934 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	9.5 kg / 11.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



XPoI Panel 790–960 65° 16.5dBi 0°–10°T

Type No.	80010634v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.2 ... 16.4 ... 16.2	16.3 ... 16.6 ... 16.3	16.6 ... 16.8 ... 16.6	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:				
Half-power beam width	69°	68°	65°	
Front-to-back ratio (180°±30°)	> 24 dB	> 25 dB	> 25 dB	
Cross polar ratio				
Maindirection	0°	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB
Sector	±60°	> 10 dB	> 10 dB	> 10 dB
Tracking, Avg.		0.5 dB		
Squint		±1.5°		
Vertical Pattern:				
Half-power beam width	10°	9.9°	9.7°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T 18 ... 18 ... 18 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB	0° ... 5° ... 10° T 18 ... 18 ... 18 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
400 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Rearside				
Adjustment mechanism				
1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rear side: 680 / 310 / 900 N				
Height/width/depth				
1934 / 259 / 99 mm				
Category of mounting hardware				
M (Medium)				
Weight				
11 kg / 13 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				



Panel

Dual Polarization

Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 790–960 65° 18dBi 0°T

Type No.	80010204v02			clamps included
	790 – 960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 17.2 dBi	2 x 17.5 dBi	2 x 17.8 dBi	
Horizontal Pattern:				
Half-power beam width	69°	67°	65°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio				
Maindirection 0°	> 25 dB	> 25 dB	> 25 dB	
Sector ±60°	> 14 dB	> 14 dB	> 14 dB	
Tracking, Avg.	1.0 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	8.5°	8.3°	7.8°	
Sidelobe suppression for first sidelobe above horizon	> 13 dB	> 14 dB	> 15 dB	
VSWR	< 1.5	< 1.4	< 1.4	
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear side: 790 / 370 / 1090 N			
Height/width/depth	2254 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	11 kg / 13 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

XPol Panel 790–960 65° 17.5dBi 0°–8°T

Type No.	80010305v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.8 ... 17 ... 16.7	16.9 ... 17.1 ... 16.9	17.2 ... 17.4 ... 17.0	
Tilt	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:				
Half-power beam width	69°	67°	65°	
Front-to-back ratio, copolar	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio				
Maindirection 0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector ±60°	Typically: > 10 dB	Typically: > 10 dB	Typically: > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	9.1°	8.8°	8.5°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 2° ... 4° ... 8° T 18 ... 18 ... 18 ... 16 dB	0° ... 2° ... 4° ... 8° T 18 ... 18 ... 18 ... 16 dB	0° ... 2° ... 4° ... 8° T 20 ... 18 ... 17 ... 15 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Rearside				
Adjustment mechanism				
1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rear side: 800 / 390 / 1090 N				
Height/width/depth				
2254 / 259 / 99 mm				
Category of mounting hardware				
M (Medium)				
Weight				
11.5 kg / 13.5 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				

Panel

Dual Polarization

Half-power Beam Width

790–960

X

65°

KATHREIN
Antennen · Electronic

800960
XPoI

XPoI Panel 790–960 65° 18dBi 0°T

Type No.	80010215v01			clamps included
	790–960			
Frequency range	790 – 866 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 17.7 dBi	2 x 17.9 dBi	2 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	69°	67°	65°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio 0°	> 25 dB	> 25 dB	> 25 dB	
Sector ±60°	> 12 dB	> 12 dB	> 12 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	7.4°	7.2°	6.8°	
Sidelobe suppression for first sidelobe above main beam	≥ 14 dB	≥ 15 dB	≥ 15 dB	
Null-fill	Typically: –25 dB			
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Rearside				
Wind load (at 150 km/h)				
Frontal / lateral / rear: 940 / 420 / 1270 N				
Height/width/depth				
2574 / 259 / 99 mm				
Category of mounting hardware				
H (Heavy)				
Weight				
12 kg / 14 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 42 – 115 mm diameter				



XPoI Panel 790–960 65° 18dBi 6°T

Type No.	80010208v01			clamps included
	790–960			
Frequency range	790 – 866 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 17.7 dBi	2 x 17.9 dBi	2 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	69°	67°	65°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio 0°	> 25 dB	> 25 dB	> 25 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	7.4°	7.2°	6.8°	
Electrical tilt	6°, fixed			
Sidelobe suppression for first sidelobe above main beam	≥ 16 dB	≥ 17 dB	≥ 17 dB	
Null-fill	Typically: –25 dB			
Impedance	50 Ω			
VSWR	< 1.4			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear: 940 / 420 / 1270 N			
Height/width/depth	2574 / 259 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	12 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			



Panel

Dual Polarization

Half-power Beam Width

790–960

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 790–960 65° 17.5dBi 0°–10°T

Type No.	80010306v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	17.0 ... 17.1 ... 17.0	17.1 ... 17.2 ... 17.1	17.3 ... 17.4 ... 17.3	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	
Horizontal Pattern:				
Half-power beam width	68°	66°	65°	
Front-to-back ratio (180°±30°)	> 24 dB	> 25 dB	> 25 dB	
Cross polar ratio	0°	Typically: 23 dB	Typically: 23 dB	Typically: 25 dB
Sector	±60°	Typically: > 10 dB	Typically: > 10 dB	Typically: > 10 dB
Tracking, Avg.	1.0 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	7.7°	7.5°	7.3°	
Electrical tilt	0.5°–9.5°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T ≥ 17 ... 14 ... 14 dB	0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 15 dB	0.5° ... 5° ... 9.5° T ≥ 20 ... 18 ... 18 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –153 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female (long neck)				
Connector position				
Bottom				
Adjustment mechanism				
1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 940 / 440 / 1270 N				
Height/width/depth				
2574 / 259 / 99 mm				
Category of mounting hardware				
H (Heavy)				
Weight				
14 kg / 16 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 42 – 115 mm diameter				

XPol Panel 790–960 65° 18dBi 0°–10°T

Type No.	80010307v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	17.4 ... 17.5 ... 17.4	17.5 ... 17.6 ... 17.5	17.7 ... 17.9 ... 17.7	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	
Horizontal Pattern:				
Half-power beam width	68°	67°	65°	
Front-to-back ratio (180°±30°)	> 24 dB	> 25 dB	> 25 dB	
Cross polar ratio	0°	Typically: 22 dB	Typically: 23 dB	Typically: 25 dB
Sector	±60°	Typically: > 10 dB	Typically: > 10 dB	Typically: > 10 dB
Tracking, Avg.	1.0 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	7.7°	7.5°	7.3°	
Electrical tilt	0.5°–9.5°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 15 dB	0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 15 dB	0.5° ... 5° ... 9.5° T ≥ 18 ... 16 ... 15 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Rearside				
Adjustment mechanism				
1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 940 / 420 / 1270 N				
Height/width/depth				
2574 / 259 / 99 mm				
Category of mounting hardware				
H (Heavy)				
Weight				
13 kg / 15 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 42 – 115 mm diameter				



Panel

Dual Polarization

Half-power Beam Width

790–960

X

85°

KATHREIN

Antennen · Electronic

XPol Panel 790–960 85° 13.5dBi 0°–14°T

Type No.	80010308v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	13.2 ... 13.3 ... 13.2	13.3 ... 13.4 ... 13.3	13.4 ... 13.5 ... 13.4	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	
Horizontal Pattern:				
Half-power beam width	86°	85°	83°	
Front-to-back ratio (180°±0°)	> 24 dB	> 24 dB	> 26 dB	
Front-to-back ratio (180°±30°)	> 20 dB	> 22 dB	> 24 dB	
Cross polar ratio Sector 0° ±60°	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	16°	15.5°	15°	
Electrical tilt	0°–14°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 7° ... 14° T ≥ 17 ... 16 ... 15 dB	0° ... 7° ... 14° T ≥ 17 ... 17 ... 16 dB	0° ... 7° ... 14° T ≥ 17 ... 16 ... 16 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 430 / 200 / 590 N			
Height/width/depth	1294 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	9 kg / 11 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



XPol Panel 790–960 85° 15dBi 0°–10°T

Type No.	80010309v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average Gain (dBi)	14.8 ... 15.0 ... 14.6	14.9 ... 15.1 ... 14.7	14.8 ... 15.2 ... 15.0	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:				
Half-power beam width	85°	85°	83°	
Front-to-back ratio (180°±0°)	> 25 dB	> 25 dB	> 26 dB	
Front-to-back ratio (180°±30°)	> 21 dB	> 21 dB	> 21 dB	
Cross polar ratio 0°	Typically: 23 dB	Typically: 22 dB	Typically: 22 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±3.0°			
Vertical Pattern:				
Half-power beam width	10.1°	9.8°	9.6°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam:	0° ... 5° ... 10° T	0° ... 5° ... 10° T	0° ... 5° ... 10° T	
Avg.:	≥ 15 ... 15 ... 14 dB	≥ 15 ... 15 ... 15 dB	≥ 18 ... 18 ... 18 dB	
	≥ 19 ... 19 ... 19 dB	≥ 20 ... 20 ... 20 dB	≥ 22 ... 22 ... 22 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	400 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Adjustment mechanism	1x, Position bottom continuously adjustable			
Wind load	Frontal / lateral / rearside: 680 / 310 / 900 N (at 150 km/h)			
Height/width/depth	1934 / 259 / 99 mm			
Category of mounting hardware	M (Medium)			
Weight	11.5 kg / 13.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



Panel

Dual Polarization

Half-power Beam Width

790–960

X

85°

KATHREIN

Antennen · Electronic

XPoI Panel 790–960 85° 17dBi 0°T

Type No.	80010217v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	16.6 dBi	16.7 dBi	16.8 dBi	
Horizontal Pattern:				
Half-power beam width	86°	85°	83°	
Front-to-back ratio (180°±0°)	> 25 dB	> 25 dB	> 25 dB	
Front-to-back ratio (180°±30°)	> 23 dB	> 24 dB	> 24 dB	
Cross polar ratio 0°	> 20 dB	> 20 dB	> 20 dB	
Sector ±60°	> 15 dB	> 15 dB	> 13 dB	
Tracking, Avg.	1.0 dB			
Squint	±4.5°			
Vertical Pattern:				
Half-power beam width	7.5°	7.3°	7.0°	
Sidelobe suppression for first sidelobe above main beam	16 dB	17 dB	16 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear: 940 / 420 / 1270 N			
Height/width/depth	2574 / 259 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	12 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			

XPoI Panel 790–960 85° 16dBi 0°–10°T

Type No.	80010310v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	15.8 ... 15.6 ... 15.4	16.0 ... 15.9 ... 15.8	16.2 ... 16.2 ... 16.2	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	
Horizontal Pattern:				
Half-power beam width	86°	85°	83°	
Front-to-back ratio (180°±0°)	> 24 dB	> 24 dB	> 26 dB	
Front-to-back ratio (180°±30°)	> 20 dB	> 22 dB	> 24 dB	
Cross polar ratio 0°	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±3.5°			
Vertical Pattern:				
Half-power beam width	8.1°	7.9°	7.6°	
Electrical tilt	0.5°–9.5°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T ≥ 18 ... 14 ... 14 dB	0.5° ... 5° ... 9.5° T ≥ 18 ... 17 ... 16 dB	0.5° ... 5° ... 9.5° T ≥ 17 ... 16 ... 16 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –153 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Adjustment mechanism				
1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 950 / 420 / 1270 N				
Height/width/depth				
2574 / 259 / 99 mm				
Category of mounting hardware				
H (Heavy)				
Weight				
14 kg / 16 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 42 – 115 mm diameter				

Panel

Dual Polarization

Half-power Beam Width

790–960

X

85°

KATHREIN

Antennen · Electronic

800960
XPol

XPol Panel 790–960 85° 16.5dBi 0°–10°T

Type No.	80010300v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.2 ... 16.2 ... 15.8	16.3 ... 16.3 ... 16.1	16.5 ... 16.6 ... 16.5	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	
Horizontal Pattern:				
Half-power beam width	85°	85°	83°	
Front-to-back ratio (180°±0°)	> 24 dB	> 25 dB	> 26 dB	
Front-to-back ratio (180°±30°)	> 21 dB	> 23 dB	> 24 dB	
Cross polar ratio 0°	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±3.5°			
Vertical Pattern:				
Half-power beam width	8°	7.8°	7.6°	
Electrical tilt	0.5°–9.5°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T ≥ 18 ... 15 ... 14 dB	0.5° ... 5° ... 9.5° T ≥ 18 ... 17 ... 16 dB	0.5° ... 5° ... 9.5° T ≥ 18 ... 16 ... 15 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
500 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Rearside				
Adjustment mechanism				
1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 940 / 420 / 1270 N				
Height/width/depth				
2574 / 259 / 99 mm				
Category of mounting hardware				
H (Heavy)				
Weight				
14 kg / 16 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 42 – 115 mm diameter				



Summary – Directional Antennas

2-Broad-band

800/900

Dual Polarization +45°/–45°

Type					Type No.	Height [mm]	Connector position	Page
XXPol Panel	790–862	65°	14.5dBi	0°–12°T	80010667	1355	bottom	46
	880–960	65°	15dBi	0°–12°T				
XXPol Panel	790–862	65°	16dBi	0°–10°T	80010668	1934	bottom	47
	880–960	65°	16.5dBi	0°–10°T				
XXPol Panel	790–862	65°	17dBi	0°–8°T	80010669	2574	bottom	48
	880–960	65°	17.5dBi	0°–8°T				
XXPol Panel	824–960	60°	16dBi	0°–10°T	80010516v01	2024	rearside	49
	824–960	60°	16dBi	0°–10°T				
XXPol Panel	790–960	65°	17.5dBi	0°–8°T	80010647v01	2254	rearside	50
	790–960	65°	17.5dBi	0°–8°T				
XXPol Panel	824–960	65°	17dBi	0°–8°T	80010517v01	2631	rearside	51
	824–960	65°	17dBi	0°–8°T				
XXPol Panel	790–960	90°	15dBi	0°–10°T	80010816	1934	rearside	52
	790–960	90°	15dBi	0°–10°T				
XXPol Panel	790–960	90°	16dBi	0°–8°T	80010817	2896	rearside	53
	790–960	90°	16dBi	0°–8°T				

New or changed product

When deploying
2-Broad-band Antennas,
please also consider using
special Hybrid Combiners
(see page 277)

Dual-band Panel Dual Polarization Half-power Beam Width

790–862

880–960

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–862/880–960 65°/65° 14.5/15dBi 0°–12°/0°–12°T

Type No.	80010667 clamps included	
	790–862	880–960
Frequency range	790 – 862 MHz	880 – 960 MHz
Polarization	+45°, –45°	+45°, –45°
Average gain (dBi)	14.3 ... 14.4 ... 14.1	14.8 ... 15.0 ... 14.6
Tilt	0° ... 6° ... 12°	0° ... 6° ... 12°
Horizontal Pattern:		
Half-power beam width	68°	64°
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB
Cross polar ratio		
Main direction 0°	20 dB	20 dB
Sector ±60°	> 10 dB	> 10 dB
Vertical Pattern:		
Half-power beam width	15.2°	13.9°
Electrical tilt, continuously adjustable	0°–12°	0°–12°
Sidelobe suppression for first sidelobe above main beam	0° ... 6° ... 12° T ≥ 17 ... 16 ... 15 dB	0° ... 6° ... 12° T ≥ 17 ... 15 ... 15 dB
VSWR	< 1.5	
Isolation: Intrasystem	> 28 dB, Typ. > 30 dB	
Isolation: Intersystem	> 28 dB, Typ. > 30 dB (790–862 // 880–960 MHz)	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	350 W (at 50 °C ambient temperature)	
Input	4 x 7-16 female	
Connector position	Bottom	
Adjustment mechanism	2x, Position bottom continuously adjustable	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 630 / 220 / 730 N	
Height/width/depth	1355 / 303 / 99 mm	
Category of mounting hardware	M (Medium)	
Weight	14 kg / 16 kg (clamps incl.)	
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter	

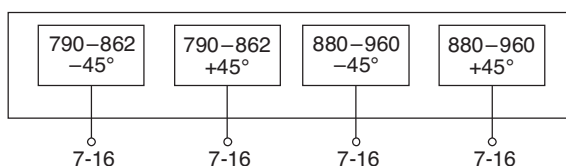

Dual-band Panel Dual Polarization Half-power Beam Width

790–862

880–960

X

X

65°

65°

KATHREIN


Antennen · Electronic

XXPol Panel 790–862/880–960 65°/65° 16/16.5dBi 0°–10°/0°–10°T

Type No.	80010668 clamps included	
	790–862	880–960
Frequency range	790 – 862 MHz	880 – 960 MHz
Polarization	+45°, –45°	+45°, –45°
Average gain (dBi)	15.9 ... 16.0 ... 15.8	16.3 ... 16.6 ... 16.1
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°
Horizontal Pattern:		
Half-power beam width	67°	63°
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB
Cross polar ratio		
Maindirection 0°	23 dB	25 dB
Sector ±60°	> 10 dB	> 10 dB
Vertical Pattern:		
Half-power beam width	10°	9.7°
Electrical tilt, continuously adjustable	0°–10°	0°–10°
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T ≥ 17 ... 16 ... 16 dB	0° ... 5° ... 10° T ≥ 18 ... 16 ... 16 dB
VSWR	< 1.5	
Isolation: Intrasystem	> 28 dB, Typ. > 30 dB	
Isolation: Intersystem	> 28 dB, Typ. > 30 dB (790–862 // 880–960 MHz)	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	400 W (at 50 °C ambient temperature)	
Input	4 x 7-16 female	
Connector position	Bottom	
Adjustment mechanism	2x, Position bottom continuously adjustable	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 920 / 320 / 1050 N	
Height/width/depth	1934 / 303 / 99 mm	
Category of mounting hardware	M (Medium)	
Weight	18.5 kg / 20.5 kg (clamps incl.)	
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter	



800900
XXPol

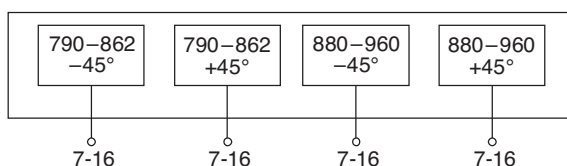

Dual-band Panel Dual Polarization Half-power Beam Width

790–862

880–960

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–862/880–960 65°/65° 17/17.5dBi 0°–8°/0°–8°T

Type No.	80010669		clamps included
	790–862	880–960	
Frequency range	790 – 862 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.6 ... 16.9 ... 16.6	17.1 ... 17.4 ... 17.1	
Tilt	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:			
Half-power beam width	67°	63°	
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB	
Cross polar ratio			
Maindirection 0°	> 25 dB	> 23 dB	
Sector ±60°	> 10 dB	> 10 dB	
Vertical Pattern:			
Half-power beam width	7.7°	7.2°	
Electrical tilt, continuously adjustable	0°–8°	0°–8°	
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° T ≥ 18 ... 15 ... 15 dB	0° ... 4° ... 8° T ≥ 18 ... 16 ... 15 dB	
VSWR	< 1.5		
Isolation: Intrasystem	> 28 dB, Typ. > 30 dB		
Isolation: Intersystem	> 28 dB, Typ. > 30 dB (790–862 // 880–960 MHz)		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	350 W (at 50 °C ambient temperature)		
Input	4 x 7-16 female		
Connector position	Bottom		
Adjustment mechanism	2x, Position bottom continuously adjustable		
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1270 / 430 / 1430 N		
Height/width/depth	2574 / 303 / 99 mm		
Category of mounting hardware	H (Heavy)		
Weight	18 kg / 20 kg (clamps incl.)		
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter		

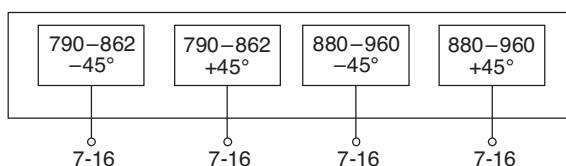

2-Multi-band Panel Dual Polarization Half-power Beam Width

824–960

824–960

X

X

60°


60°

KATHREIN

Antennen · Electronic

XXPol Panel 824–960/824–960 60°/60° 16/16dBi 0°–10°/0°–10°T

Type No.	80010516v01 clamps included	
	824–960	
Frequency range	824 – 894 MHz	880 – 960 MHz
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°
Gain at 0° tilt	4 x 15.5 dBi	4 x 15.7 dBi
Horizontal Pattern:		
Half-power beam width	60°	58°
Front-to-back ratio	> 25 dB	> 25 dB
Cross polar ratio 0° Sector ±60°	Typically: 15 dB > 10 dB	Typically: 16 dB > 10 dB
Vertical Pattern:		
Half-power beam width	9.8°	9.3°
Electrical tilt	0°–10°, continuously adjustable	
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T ≥ 14 ... 15 ... 15 dB	0° ... 5° ... 10° T ≥ 14 ... 15 ... 15 dB
VSWR	< 1.5	
Isolation, between ports	Typically: > 25 dB	Typically: > 28 dB
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	500 W (at 50 °C ambient temperature)	
Input	4 x 7-16 female	
Connector position	Rearside, pointing downwards	
Adjustment mechanism	2x, Position bottom continuously adjustable	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 910 / 300 / 1150 N	
Height/width/depth	2024 / 374 / 169 mm	
Category of mounting hardware	H (Heavy)	
Weight	23 kg / 25 kg (clamps incl.)	
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter	

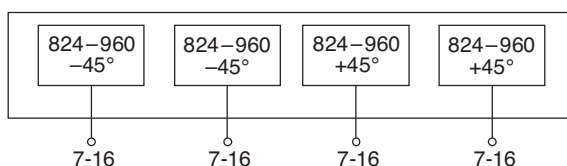800900
XXPol

2-Multi-band Panel Dual Polarization Half-power Beam Width

790–960

790–960

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/790–960 65°/65° 17.5/17.5dBi 0°–8°/0°–8°T

Type No.	80010647v01			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.9 ... 17.1 ... 17.0	17.0 ... 17.2 ... 17.1	17.3 ... 17.4 ... 17.1	
Tilt	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:				
Half-power beam width	66°	65°	64°	
Front-to-back ratio, copolar	> 27 dB	> 27 dB	> 27 dB	
Cross polar ratio				
Main direction	0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB
Sector	±60°	Typically: > 10 dB	Typically: > 10 dB	Typically: > 10 dB
Tracking, Avg.	1.0 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	9.1°	9.0°	8.5°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 3° ... 6° ... 8° T 18 ... 18 ... 16 ... 15 dB	0° ... 3° ... 6° ... 8° T 18 ... 18 ... 16 ... 15 dB	0° ... 3° ... 6° ... 8° T 18 ... 18 ... 16 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	400 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Rearside			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rear side: 1760 / 330 / 2040 N			
Height/width/depth	2254 / 576 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	24 kg / 26 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			

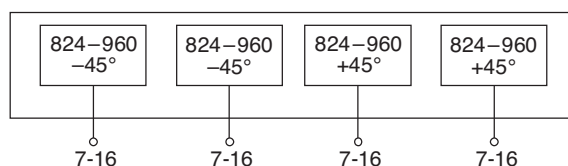

2-Multi-band Panel Dual Polarization Half-power Beam Width

824–960

824–960

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 824–960/824–960 65°/65° 17/17dBi 0°–8°/0°–8°T

Type No.	80010517v01 clamps included	
	824–960	
Frequency range	824 – 894 MHz	880 – 960 MHz
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°
Gain at 0° tilt	4 x 16.5 dBi	4 x 16.7 dBi
Horizontal Pattern:		
Half-power beam width	66°	61°
Front-to-back ratio	> 25 dB	> 25 dB
Cross polar ratio	Typically: 16 dB	Typically: 17 dB
Sector	0° ±60°	Typically: 17 dB > 10 dB
Vertical Pattern:		
Half-power beam width	7.2°	6.8°
Electrical tilt	0°–8°, continuously adjustable	
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° T ≥ 15 ... 15 ... 15 dB	0° ... 4° ... 8° T ≥ 15 ... 16 ... 15 dB
VSWR	< 1.5	
Isolation, between ports	Typically: > 25 dB	> 28 dB
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	500 W (at 50 °C ambient temperature)	
Input	4 x 7-16 female	
Connector position	Rearside, pointing downwards	
Adjustment mechanism	2x, Position bottom continuously adjustable	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1210 / 400 / 1540 N	
Height/width/depth	2631 / 374 / 169 mm	
Category of mounting hardware	H (Heavy)	
Weight	28 kg / 30 kg (clamps incl.)	
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter	

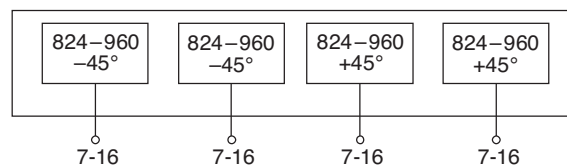

Dual-band Panel Dual Polarization Half-power Beam Width

790–960

790–960

X

X

90°


90°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/790–960 90°/90° 15/15dBi 0°–10°/0°–10°T

Type No.	80010816			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	14.5 ... 14.5 ... 14.3	14.6 ... 14.8 ... 14.5	14.8 ... 15.0 ... 14.8	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:				
Half-power beam width	93°	90°	87°	
Front-to-back ratio (180°±0°)	> 24 dB	> 24 dB	> 25 dB	
Front-to-back ratio (180°±30°)	> 20 dB	> 21 dB	> 22 dB	
Cross polar ratio	Typically: 20 dB	Typically: 20 dB	Typically: 18 dB	
Sector	0°	0°	0°	
	±60°	> 10 dB	> 10 dB	
Vertical Pattern:				
Half-power beam width	10.5°	10.2°	10°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T ≥ 18 ... 15 ... 14 dB	0° ... 5° ... 10° T ≥ 18 ... 17 ... 16 dB	0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	Intrasystem: > 28 dB, Intersystem: > 26 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	400 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Rearside			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (approx.) (at 150 km/h)	Frontal / lateral / rear: 910 / 380 / 1150 N			
Height/width/depth	1934 / 374 / 106 mm			
Category of mounting hardware	H (Heavy)			
Weight (approx.)	17 kg / 19 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			

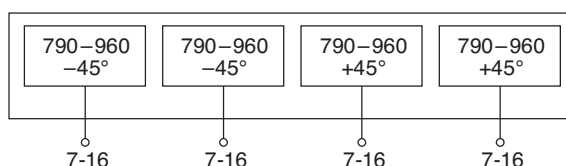

Dual-band Panel Dual Polarization Half-power Beam Width

790–960

790–960

X

X

90°


90°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/790–960 90°/90° 16/16dBi 0°–8°/0°–8°T

Type No.	80010817			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	15.4 ... 15.4 ... 15.0	15.7 ... 15.7 ... 15.4	16.0 ... 16.1 ... 15.9	
Tilt	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:				
Half-power beam width	93°	90°	87°	
Front-to-back ratio (180°±0°)	> 24 dB	> 24 dB	> 25 dB	
Front-to-back ratio (180°±30°)	> 20 dB	> 21 dB	> 22 dB	
Cross polar ratio	Typically: 20 dB	Typically: 20 dB	Typically: 18 dB	
Sector	0°	0°	0°	
	±60°	> 10 dB	> 10 dB	
Vertical Pattern:				
Half-power beam width	7.4°	7.2°	6.9°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° T ≥ 17 ... 17 ... 15 dB	0° ... 4° ... 8° T ≥ 17 ... 17 ... 15 dB	0° ... 4° ... 8° T ≥ 17 ... 17 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	Intrasystem: > 27 dB, Intersystem: > 27 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	400 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1270 / 400 / 1710 N			
Height/width/depth	2631 / 374 / 106 mm			
Category of mounting hardware	H (Heavy)			
Weight	24 kg / 26 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			

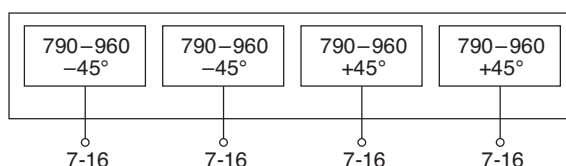

Summary – Directional Antennas

Vertical Polarization

800/900 / 1800/1900/2000

VPol – 800/900

Type	Type No.	Height [mm]	Connector position	Page
VPol Panel 870–960 20° 16.5dBi 0°T	735727	492	bottom	56
VPol BiDir 790–960 / 1710–2170 65° 5dBi 0°T	738445	312		57
VPol BiDir 790–960 / 1710–2170 65° 5dBi 0°T	738446	312		57
VPol LogPer 790–2690 65° 11dBi 0°T	742192v01	300	bottom	58
VPol Panel 790–960 65° 18.5dBi 0°T	730376v02	2574	rearside	59
VPol Panel 872–960 90° 7.5dBi 0°T	736854	262	bottom or top	60
VPol Panel 790–960 90° 17dBi 0°T	730378v02	2574	rearside	60
VPol Panel 870–960 120° 16dBi 0°T	730382	2574	rearside	61

VPol – 800/900 / 1800/1900/2000

VPol Panel 1710–2180 12° 18.5dBi 0°T	80010368	299	side	62
VPol BiDir 790–960 / 1710–2170 65° 5dBi 0°T	738445	312		57
VPol BiDir 790–960 / 1710–2170 65° 5dBi 0°T	738446	312		57
VPol LogPer 790–2690 65° 11dBi 0°T	742192v01	300	bottom	58

VVPol – 800/900 / 1800/1900/2000

VVPol Panel 824–960 C 90° 7dBi 0°T	742290	328	bottom or top	63
1710–2170 82° 7dBi 0°T				
VVPol Panel 824–960 C 90° 10dBi 0°T	80010046	662	bottom or top	63
1710–2170 82° 11dBi 0°T				

C = integrated Combiner

New or changed product

Additional versions on request

Panel

Vertical Polarization

Half-power Beam Width

870–960

V

20°

KATHREIN
Antennen · Electronic

VPol Panel 870–960 20° 16.5dBi

Type No.	735727
Frequency range	870 – 960 MHz
Polarization	Vertical
Gain	16.5 dBi
Half-power beam width	H-plane: 20° E-plane: 33°
Impedance	50 Ω
VSWR	< 1.3
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power per input	500 W (at 50 °C ambient temperature)
Input	7-16 female
Connector position	Rearside
Wind load (at 150 km/h)	Frontal / lateral / rearside: 500 / 70 / 715 N
Height/width/depth	492 / 992 / 190 mm
Category of mounting hardware	M (Medium)
Packing size	1010 x 630 x 265 mm



Material:	Radiator: Aluminum. Reflector screen: Weather-proof aluminum. Radome: Fiberglass, color: White. All screws and nuts: Stainless steel.
Ice protection:	Ice protection: Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.
Grounding:	The metal parts of the antenna including the mounting kit and the inner conductors are DC grounded.

Accessories (order separately)

Type No.	Description	Remarks	Weight approx.	Units per antenna
731651	1 clamp	Mast: 28 – 60 mm diameter	0.8 kg	2
738546	1 clamp	Mast: 50 – 115 mm diameter	1.0 kg	2
85010002	1 clamp	Mast: 110 – 220 mm diameter	2.7 kg	2
85010003	1 clamp	Mast: 210 – 380 mm diameter	4.8 kg	2

Multi-band Bidirectional Antenna 790–960/1710–2170

Vertical Polarization

Half-power Beam Width

V

65°

KATHREIN

Antennen · Electronic

VPol BiDir 790–960/1710–2170 65° 5dBi

Type No.	738445	738446
Input	1 x 7-16 female	1 x N female
Frequency range	790 – 960 MHz, 1710 – 2170 MHz	
VSWR	790 – 806 MHz: < 2.2 806 – 824 MHz: < 1.7 824 – 960 / 1710 – 2170 MHz: < 1.5	
Gain	790 – 960 MHz: 5 dBi 1710 – 1880 MHz: 5.5 dBi 1880 – 2170 MHz: 6.5 dBi	
Impedance	50 Ω	
Polarization	Vertical	
Max. power (total)	200 W (at 50 °C ambient temperature)	
Weight	0.8 kg	
Half-power beam width	Frontal: 25 N (at 150 km/h) Lateral: 65 N (at 150 km/h) Rearside: 35 N (at 150 km/h)	
Max. wind velocity	200 km/h	
Packing size	422 x 212 x 95 mm	
Height/width/depth	312 / 55 / 188 mm	

Material:	Radiator: Tin-plated copper. Reflector: Weather-proof aluminum. Radome: High impact plastic, colour: Grey. All screws and nuts: Stainless steel.
Mounting:	Wall mounting: No additional mounting kit needed. For pipe mast mounting use clamps listed below (order separately).
Ice protection:	The radiating system is protected by the radome. Due to its very sturdy construction, the antenna remains operational even under icy conditions.
Grounding:	All metal parts of the antenna as well as the inner conductor are DC grounded.



800/900 VPol
1800/1900/2000 VPol

Accessories (order separately)

Type No.	Description	Remarks	Weight approx.	Units per antenna
734360	2 clamps	Mast: 34 – 60 mm diameter	60 g	1
734361	2 clamps	Mast: 60 – 80 mm diameter	70 g	1
734362	2 clamps	Mast: 80 – 100 mm diameter	80 g	1
734363	2 clamps	Mast: 100 – 120 mm diameter	90 g	1
734364	2 clamps	Mast: 120 – 140 mm diameter	110 g	1
734365	2 clamps	Mast: 45 – 125 mm diameter	80 g	1

Logarithmic Periodic Vertical Polarization Half-power Beam Width

790–2690

V

65°

KATHREIN
Antennen · Electronic

VPol LogPer 790–2690 65° 11dBi

Type No.	742192v01				
Frequency range	790 – 960 MHz	960 – 1710 MHz	1710 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz
VSWR	< 1.5	< 1.5	< 1.5	< 1.5	< 1.6
Gain	10.8 dBi	11.0 dBi	11.2 dBi	11.0 dBi	10.8 dBi
Impedance	50 Ω	50 Ω	50 Ω	50 Ω	50 Ω
Polarization	Vertical	Vertical	Vertical	Vertical	Vertical
Front-to-back ratio	> 25 dB	> 25 dB	> 25 dB	> 22 dB	> 25 dB
Half-power beam width horizontal vertical	65° 53°	60° 50°	55° 47°	50° 45°	50° 45°
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc	< –150 dBc	< –150 dBc	< –150 dBc
Max. power Total power	300 W	250 W	200 W	170 W	150 W
	500 W (at 50 °C ambient temperature)				
Input	1 x 7-16 female				
Connector position	Bottom				
Weight	5.5 kg				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 20 / 210 / 30 N				
Height/width/depth	300 / 155 / 785 mm				

- Material:** Radiator: Tin-plated copper. Reflector screen: Weather-proof aluminum.
Radome: Fiberglass, color: Grey.
All screws and nuts: Stainless steel
- Mounting:** The antenna can be mounted on tubular mast with a diameter of 30 – 70 mm with supplied clamps.
- Ice protection:** Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.
- Grounding:** All metal parts of the antenna as well as the inner conductor are DC grounded.



Panel

Vertical Polarization

Half-power Beam Width

790–960

V

65°

KATHREIN
Antennen · Electronic

VPol Panel 790–960 65° 18.5dBi

Type No.	730376v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	Vertical			
Gain	17.8 dBi	18.0 dBi	18.4 dBi	
Horizontal Pattern:				
Half-power beam width	68°	67°	65°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Vertical Pattern:				
Half-power beam width	7.4°	7.2°	6.8°	
Sidelobe suppression for first sidelobe above horizon	> 17 dB	> 17 dB	> 18 dB	
VSWR	< 1.5			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rear: 740 / 330 / 1270 N (at 150 km/h)			
Height/width/depth	2574 / 259 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	12 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			



800/900 VPol
1800/1900/2000 VPol

Panel

Vertical Polarization

Half-power Beam Width

790/872...960

V

90°

KATHREIN

Antennen · Electronic

VPol Panel 872–960 90° 7.5dBi

Type No.	736854
Frequency range	872 – 960 MHz
Polarization	Vertical
Gain	7.5 dBi
Half-power beam width	H-plane: 90° E-plane: 70°
Front-to-back ratio	> 20 dB
VSWR	< 1.5
Intermodulation IM3	< –140 dBc (2 x 43 dBm carrier)
Max. power	350 W (at 50 °C ambient temperature)
Input	N female
Connector position	Bottom or top
Weight	1.5 kg
Wind load (at 150 km/h)	Frontal / lateral / rearside: 45 / 20 / 60 N
Height/width/depth	262 / 155 / 49 mm



VPol Panel 790–960 90° 17dBi

Type No.	730378v02			clamps included
	790–960			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	
Polarization	Vertical			
Gain	16.6 dBi	16.7 dBi	17.0 dBi	
Horizontal Pattern:				
Half-power beam width	90°	90°	90°	
Front-to-back ratio (180°±30°)	> 22 dB	> 22 dB	> 22 dB	
Vertical Pattern:				
Half-power beam width	7.1°	6.9°	6.6°	
Sidelobe suppression for first sidelobe above horizon	> 12 dB	> 12 dB	> 12 dB	
Impedance	50 Ω			
VSWR	< 1.5			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			
Input	7-16 female			
Connector position	Rearside			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 930 / 410 / 1270 N			
Height/width/depth	2574 / 259 / 99 mm			
Category of mounting hardware	H (Heavy)			
Weight	12 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			



Panel Vertical Polarization Half-power Beam Width

870–960

V

120°

KATHREIN
Antennen · Electronic

VPol Panel 870–960 120° 16dBi

Type No.	730382
Frequency range	870 – 960 MHz
Polarization	Vertical
Gain	16 dBi
Half-power beam width	H-plane: 120° E-plane: 6.5°
Front-to-back ratio	> 20 dB
VSWR	< 1.3
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	500 W (at 50 °C ambient temperature)
Input	7-16 female
Connector position	Rearside
Weight	12 kg
Wind load (at 150 km/h)	Frontal / lateral / rearside: 740 / 330 / 1270 N
Height/width/depth	2574 / 258 / 103 mm



800/900 VPol
1800/1900/2000 VPol

Multi-band Antenna

Vertical Polarization

Half-power Beam Width

1710–2180

V

12°

KATHREIN

Antennen · Electronic

VPol Panel 1710–2180 12° 18.5dBi 0°T

Type No.	80010368		
	1710–2180		
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz
Polarization	Vertical	Vertical	Vertical
Gain	18.1 dBi	18.4 dBi	18.7 dBi
Horizontal Pattern:			
Half-power beam width	13.3°	12.8°	12°
Front-to-back ratio (180°±30°)	> 30 dB	> 30 dB	> 30 dB
Sidelobe suppression	> 18 dB	> 18 dB	> 17 dB
Vertical Pattern:			
Half-power beam width	37°	36°	36°
Electrical tilt	0°, fixed		
Sidelobe suppression for first sidelobe above main beam	> 18 dB	> 18 dB	> 18 dB
VSWR	< 1.5		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	300 W (at 50 °C ambient temperature)		
Input	1 x 7-16 female		
Connector position	Side (see picture)		
Wind load (at 150 km/h)	Frontal / lateral / rearside: 340 / 25 / 400 N		
Height/width/depth	299 / 743 / 69 mm		
Weight	9 kg		



Dual-band Panel

Vertical Polarization

Half-power Beam Width

824–960

1710–2170

V

V

90°


82°

KATHREIN

Antennen · Electronic

VVPol Panel 824–960/1710–2170 C 90°/82° 7/7dBi



Type No.	742290	
Frequency range	824 – 960 MHz	1710 – 2170 MHz
Polarization	Vertical	Vertical
Gain	7 dBi	7 dBi
Half-power beam width	Horizontal: 90° Vertical: 60°	Horizontal: 82° Vertical: 70°
Front-to-back ratio	> 18 dB	> 20 dB
VSWR	< 1.7 (824 – 960 MHz) < 1.5 (870 – 960 MHz)	< 1.7 (1710 – 2170 MHz) < 1.5 (1710 – 1990 MHz)
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc
Max. power	100 W (at 50 °C ambient temperature)	
Input	1 x 7-16 female	
Connector position	Bottom or top	
Weight	2.8 kg	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 90 / 23 / 100 N	
Height/width/depth	328 / 155 / 69 mm	

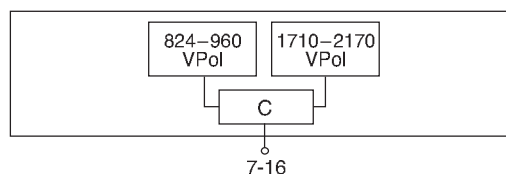

800/900 VPol
1800/1900/2000 VPol

VVPol Panel 824–960/1710–2170 C 90°/82° 10/11dBi

Type No.	80010046	
Frequency range	824 – 960 MHz	1710 – 2170 MHz
Polarization	Vertical	Vertical
Gain	10 dBi	11 dBi
Half-power beam width	Horizontal: 90° Vertical: 33°	Horizontal: 82° Vertical: 19°
Front-to-back ratio	> 18 dB	> 20 dB
VSWR	< 1.7 (824 – 960 MHz) < 1.5 (870 – 960 MHz)	< 1.5
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc
Max. power	100 W (at 50 °C ambient temperature)	
Input	1 x 7-16 female	
Connector position	Bottom or top	
Weight	5 kg	
Wind load (at 150 km/h)	Frontal / lateral / rearside: 175 / 47 / 200 N	
Height/width/depth	662 / 155 / 69 mm	

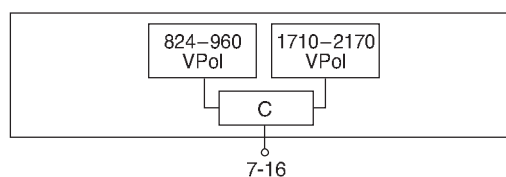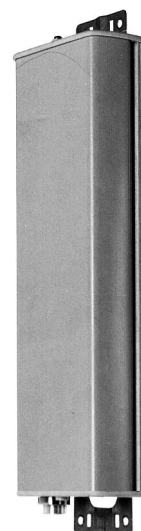

Summary – Directional Antennas

Dual Polarization +45°/–45°

1800/1900/2000/2600

Dual Polarization +45°/–45°

Type	Type No.	Height [mm]	Connector position	Page
XPol Panel 1710–2170 30° 20dBi 0°–12°T	80010251v01	1032	bottom	66
XPol Panel 1710–2170 30° 21dBi 0°–8°T	742351v01	1304	bottom	66
XPol Panel 1710–2170 45° 19.5dBi 0°–8°T	742218v01	1306	bottom	67
XPol Panel 1710–2170 45° 21.5dBi 0°–6°T	742219v01	1946	bottom	67
XPol Panel 1710–2170 65° 9dBi 0°T	742210v01	155	bottom or top	68
XPol Panel 1710–2170 65° 12dBi 2°T	739489v01	342	bottom	68
XPol Panel 1710–2690 65° 12dBi 4°T	80010761	278	bottom	69
XPol Panel 1710–2170 65° 16dBi 0°T	742196v01	735	bottom or top	69
XPol Panel 1710–2200 65° 15.5dBi 0°–12°T	80010247v01	735	bottom	70
XPol Panel 1710–2690 65° 16.5dBi 0°–12°T	80010681	851	bottom	71
XPol Panel 1710–2200 65° 18.3dBi 0°T	80010425v01	1302	bottom	72
XPol Panel 1710–2200 65° 18.3dBi 2°T	80010426v01	1302	bottom	72
XPol Panel 1710–2200 65° 18dBi 6°T	80010428v01	1302	bottom	73
XPol Panel 1710–2170 65° 18dBi 0°–8°T	742214v01	1142	bottom	73
XPol Panel 1710–2200 65° 18dBi 0°–10°T	742215v01	1314	bottom	74
XPol Panel 1710–2200 65° 18dBi 2°–10°T ESLS	80010614v01	1314	bottom	74
XPol Panel 1710–2200 65° 18dBi 0°–15°T ESLS	80010504v01	1387	bottom	75
XPol Panel 1710–2690 65° 18dBi 0°–12°T ESLS	80010621v01	1410	bottom	76
XPol Panel 1710–2200 65° 19.5dBi 0°–6°T	742213v01	1954	bottom	77
XPol Panel 1710–2200 65° 19dBi 0°–10°T ESLS	80010505v01	1984	bottom	78
XPol Panel 1710–2200 62° 19dBi 0°–8°T HE	80010636	1407	bottom	79
XPol Panel 1710–2690 65° 19dBi 0°–6°T	80010651	1670	bottom	80
XPol Panel 1710–2200 65° 21dBi 0°T HE	80010439v01	2172	bottom or top	81
XPol Panel 1710–2200 62° 21.2dBi 0°–6°T HE	80010378	2548	bottom	81
XPol Panel 1710–2170 90° 11.5dBi 0°T	741984v01	342	bottom or top	82
XPol Panel 1710–2170 90° 14dBi 0°–10°T	741988v01	662	bottom	82
XPol Panel 1710–2200 90° 17dBi 0°–8°T	741989v01	1302	bottom	83
XPol Panel 1710–2170 90° 18dBi 0°–6°T	741990v01	1942	bottom	83

Antennas with Dual-Beam

XXPol Panel 1710–2200 40° (–30°) 17dBi 2°–14°T	80010605	698	bottom	84
1710–2200 40° (+30°) 17dBi 2°–14°T				
XXPol Panel 1710–2200 45° (–30°) 19.5dBi 0°–10°T	80010606v01	1314	bottom	85
1710–2200 45° (+30°) 19.5dBi 0°–10°T				

New or changed product

Abbreviations:

ESLS: Enhanced Side Lobe Suppression (above or below horizon)
HE: High Efficiency (Antennas with high gain compared to length)

Summary – Directional Antennas

Dual Polarization +45°/–45°

1800/1900/2000/2600

Antennas with integrated RET

Type	Type No.	Height [mm]	Connector position	Page
XPol Panel IRT	1710–2200 65° 18dBi 0°–10°T 80010618v01	1302	bottom	86

Tri-Sector Pipe Antenna

XPol Tri-Sector Pipe	1710–2170 65° 15.5dBi 0°–12°T	80010375	1241	bottom	87
XPol Tri-Sector Pipe	1710–2170 65° 18dBi 0°–10°T	80010360	1823	bottom	88
Flexible Sealing Frame		85010010			89

Further types on request.
Please contact:
mobilcom@kathrein.de

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

30°

KATHREIN

Antennen · Electronic

XPoI Panel 1710–2170 30° 20dBi 0°–12°T

Type No.	80010251v01			clamps included
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 19.2 dBi	2 x 19.5 dBi	2 x 19.8	
Horizontal Pattern:				
Half-power beam width	36°	35°	33°	
Front-to-back ratio, copolar (180°±30°)	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio				
Maindirection 0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Sidelobe suppression	> 18 dB	> 17 dB	> 15 dB	
Tracking, Avg.		1.0 dB		
Squint		±1.0°		
Vertical Pattern:				
Half-power beam width	9.2°	9°	8.5°	
Electrical tilt	0°–12°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 6° ... 12° T 15 ... 17 ... 17 dB	0° ... 6° ... 12° T 15 ... 17 ... 17 dB	0° ... 6° ... 12° T 15 ... 17 ... 17 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 420 / 110 / 520 N			
Height/width/depth	1032 / 299 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	12 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



XPoI Panel 1710–2170 30° 21dBi 0°–8°T

Type No.	742351v01			clamps included
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 20.2 dBi	2 x 20.5 dBi	2 x 20.7	
Horizontal Pattern:				
Half-power beam width	36°	35°	33°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio				
Maindirection 0°	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Sidelobe suppression	> 14 dB	> 14 dB	> 14 dB	
Tracking, Avg.		0.5 dB		
Squint		±1.0°		
Vertical Pattern:				
Half-power beam width	7.4°	7.0°	6.7°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° T 18 ... 17 ... 16 dB	0° ... 4° ... 8° T 18 ... 18 ... 17 dB	0° ... 4° ... 8° T 18 ... 17 ... 16 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 540 / 135 / 640 N			
Height/width/depth	1304 / 299 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	14 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



Multi-band Panel

Dual Polarization

Half-power Beam Width

1710–2170

X

45°

KATHREIN
Antennen · Electronic

XPoI Panel 1710–2170 45° 19.5dBi 0°–8°T

Type No.	742218v01			clamps included
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 19 dBi	2 x 19.5 dBi	2 x 19.6 dBi	
Horizontal Pattern:				
Half-power beam width	47°	45°	44°	
Front-to-back ratio (180°±30°)	Copolar: > 27 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 27 dB Total power: > 25 dB	
Cross polar ratio				
Maindirection 0°	Typically: 18 dB	Typically: 18 dB	Typically: 18 dB	
Sector ±30°	> 13 dB	> 13 dB	> 13 dB	
Sidelobe suppression	> 18 dB	> 18 dB	> 18 dB	
Tracking, Avg.		0.5 dB		
Squint		±1.5°		
Vertical Pattern:				
Half-power beam width	7.3°	7.0°	6.7°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 2° ... 5° ... 8° T 17 ... 17 ... 15 ... 15 dB	0° ... 2° ... 5° ... 8° T 18 ... 18 ... 17 ... 17 dB	0° ... 2° ... 5° ... 8° T 18 ... 18 ... 15 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 450 / 145 / 490 N			
Height/width/depth	1306 / 199 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	11 kg / 13 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

XPoI Panel 1710–2170 45° 21.5dBi 0°–6°T

Type No.	742219v01			clamps included
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	20.5 ... 20.6 ... 20.3	20.9 ... 21.1 ... 20.9	21 ... 21.4 ... 21	
Tilt	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:				
Half-power beam width	48°	45°	44°	
Front-to-back ratio (180°±30°)	Copolar: > 28 dB Total power: > 25 dB	Copolar: > 27 dB Total power: > 25 dB	Copolar: > 25 dB Total power: > 25 dB	
Cross polar ratio				
Maindirection 0°	Typically: 19 dB	Typically: 18 dB	Typically: 17 dB	
Sector ±30°	> 13 dB	> 13 dB	> 13 dB	
Sidelobe suppression	> 18 dB	> 18 dB	> 18 dB	
Tracking, Avg.		1.0 dB		
Squint		±2.0°		
Vertical Pattern:				
Half-power beam width	4.7°	4.5°	4.4°	
Electrical tilt	0°–6°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 16 ... 16 dB	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 17 ... 16 dB	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 17 ... 16 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 700 / 220 / 740 N			
Height/width/depth	1946 / 199 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	14 kg / 16 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

For more information about additional mounting accessories please refer to page 205



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

65°

KATHREIN

Antennen · Electronic

XPoI Panel 1710–2170 65° 9dBi 0°T

Type No.	742210v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 8.5 dBi	2 x 8.6 dBi	2 x 8.7 dBi	
Horizontal Pattern:				
Half-power beam width	70°	68°	65°	
Front-to-back ratio, copolar	> 25 dB	> 30 dB	> 27 dB	
Cross polar ratio				
Maindirection	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB			
Squint	±3.0°			
Vertical Pattern:				
Half-power beam width	65°	65°	63°	
Electrical tilt	0°, fixed	0°, fixed	0°, fixed	
VSWR				
< 1.4				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
150 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom or top				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 50 / 13 / 55 N				
Height/width/depth				
155 / 155 / 69 mm				
Category of mounting hardware				
L (Light)				
Weight				
1.5 kg (tension bands incl.)				
Scope of supply				
Panel and 1 unit of tension bands for 45 – 125 mm diameter				



XPoI Panel 1710–2170 65° 12dBi 2°T

Type No.	739489v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 11.5 dBi	2 x 12 dBi	2 x 12 dBi	
Horizontal Pattern:				
Half-power beam width	67°	65°	63°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 27 dB	
Cross polar ratio				
Maindirection	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	32°	30°	28°	
Electrical tilt	3°, fixed	2°, fixed	0°, fixed	
VSWR				
< 1.4				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
150 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 90 / 27 / 105 N				
Height/width/depth				
342 / 155 / 69 mm				
Category of mounting hardware				
L (Light)				
Weight				
2.2 kg (tension bands incl.)				
Scope of supply				
Panel and 1 unit of tension bands for 45 – 125 mm diameter				



Multi-band Panel Dual Polarization Half-power Beam Width

1710...2690

X

65°

KATHREIN
Antennen · Electronic

XPol Panel 1710–2690 65° 12dBi 4°T

Type No.	80010761				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 11 dBi	2 x 11.5 dBi	2 x 12.2 dBi	2 x 12.7 dBi	
Horizontal Pattern:					
Half-power beam width	67°	65°	60°	58°	
Front-to-back ratio, copolar	> 30 dB	> 28 dB	> 28 dB	> 28 dB	
Cross polar ratio					
Maindirection	Typically: > 20 dB	Typically: > 20 dB	Typically: > 20 dB	Typically: > 20 dB	
Sector	±60° > 8 dB	> 8 dB	> 8 dB	> 8 dB	
Vertical Pattern:					
Half-power beam width	36°	31°	25°	25°	
Electrical tilt	3°, fixed	3°, fixed	4°, fixed	4°, fixed	
VSWR	< 1.5				
Isolation, between ports	> 28 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	150 W (at 50 °C ambient temperature)				
Input	2 x 7-16 female				
Connector position	Bottom				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 75 / 17 / 75 N				
Height/width/depth	278 / 154 / 69 mm				
Category of mounting hardware	L (Light)				
Weight	0.4 kg (tension bands incl.)				
Scope of supply	Panel and 1 unit of tension bands for 45 – 125 mm diameter				



1800/1900/200/2600
XPol

XPol Panel 1710–2170 65° 16dBi 0°T

Type No.	742196v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 15.3 dBi	2 x 15.6 dBi	2 x 15.8 dBi	
Horizontal Pattern:				
Half-power beam width	67°	66°	64°	
Front-to-back ratio (180°±30°)	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	
Cross polar ratio				
Maindirection	0°			
Sector	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	12.6°	11.8°	11°	
Sidelobe suppression for first sidelobe above horizon	> 14 dB	> 16 dB	> 14 dB	
VSWR	< 1.4			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom or top			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 185 / 65 / 220 N			
Height/width/depth	735 / 155 / 69 mm			
Category of mounting hardware	L (Light)			
Weight	4.5 kg (tension bands incl.)			
Scope of supply	Panel and 1 unit of tension bands for 45 – 125 mm diameter			



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2200 65° 15.5dBi 0°–12°T

Type No.	80010247v01			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain per input (dBi)	0° ... 4° ... 8° ... 12° T 15.5 ... 15.4 ... 15.3 ... 15.1	0° ... 4° ... 8° ... 12° T 15.6 ... 15.5 ... 15.4 ... 15.0	0° ... 4° ... 8° ... 12° T 15.8 ... 15.7 ... 15.5 ... 14.9	
Horizontal Pattern:				
Half-power beam width	67°	66°	64°	
Front-to-back ratio	Copolar: > 27 dB	Copolar: > 27 dB	Copolar: > 27 dB	
Cross polar ratio				
Maindirection	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB	
Sector	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	12.9°	12.3°	11.5°	
Electrical tilt	0°–12°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° ... 12° T > 14 ... 14 ... 14 ... 14 dB	0° ... 4° ... 8° ... 12° T > 14 ... 14 ... 14 ... 14 dB	0° ... 4° ... 8° ... 12° T > 14 ... 14 ... 14 ... 14 dB	
Impedance	50 Ω			
VSWR	< 1.4			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 195 / 70 / 220 N			
Height/width/depth	735 / 155 / 69 mm			
Category of mounting hardware	L (Light)			
Weight	4.5 kg (tension bands incl.)			
Scope of supply	Panel and 1 unit of tension bands for 45 – 125 mm diameter			



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2690 65° 16.5dBi 0°–12°T

Type No.	80010681				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 15.5 dBi	2 x 16.3 dBi	2 x 16.7 dBi	2 x 16.7 dBi	
Horizontal Pattern:					
Half-power beam width	67°	64°	60°	60°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 23 dB	> 23 dB	
Cross polar ratio Sector 0° ±60°	Typically: 25 dB > 10 dB	Typically: 28 dB > 8 dB	Typically: 28 dB > 8 dB	Typically: 28 dB > 11 dB	
Vertical Pattern:					
Half-power beam width	10.8°	9.9°	8.8°	8.4°	
Electrical tilt	0°–12°, continuously adjustable				
Sidelobe suppression – for first sidelobe above main beam	0° ... 6° ... 12° T ≥ 12 ... 13 ... 15 dB	0° ... 6° ... 12° T ≥ 13 ... 14 ... 15 dB	0° ... 6° ... 12° T ≥ 13 ... 14 ... 16 dB	0° ... 6° ... 12° T ≥ 15 ... 15 ... 17 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	250 W (at 50 °C ambient temperature)				
Input	2 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	1 x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 210 / 60 / 220 N				
Height/width/depth	851 / 155 / 70 mm				
Category of mounting hardware	L (Light)				
Weight	5 kg / 5.2 kg (clamps incl.)				
Scope of supply	Panel and 1 unit of tension bands for 45 – 125 mm diameter				



1800/1900/200/2600
XPol

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPoL Panel 1710–2200 65° 18.3dBi 0°T

Type No.	80010425v01			clamps included
Frequency range	1710 – 1880 MHz	1710–2200 1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°		+45°, –45°
Gain	2 x 17.9 dBi	2 x 18.1 dBi		2 x 18.3 dBi
Horizontal Pattern:				
Half-power beam width	67°	66°		64°
Front-to-back ratio, copolar	> 30 dB	> 30 dB		> 30 dB
Cross polar ratio Sector 0° ±60°	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB		Typically: 20 dB > 10 dB
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	6.6°	6.2°		5.8°
Electrical tilt	0°, fixed			
Sidelobe supsession for first sidelobe above main beam	> 14 dB	> 15 dB		> 16 dB
First null-fill below main beam	Typically: 25 dB	Typically: 25 dB		Typically: 25 dB
VSWR				
< 1.4				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
300 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 330 / 115 / 390 N				
Height/width/depth				
1302 / 155 / 69 mm				
Category of mounting hardware				
M (Medium)				
Weight				
7 kg / 9 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				



XPoL Panel 1710–2200 65° 18.3dBi 2°T

Type No.	80010426v01			clamps included
Frequency range	1710 – 1880 MHz	1710–2200 1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°		+45°, –45°
Gain	2 x 17.9 dBi	2 x 18.1 dBi		2 x 18.3 dBi
Horizontal Pattern:				
Half-power beam width	66°	65°		63°
Front-to-back ratio, copolar	> 28 dB	> 30 dB		> 33 dB
Cross polar ratio Sector 0° ±60°	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB		Typically: 20 dB > 10 dB
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	6.6°	6.2°		5.8°
Electrical tilt	2°, fixed			
Sidelobe supression for first sidelobe above main beam	> 14 dB	> 15 dB		> 15 dB
First null-fill below main beam	Typically: 25 dB	Typically: 25 dB		Typically: 25 dB
VSWR				
< 1.4				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
300 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 330 / 115 / 390 N				
Height/width/depth				
1302 / 155 / 69 mm				
Category of mounting hardware				
M (Medium)				
Weight				
7 kg / 9 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				



Multi-band Panel Dual Polarization Half-power Beam Width

1710...2200

X

65°

KATHREIN
Antennen · Electronic

XPoI Panel 1710–2200 65° 18dBi 6°T

Type No.	80010428v01			clamps included
Frequency range	1710 – 1880 MHz	1710–2200 1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°		+45°, –45°
Gain	2 x 17.7 dBi	2 x 17.9 dBi		2 x 18.1 dBi
Horizontal Pattern:				
Half-power beam width	67°	65°		63°
Front-to-back ratio, copolar	> 27 dB	> 33 dB		> 33 dB
Cross polar ratio Sector 0° ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB		Typically: 25 dB > 10 dB
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	6.7°	6.3°		5.8°
Electrical tilt	6°, fixed			
Sidelobe supsression for first sidelobe above main beam	> 14 dB	> 14 dB		> 15 dB
First null-fill below main beam	Typically: 25 dB	Typically: 25 dB		Typically: 25 dB
VSWR				
< 1.3				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
300 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 330 / 115 / 390 N				
Height/width/depth				
1302 / 155 / 69 mm				
Category of mounting hardware				
M (Medium)				
Weight				
7 kg / 9 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				



1800/1900/200/2600
XPoI

XPoI Panel 1710–2170 65° 18dBi 0°–8°T

Type No.	742214v01			clamps included
Frequency range	1710 – 1880 MHz	1710–2170 1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 17.5 dBi	2 x 17.7 dBi	2 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	66°	64°	62°	
Front-to-back ratio	Copolar: 30 dB	Copolar: 30 dB	Copolar: 30 dB	
Cross polar ratio				
Maindirection0°	Avg.: 25 dB	Avg.: 25 dB	Avg.: 28 dB	
Sector±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	8.3°	7.8°	7.4°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe supression for first sidelobe above horizon, Avg.	0° ... 4° ... 8° T 20 ... 20 ... 20 dB	0° ... 4° ... 8° T 20 ... 20 ... 20 dB	0° ... 4° ... 8° T 20 ... 20 ... 20 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 290 / 80 / 300 N			
Height/width/depth	1142 / 155 / 70 mm			
Category of mounting hardware	L (Light)			
Weight	4.5 kg / 6.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPoL Panel 1710–2200 65° 18dBi 0°–10°T

Type No.	742215v01			clamps included
Frequency range	1710 – 1880 MHz		1850 – 1990 MHz	1920 – 2200 MHz
Polarization	+45°, –45°		+45°, –45°	+45°, –45°
Gain (dBi)	17.7 ... 17.8 ... 17.6		18.0 ... 18.2 ... 17.9	18.1 ... 18.2 ... 18.0
Tilt	0° ... 5° ... 10°		0° ... 5° ... 10°	0° ... 5° ... 10°
Horizontal Pattern:				
Half-power beam width	68°		66°	64°
Front-to-back ratio (180°±30°)	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB
Cross polar ratio				
Maindirection	0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB
Sector	±60°	> 10 dB	> 10 dB	> 10 dB
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	7.1°	6.8°	6.4°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 17 ... 17 dB
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 330 / 90 / 340 N			
Height/width/depth	1314 / 154 / 70 mm			
Category of mounting hardware	L (Light)			
Weight	5.2 kg / 7.2 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



XPoL Panel 1710–2200 65° 18dBi 2°–10°T ESLS

Type No.	80010614v01			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 17.3 dBi	2 x 17.7 dBi	2 x 18	
Horizontal Pattern:				
Half-power beam width	66°	64°	62°	
Front-to-back ratio (180°±30°)	≥ 25 dB	≥ 25 dB	≥ 25 dB	
Cross polar ratio	0°	25 dB	25 dB	
Sector	±60°	≥ 10 dB	≥ 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	7.9°	7.5°	7.2°	
Electrical tilt	2°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	> 15 dB	> 17 dB	> 18 dB	
Sidelobe suppression in the sector 40°–180° below horizon for TX-Frequencies	> 23 dB	> 24 dB	> 25 dB	
VSWR				
< 1.5				
Isolation, between ports				
> 30 dB				
Intermodulation IM3				
< –150 dBc (2 x 43 dBm carrier)				
Max. power per input				
300 W (at 50 °C ambient temperature)				
Input				
2 x 7-16 female				
Connector position				
Bottom				
Adjustment mechanism				
1 x, Position bottom continuously adjustable				
Wind load (at 150 km/h)				
Frontal / lateral / rearside: 330 / 90 / 340 N				
Height/width/depth				
1314 / 155 / 70 mm				
Category of mounting hardware				
L (Light)				
Weight				
7 kg / 9 kg (clamps incl.)				
Scope of supply				
Panel and 2 units of clamps for 50 – 115 mm diameter				



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2200 65° 18dBi 0°–15°T ESLS

Type No.	80010504v01				clamps included
	1710–2200				
Frequency range	1710 – 1880 MHz	1880 – 1990 MHz	1920 – 2170 MHz	2000 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 17.5 dBi	2 x 17.6 dBi	2 x 17.7 dBi	2 x 17.8 dBi	
Horizontal Pattern:					
Half-power beam width	68°	66°	64°	62°	
Front-to-back ratio (180°±30°)	≥ 25 dB	≥ 25 dB	≥ 25 dB	≥ 25 dB	
Cross polar ratio	22 dB	22 dB	24 dB	26 dB	
Sector	±60°	≥ 10 dB	≥ 10 dB	≥ 10 dB	
Tracking, Avg.	1.0 dB				
Squint	±2.0°				
Vertical Pattern:					
Half-power beam width	7.9°	7.5°	7.2°	7.0°	
Electrical tilt	0°–15°, continuously adjustable				
Sidelobe suppression	0° ... 5° ... 10° ... 15° T	0° ... 5° ... 10° ... 15° T	0° ... 5° ... 10° ... 15° T	0° ... 5° ... 10° ... 15° T	
– for first sidelobe above main beam	≥ 17 ... 20 ... 18 ... 17 dB	≥ 16 ... 20 ... 18 ... 17 dB	≥ 16 ... 20 ... 18 ... 17 dB	≥ 15 ... 20 ... 18 ... 15 dB	
– within 0°–20° sector above horizon	≥ 16 ... 18 ... 18 ... 16 dB	≥ 16 ... 18 ... 17 ... 16 dB	≥ 15 ... 18 ... 17 ... 16 dB	≥ 15 ... 16 ... 16 ... 15 dB	
Null-fill at 0° tilt	21 dB	20 dB	19 dB	18 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	2 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	1 x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 360 / 100 / 370 N				
Height/width/depth	1387 / 155 / 69 mm				
Category of mounting hardware	L (Light)				
Weight	6.5 kg / 8.5 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

1800/1900/200/2600
XPol



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2690 65° 18dBi 0°–12°T ESLS

Type No.	80010621 v01				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	17.4 ... 17.4 ... 17.3	18.2 ... 18.0 ... 17.9	18.2 ... 18.1 ... 17.7	18.3 ... 18.0 ... 17.6	
Tilt	0° ... 6° ... 12°	0° ... 6° ... 12°	0° ... 6° ... 12°	0° ... 6° ... 12°	
Horizontal Pattern:					
Half-power beam width	68°	64°	61°	60°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio Sector 0° ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	
Tracking, Avg.	1.0 dB				
Vertical Pattern:					
Half-power beam width	7.1°	6.5°	5.9°	5.7°	
Electrical tilt	0°–12°, continuously adjustable				
Sidelobe suppression – for first sidelobe above main beam – within 0°–20° sector above horizon	0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB ≥ 17 ... 17 ... 16 dB	0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB ≥ 17 ... 17 ... 16 dB	0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB ≥ 16 ... 18 ... 17 dB	0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB ≥ 17 ... 17 ... 17 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	400 W (at 50 °C ambient temperature)				
Input	2 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	1 x, Position bottom continuously adjustable				
Wind loa (at 150 km/h)	Frontal / lateral / rearside: 370 / 135 / 420 N				
Height/width/depth	1410 / 164 / 70 mm				
Category of mounting hardware	M (Medium)				
Weight	6.5 kg / 8.5 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter				



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2200 65° 19.5dBi 0°–6°T

Type No.	742213v01			clamps included
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 19 dBi	2 x 19.2 dBi	2 x 19.5 dBi	
Horizontal Pattern:				
Half-power beam width	67°	65°	63°	
Front-to-back ratio (180°±30°)	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	
Cross polar ratio Maindirection 0° Sector ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	4.7°	4.5°	4.3°	
Electrical tilt	0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 16 ... 15 dB	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 17 ... 16 dB	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 18 ... 18 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 510 / 140 / 510 N			
Height/width/depth	1954 / 155 / 70 mm			
Category of mounting hardware	M (Medium)			
Weight	9 kg / 11 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



1800/1900/200/2600
XPol

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2200 65° 19dBi 0°–10°T ESLS

Type No.	80010505v01				clamps included
	1710–2200				
Frequency range	1710 – 1880 MHz	1880 – 1990 MHz	1920 – 2170 MHz	2000 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average Gain (dBi)	18.5 ... 18.7 ... 18.5	18.7 ... 19.0 ... 18.5	18.7 ... 19.0 ... 18.4	18.7 ... 18.9 ... 18.3	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:					
Half-power beam width	67°	65°	64°	63°	
Front-to-back ratio (180°±30°)	≥ 30 dB	≥ 30 dB	≥ 27 dB	≥ 26 dB	
Cross polar ratio Sector 0° ±60°	Typically: 25 dB ≥ 11 dB	Typically: 22 dB ≥ 11 dB	Typically: 22 dB ≥ 11 dB	Typically: 22 dB ≥ 10 dB	
Tracking, Avg.	0.5 dB				
Squint	±2.5°				
Vertical Pattern:					
Half-power beam width	5.0°	4.8°	4.6°	4.4°	
Electrical tilt	0°–10°, continuously adjustable				
Sidelobe suppression – for first sidelobe above main beam – within 0°–20° sector above horizon	0° ... 4° ... 8° ... 10° T ≥ 20 ... 20 ... 18 ... 18 dB ≥ 18 ... 18 ... 17 ... 17 dB	0° ... 4° ... 8° ... 10° T ≥ 20 ... 20 ... 18 ... 18 dB ≥ 17 ... 18 ... 17 ... 15 dB	0° ... 4° ... 8° ... 10° T ≥ 19 ... 20 ... 18 ... 18 dB ≥ 17 ... 17 ... 17 ... 15 dB	0° ... 4° ... 8° ... 10° T ≥ 18 ... 20 ... 18 ... 18 dB ≥ 17 ... 17 ... 14 ... 12 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	2 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	1 x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 520 / 190 / 630 N				
Height/width/depth	1984 / 155 / 69 mm				
Category of mounting hardware	M (Medium)				
Weight	11 kg / 13 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

62°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2200 62° 19dBi 0°–8°T

Type No.	80010636			clamps included
Frequency range	1710 – 1880 MHz	1710 – 2200 1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°		+45°, –45°
Gain	2 x 18.3 dBi	2 x 18.7 dBi		2 x 19
Horizontal Pattern:				
Half-power beam width	65°	62°		59°
Front-to-back ratio (180°±30°)	> 30 dB	> 30 dB		> 28 dB
Cross polar ratio Maindirection Sector	0° Typically: 25 dB ±60° > 10 dB	Typically: 25 dB > 10 dB		Typically: 25 dB > 10 dB
Tracking, Avg.	0.5 dB			
Squint	±1.5°			
Vertical Pattern:				
Half-power beam width	6.6°	6.2°		5.9°
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam	0° ... 4° ... 8° T 18 ... 14 ... 14 dB	0° ... 4° ... 8° T 18 ... 15 ... 15 dB		0° ... 4° ... 8° T 18 ... 15 ... 15 dB
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 360 / 100 / 370 N			
Height/width/depth	1407 / 155 / 70 mm			
Category of mounting hardware	L (Light)			
Weight	7 kg / 9 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



1800/1900/200/2600
XPol

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2690 65° 19dBi 0°–6°T

Type No.	80010651				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2170 MHz	2170 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 18.5 dBi	2 x 19.0 dBi	2 x 19.4 dBi	2 x 19.5 dBi	
Horizontal Pattern:					
Half-power beam width	67°	63°	60°	58°	
Front-to-back ratio (180°±30°)	> 28 dB	> 28 dB	> 25 dB	> 25 dB	
Cross polar ratio Sector 0° ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 28 dB > 10 dB	
Tracking, Avg.	1.5 dB				
Squint	±3°				
Vertical Pattern:					
Half-power beam width	5.4°	4.9°	4.3°	4.0°	
Electrical tilt	0°–6°, continuously adjustable				
Sidelobe supression for first sidelobe above main beam	0° ... 3° ... 6° T ≥ 18 ... 18 ... 17 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 17 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	2 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	1x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 430 / 115 / 440 N				
Height/width/depth	1670 / 155 / 70 mm				
Category of mounting hardware	M (Medium)				
Weight	7 kg / 9 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter				



Panel

Dual Polarization

Half-power Beam Width

1710–2200

X

65°

KATHREIN

Antennen · Electronic

XPol Panel 1710–2200 65° 21dBi 0°T

Type No.	80010439v01				clamps included
	1710–2200				
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2000 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 20.5 dBi	2 x 20.8 dBi	2 x 21.1 dBi	2 x 21.2 dBi	
Horizontal Pattern:					
Half-power beam width	66°	63°	60°	58°	
Front-to-back ratio (180°±30°)	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	25 dB	23 dB	23 dB	23 dB	
Sector	> 12 dB	> 12 dB	> 10 dB	> 10 dB	
Tracking, Avg.	0.5 dB				
Squint	±1.5°				
Vertical Pattern:					
Half-power beam width	4.2°	4°	3.7°	3.6°	
Electrical tilt	0°, fixed				
Sidelobe suppression	> 15 dB				
– for first sidelobe above main beam	> 15 dB				
– within 0°–30° sector above horizon	> 15 dB				
First null-fill below main beam	< 20 dB				
VSWR					
< 1.5					
Isolation, between ports					
> 30 dB					
Intermodulation IM3					
< –150 dBc (2 x 43 dBm carrier)					
Max. power per input					
300 W (at 50 °C ambient temperature)					
Input					
2 x 7-16 female					
Connector position					
Bottom or top					
Wind load (at 150 km/h)					
Frontal / lateral / rearside: 550 / 210 / 610 N					
Height/width/depth					
2172 / 155 / 89 mm					
Category of mounting hardware					
M (Medium)					
Weight					
11.5 kg / 13.5 kg (clamps incl.)					
Scope of supply					
Panel and 2 units of clamps for 50 – 115 mm diameter					

XPol Panel 1710–2200 62° 21.2dBi 0°–6°T

Type No.	80010378			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 20.6 dBi	2 x 21.1 dBi	2 x 21.2	
Horizontal Pattern:				
Half-power beam width	65°	62°	60°	
Front-to-back ratio (180°±30°)	> 30 dB	> 28 dB	> 28 dB	
Cross polar ratio 0°	25 dB	23 dB	23 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	3.7°	3.5°	3.3°	
Electrical tilt	0°–6°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 3° ... 6° T 18 ... 18 ... 17 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 17 ... 17 ... 17 dB	
Null-fill at 0° tilt	20 dB	20 dB	20 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 660 / 260 / 730 N			
Height/width/depth	2548 / 155 / 89 mm			
Category of mounting hardware	M (Medium)			
Weight	13 kg / 15 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170

X

90°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2170 90° 11.5dBi

Type No.	741984v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 11.3 dBi	2 x 11.5 dBi	2 x 11.6 dBi	
Horizontal Pattern:				
Half-power beam width	86°	87°	88°	
Front-to-back ratio (180°±30°)	Copolar: > 23 dB Total power: > 23 dB	Copolar: > 23 dB Total power: > 23 dB	Copolar: > 23 dB Total power: > 23 dB	
Cross polar ratio Maindirection Sector	0° ±60° Typically: 20 dB > 18 dB	Typically: 25 dB > 18 dB	Typically: 20 dB > 15 dB	
Tracking, Avg.	0.5 dB			
Squint	±3.0°			
Vertical Pattern:				
Half-power beam width	28°	26°	26°	
Sidelobe supression vertical sector ±45°	> 20 dB	> 20 dB	> 20 dB	
VSWR	< 1.4			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	150 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom or top			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 90 / 27 / 105 N			
Height/width/depth	342 / 155 / 69 mm			
Category of mounting hardware	L (Light)			
Weight	2 kg (tension bands incl.)			
Scope of supply	Panel and 1 unit of tension bands for 45 – 125 mm diameter			



XPoL Panel 1710–2170 90° 14dBi 0°–10°T

Type No.	741988v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 13.7 dBi	2 x 14 dBi	2 x 14.1	
Horizontal Pattern:				
Half-power beam width	88°	88°	88°	
Front-to-back ratio, copolar total power	> 25 dB > 25 dB	> 25 dB > 25 dB	> 25 dB > 25 dB	
Cross polar ratio Maindirection Sector	0° ±60° Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±3.5°			
Vertical Pattern:				
Half-power beam width	14.7°	14°	13°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 18 ... 18 dB	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 18 ... 18 dB	0° ... 4° ... 8° ... 10° T 18 ... 18 ... 18 ... 18 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 175 / 65 / 200 N			
Height/width/depth	662 / 155 / 69 mm			
Category of mounting hardware	L (Light)			
Weight	4.2 kg (tension bands incl.)			
Scope of supply	Panel and 1 unit of tension bands for 45 – 125 mm diameter			



Multi-band Panel Dual Polarization Half-power Beam Width

1710...2200

X

90°

KATHREIN
Antennen · Electronic

XPoL Panel 1710–2200 90° 17dBi 0°–8°T

Type No.	741989v01			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 16.5 dBi	2 x 16.8 dBi	2 x 16.7	
Horizontal Pattern:				
Half-power beam width	88°	88°	88°	
Front-to-back ratio (180°±30°)	Copolar: > 25 dB Total power: > 25 dB	Copolar: > 25 dB Total power: > 25 dB	Copolar: > 24 dB Total power: > 24 dB	
Cross polar ratio Maindirection Sector	0° ±60° Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.0°			
Vertical Pattern:				
Half-power beam width	7°	6.7°	6.5°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam	0° ... 2° ... 5° ... 8° T 18 ... 18 ... 16 ... 14 dB	0° ... 2° ... 5° ... 8° T 20 ... 20 ... 18 ... 17 dB	0° ... 2° ... 5° ... 8° T 18 ... 18 ... 18 ... 17 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 350 / 125 / 400 N			
Height/width/depth	1302 / 155 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	7.5 kg / 9.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

XPoL Panel 1710–2170 90° 18dBi 0°–6°T

Type No.	741990v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 17.7 dBi	2 x 18 dBi	2 x 18.2 dBi	
Horizontal Pattern:				
Half-power beam width	88°	88°	88°	
Front-to-back ratio, copolar total power	> 25 dB > 25 dB	> 25 dB > 25 dB	> 25 dB > 25 dB	
Cross polar ratio Maindirection Sector 0° ±60°	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	4.9°	4.7°	4.5°	
Electrical tilt	0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam	0° ... 2° ... 4° ... 6° T 17 ... 17 ... 17 ... 17 dB	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 18 ... 18 dB	0° ... 2° ... 4° ... 6° T 18 ... 18 ... 18 ... 18 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	1 x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 510 / 185 / 610 N			
Height/width/depth	1942 / 155 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	11 kg / 13 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

For more information about additional mounting accessories please refer to page 205



Dual-Beam Panel

Dual Polarization

Half-power Beam Width

1710–2200	1710–2200
X	X
40°	40°


KATHREIN
Antennen · Electronic

XXPol Panel 1710–2200/1710–2200 40°(–30°)/40°(+30°) 17/17dBi 2°–14°/2°–14°T

Type No.	80010605			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Azimuth direction	Beam A (–30°), Beam B (+30°)			
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain	2° ... 7° ... 14° T 16.5 ... 16.5 ... 16.2 dBi	2° ... 7° ... 14° T 17.0 ... 16.8 ... 16.5 dBi	2° ... 7° ... 14° T 17.5 ... 17.4 ... 16.8 dBi	
Horizontal Pattern:				
Half-power beam width (offset beams ±30°)	43°	40°	37°	
Front-to-back ratio	Copolar: > 30 dB Total power: > 25 dB			
Cross polar ratio Maindirection –30°; +30° Sector –60°; 0°; 0°; +60°	Typically: 15 dB > 8 dB	Typically: 15 dB > 8 dB	Typically: 15 dB > 8 dB	
Sidelobe suppression for sidelobes beside main beam	> 18 dB			
Vertical Pattern:				
Half-power beam width	14.5°	14°	13°	
Electrical tilt	2°–14°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	> 16 dB			
VSWR	< 1.5			
Isolation, between ports	> 28 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	200 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 400 / 115 / 450 N			
Height/width/depth	698 / 380 / 150 mm			
Category of mounting hardware	M (Medium)			
Weight	12 kg / 14 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter			




1710 – 1880 MHz

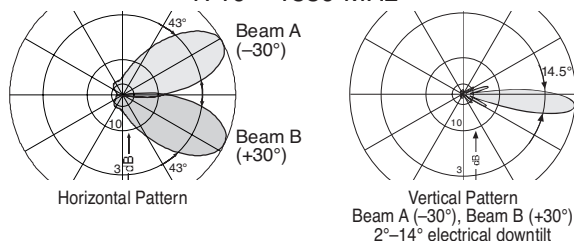


1710–2200 –45° Beam B (+30°)	1710–2200 +45° Beam B (+30°)	1710–2200 +45° Beam A (–30°)	1710–2200 –45° Beam A (–30°)
7-16	7-16	7-16	7-16

1850 – 1990 MHz

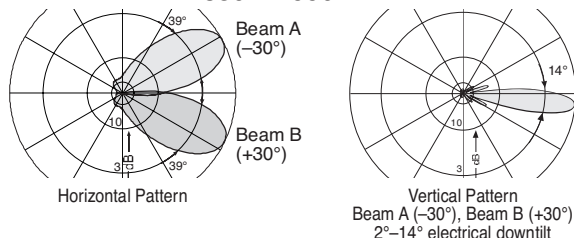

1920 – 2200 MHz

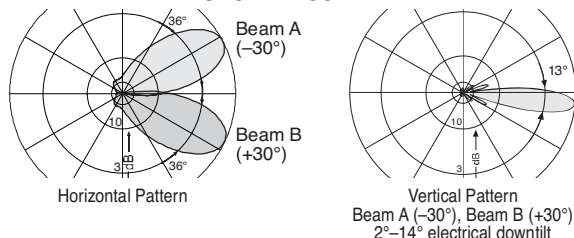

Dual-Beam Panel

Dual Polarization

Half-power Beam Width

1710–2200

1710–2200

X

X

45°

45°

KATHREIN

Antennen · Electronic


XXPol Panel 1710–2200/1710–2200 45°(–30°)/45°(+30°) 19.5/19.5dBi 0°–10°/0°–10°T

Type No.	80010606v01			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Azimuth direction	Beam A (– 30°), Beam B (+30°)			
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain	4 x 19 dBi	4 x 19.3 dBi	4 x 19.5 dBi	
Horizontal Pattern:				
Half-power beam width (offset beams ±30°)	47°	41°	43°	
Front-to-back ratio	Copolar: > 30 dB Total power: > 25 dB			
Cross polar ratio				
Main direction –30°; +30° Sector –60°; 0°; 0°; +60°	Typically: 18 dB > 13 dB	Typically: 17 dB > 13 dB	Typically: 16 dB > 13 dB	
Sidelobe suppression for sidelobes beside main beam	> 18 dB			
Vertical Pattern:				
Half-power beam width	7.2°	7.1°	6.8°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	> 18 dB			
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	200 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 710 / 200 / 820 N			
Height/width/depth	1314 / 380 / 150 mm			
Category of mounting hardware	M (Medium)			
Weight	19 kg / 21 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			




1800/1900/200/2600
XXPol

1710 – 1880 MHz

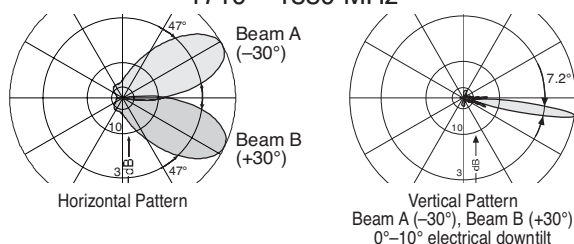


1710–2200 –45° Beam B (+30°)	1710–2200 +45° Beam B (+30°)	1710–2200 +45° Beam A (–30°)	1710–2200 –45° Beam A (–30°)
7-16	7-16	7-16	7-16

1850 – 1990 MHz

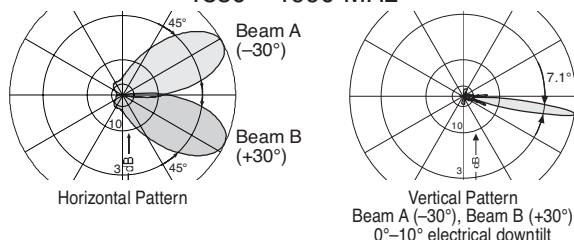

1920 – 2200 MHz

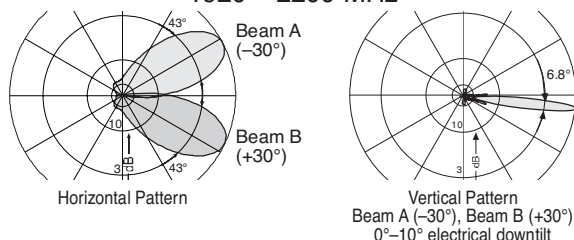

Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200

X

65°

KATHREIN


Antennen · Electronic

XPol Panel IRT 1710–2200 65° 18dBi 0°–10°T

Type No.	80010618v01			clamps included
A) Antenna specifications				
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 17.7 dBi	2 x 17.9 dBi	2 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	67°	66°	65°	
Front-to-back ratio	Copolar: > 30dB Total power: > 25 dB	Copolar: > 30dB Total power: > 25 dB	Copolar: > 30dB Total power: > 25 dB	
Cross polar ratio				
Maindirection	0°			
Sector	±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB
Vertical Pattern:				
Half-power beam width	7.1°	6.8°	6.6°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	> 15 dB	> 17 dB	> 18 dB	
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8°... 10° T 16 ... 16 ... 16 ...16 dB	0° ... 4° ... 8°... 10° T 17 ... 17 ... 17 ...17 dB	0° ... 4° ... 8°... 10° T 17 ... 17 ... 17 ...17 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	120 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female iRCU in: 1 x 8pin male iRCU out: 1 x 8pin female			
Connector position	Bottom			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 330 / 115 / 390 N			
Height/width/depth	1302 / 155 / 69 mm			
Category of mounting hardware	M (Medium)			
Weight	7.5 kg / 9.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps 42 – 115 mm diameter			



B) iRCU specifications	80010618v01
Logical interface ex factory ¹⁾	3GPP/AISG 2.0
Protocols	Compliant to AISG 1.1 and 3GPP/AISG 2.0
Hardware interface ²⁾	2 x 8pin connector acc. IEC 60130-9; according to AISG: – iRCU in (male): Control / Daisy chain in – iRCU out (female): Daisy chain out
Power supply	10 ... 30 V
Power consumption	< 1 W (stand by) < 8.5 W (motor activated)
Adjustment time (full range)	40 sec.
Adjustment cycles	> 50,000

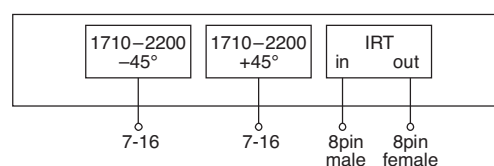

¹⁾ The protocol of the logical interface can be switched from AISG 1.1 to 3GPP/AISG 2.0 and vice versa with a vendor specific command. Start-up operation of the 80010314v01 is only possible with a primary station supporting AISG 1.1 and start-up operation of the 80010618v01 is only possible with a primary station supporting 3GPP/AISG 2.0!
Please note: The used Primary-SW has to be able to handle also integrated remote tilt units, like Kathrein CCU with firmware 1.29 or higher and the Kathrein PCA with SW 2.0 or higher. If the Primary of the system doesn't support the standard of the 'logical interface ex factory', the IRT must be switched to the appropriate standard of the Primary before installation. Please contact Kathrein for further information.

²⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

Tri-Sector Pipe Antenna

Frequency Range

Dual Polarization

Half-power Beam Width

Adjust. Electr. Downtilt

set by hand or by optional RCUs (Remote Control Units)

0°

120°

240°

KATHREIN

Antennen · Electronic

1710–2170

1710–2170

1710–2170

X

X

X

65°

65°

65°

0°–12°

0°–12°

0°–12°


XPol Tri-Sector Pipe 1710–2170 65° 15.5dBi 0°–12°T

Type No.	80010375			Electrical datas per sector
Frequency range	1710–2170			
	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain per Input (dBi)	0° ... 4° ... 8° ... 12° T 15.4 ... 15.2 ... 15.0 ... 14.8	0° ... 4° ... 8° ... 12° T 15.5 ... 15.4 ... 15.3 ... 14.9	0° ... 4° ... 8° ... 12° T 15.7 ... 15.6 ... 15.4 ... 14.9	
Half-power beam width Copolar +45°/–45°	Horizontal: 67° Vertical: 12.7°	Horizontal: 65° Vertical: 12°	Horizontal: 62° Vertical: 11.2°	
Electrical tilt continuously adjustable	0°–12°	0°–12°	0°–12°	
Sidelobe suppression for first sidelobe above horizon	0° ... 4° ... 8° ... 12° T 16 ... 16 ... 15 ... 15 dB	0° ... 4° ... 8° ... 12° T 18 ... 17 ... 17 ... 16 dB	0° ... 4° ... 8° ... 12° T 18 ... 18 ... 16 ... 16 dB	
Front-to-back ratio	Copolar: > 25 dB	Copolar: > 25 dB	Copolar: > 25 dB	
Cross polar ratio Maindirection Sector 0° ±60°	Typically: 20 dB Typically: > 10 dB	Typically: 20 dB Typically: > 10 dB	Typically: 20 dB Typically: > 10 dB	
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB	
Isolation: Intersystem	> 40 dB	> 40 dB	> 40 dB	
Impedance	50 Ω	50 Ω	50 Ω	
VSWR	< 1.5	< 1.5	< 1.5	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	250 W (at 50 °C ambient temperature)			



compact
service area

1800/1900/200/2600
XPol

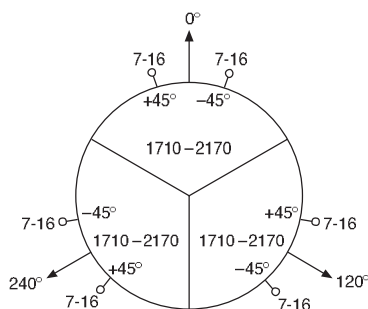

Mechanical specifications

Input	3 x 2 x 7-16 female
Connector position	Bottom – inside service area
Adjustment mechanism	3 x 1, Position bottom continuously adjustable inside service area
Weight	32 kg
Wind load	205 N (at 150 km/h)
Max. wind velocity	200 km/h
Natural frequency	45 – 47 Hz
Damping ratio	0.032
Mechanical interface	Flange connection 12 x 12M at a graduated diameter of 208 mm 0°–360° continuously adjustable (for further details see application note)
Packing size	1395 x 315 x 330 mm
Height / diameter	1241 / 230 and 280 mm

Tri-Sector Pipe Antenna

Frequency Range

Dual Polarization

Half-power Beam Width

Adjust. Electr. Downtilt

set by hand or by optional RCUs (Remote Control Units)

0°

120°

240°

KATHREIN

Antennen · Electronic

1710–2170

1710–2170

1710–2170

X

X

X

65°

65°

65°

0°–10°

0°–10°


0°–10°

XPol Tri-Sector Pipe 1710–2170 65° 18dBi 0°–10°T

Type No.	80010360			Electrical datas per sector
Frequency range	1710–2170			
	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	17.2 ... 17.5 ... 17.2	17.6 ... 17.8 ... 17.6	17.8 ... 17.9 ... 17.4	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Half-power beam width	Horizontal: 66°	Horizontal: 63°	Horizontal: 60°	
Copolar +45°/–45°	Vertical: 7°	Vertical: 6.7°	Vertical: 6.4°	
Electrical tilt continuously adjustable	0°–10°	0°–10°	0°–10°	
Sidelobe suppression for first sidelobe above horizon	0° ... 5° ... 10° T 17 ... 15 ... 15 dB	0° ... 5° ... 10° T 17 ... 17 ... 15 dB	0° ... 5° ... 10° T 17 ... 17 ... 15 dB	
Front-to-back ratio (180° ± 30°)	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	
Cross polar ratio				
Maindirection	0°			
Sector	±60°			
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB	
Isolation: Intersystem	> 45 dB	> 42 dB	> 42 dB	
Impedance	50 Ω	50 Ω	50 Ω	
VSWR	< 1.5	< 1.5	< 1.5	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			



compact service area

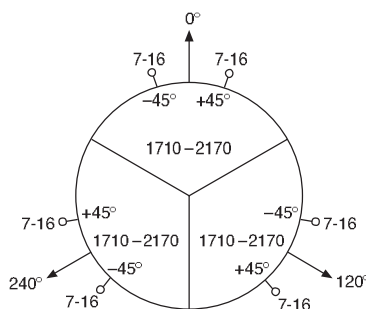

Mechanical specifications

Input	3 x 2 x 7-16 female
Connector position	Bottom – inside service area
Adjustment mechanism	3 x 1, Position bottom continuously adjustable inside service area
Weight	56 kg
Wind load	320 N (at 150 km/h)
Max. wind velocity	200 km/h
Natural frequency	19 – 21 Hz
Damping ratio	0.032
Mechanical interface	Flange connection 12 x 12M at a graduated diameter of 208 mm 0°–360° continuously adjustable (for further details see application note)
Packing size	2030 x 400 x 400 mm
Height / diameter	1823 / 230 and 280 mm

Accessories delivered with the Tri-Sector-Pipe Antenna:

1. Clamping ring for mounting the antenna on the customer-supplied base
2. Lightning conductor rod
3. Ring bolt as attachment possibility for lifting aid
4. Wrench (SW41 + SW27) for attaching the RCU

Optional Accessories:

The following components may be ordered separately


- | | |
|-------------|--|
| 1. 86010147 | Remote Control Unit (RCU) |
| 86010148 | |
| 2. 85010010 | Flexible Sealing Frame (Roxtec frame to seal connection between the mast and the antenna, see below) |
| 3. 738440 | Azimuth Adjustment Tool, see page 220 |
| 4. 86010103 | 3-way power splitter for optional omni pattern |

Flexible Sealing Frame

Type No.	85010010
Outer diameter	180 mm
Cable diameter (6x)	15 – 42 mm
Cable diameter (3x)	3.5 – 10.5 mm
Frame-Material	Stainless steel
Sealing-Material	Halogen free cross linkable compound on ethylene-propylene rubber (EPDM)
Material of screws	Stainless steel
Accessories	Mounting lubricant
Required assembly tools	Socket wrench size 6 mm
Weight (without packaging)	1.8 kg
Packing size (L x W x H)	approx. 208 x 208 x 68 mm



For further information
please refer to separate application note under:
www.kathrein.de/en/mcs/index.htm

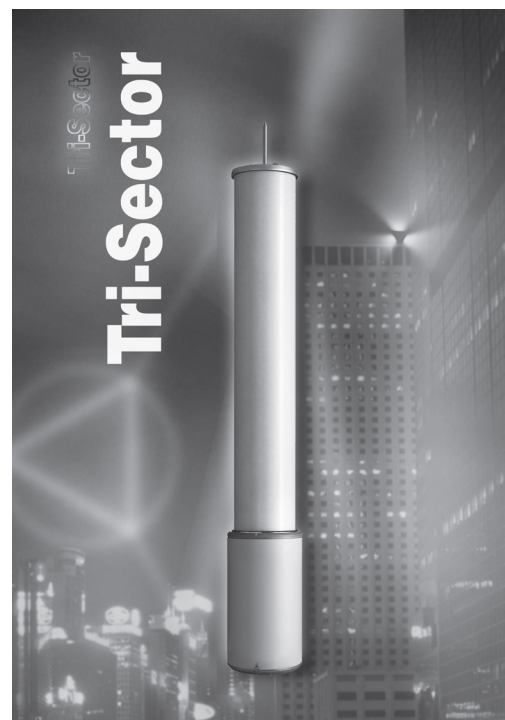

Summary – Directional Antennas

2-Multi-band

1800/1900/2000/2600

Dual Polarization +45°/–45°

Type	Type No.	Height [mm]	Connector position	Page
XXPol Panel 1710–2170 65° 15dBi 0°–10°T	742233v01	679	bottom	92
1710–2170 65° 15dBi 0°–10°T				
XXPol Panel 1710–2690 65° 16.5dBi 0°–12°T	80010682	855	bottom	93
1710–2690 65° 16.5dBi 0°–12°T				
XXPol Panel 1710–1880 65° 17.5dBi 2°–10°T	80010744	1410	bottom	94
1920–2170 60° 18dBi 2°–10°T				
XXPol Panel 1710–2170 65° 18dBi 0°–8°T	742237	1147	bottom	94
1710–2170 65° 18dBi 0°–8°T				
XXPol Panel 1710–2170 65° 18dBi 0°–10°T	80010644	1410	bottom	95
2490–2690 60° 18dBi 0°–10°T				
XXPol Panel 1710–2200 65° 18dBi 0°–10°T	742236v01	1319	bottom	95
1710–2200 65° 18dBi 0°–10°T				
XXPol Panel 1710–2690 65° 18dBi 0°–12°T ESLS	80010622	1415	bottom	96
1710–2690 65° 18dBi 0°–12°T				
XXPol Panel 1710–2200 65° 18dBi 0°–15°T ESLS	80010510v01	1389	bottom	97
1710–2200 65° 18dBi 0°–15°T				
XXPol Panel 1710–2170 65° 19.5dBi 0°–6°T	742235v01	1959	bottom	98
1710–2170 65° 19.5dBi 0°–6°T				
XXPol Panel 1710–2690 65° 19dBi 0°–10°T	80010652	1688	bottom	99
1710–2690 65° 19dBi 0°–10°T				
XXPol Panel 1710–2200 65° 19dBi 0°–10°T ESLS	80010511v01	1999	bottom	100
1710–2200 65° 19dBi 0°–10°T				
XXPol Panel 1710–2180 90° 16.5dBi 0°–10°T	742352v01	1319	bottom	101
1710–2180 90° 16.5dBi 0°–10°T				

New or changed product

When deploying
2-Multi-band Antennas,
please also consider using
special Dual-band Combiners
(see pages 240 and 241)

Abbreviations:

ESLS: Enhanced Side Lobe Suppression (above or below horizon)


2-Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170	1710–2170
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2170/1710–2170 65°/65° 15/15dBi 0°–10°/0°–10°T

Type No.	742233v01			clamps included
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain	4 x 15 dBi	4 x 15.2 dBi	4 x 15.3 dBi	
Horizontal Pattern:				
Half-power beam width	67°	65°	62°	
Front-to-back ratio	Copolar: > 25 dB Total power: > 25 dB	Copolar: > 25 dB Total power: > 25 dB	Copolar: > 25 dB Total power: > 25 dB	
Cross polar ratio				
Main direction	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB	
Sector	Typically: 10 dB	Typically: 10 dB	Typically: 10 dB	
Vertical Pattern:				
Half-power beam width	14°	13.7°	13°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° ... 10° T 16 ... 16 ... 15 ... 15 dB	0° ... 4° ... 8° ... 10° T 16 ... 16 ... 16 ... 16 dB	0° ... 4° ... 8° ... 10° T 16 ... 16 ... 16 ... 16 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	250 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 350 / 85 / 370 N			
Height/width/depth	679 / 323 / 71 mm			
Category of mounting hardware	M (Medium)			
Weight	11 kg / 13 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

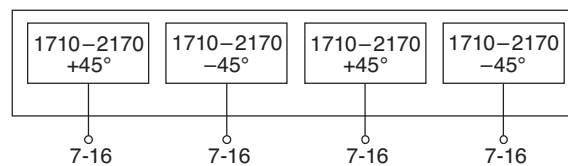



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690	1710–2690
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2690/1710–2690 65°/65° 16.5/16.5dBi 0°–12°/0°–12°T

Type No.	80010682				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	4 x 15.8 dBi	4 x 16.2 dBi	4 x 16.6 dBi	4 x 16.7 dBi	
Horizontal Pattern:					
Half-power beam width	65°	64°	60°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 28 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector	0°	0°	0°	0°	
	±60°	> 8 dB	> 8 dB	> 10 dB	> 10 dB
Vertical Pattern:					
Half-power beam width	11°	10°	9°	8.7°	
Electrical tilt	0°–12°, continuously adjustable				
Sidelobe supression for first sidelobe above main beam	0° ... 6° ... 12° T ≥ 12 ... 13 ... 15 dB	0° ... 6° ... 12° T ≥ 13 ... 14 ... 16 dB	0° ... 6° ... 12° T ≥ 13 ... 15 ... 16 dB	0° ... 6° ... 12° T ≥ 15 ... 15 ... 17 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	250 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	2x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 440 / 100 / 460 N				
Height/width/depth	855 / 323 / 71 mm				
Category of mounting hardware	M (Medium)				
Weight	11 kg / 13 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

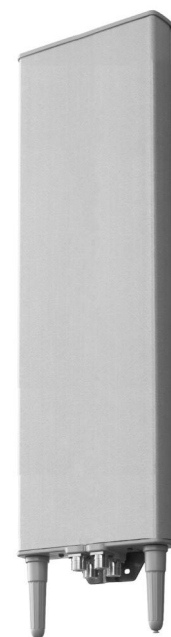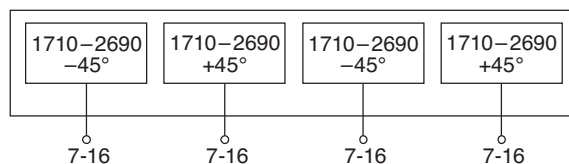

Multi-band Panel Dual Polarization Half-power Beam Width

1710...(1880)...2170

1710...(1920)...2170

X

X

65°

60°

KATHREIN

Antennen · Electronic

XXPol Panel 1710–1880/1920–2170 65°/60° 17.5/18dBi 2°–10°/2°–10°T


Type No.	80010744		clamps included
	1710–1880	1920–2170	
Frequency range	1710 – 1880 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	
Gain	2 x 17.5 dBi	2 x 18 dBi	
Horizontal Pattern:			
Half-power beam width	65°	59°	
Front-to-back ratio (180°±30°)	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 28 dB Total power: > 25 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	
Maindirection	0°	0°	
Sector	±60°	±60°	
Tracking, Avg.	0.5 dB	0.5 dB	
Squint	±1.5°	±1.5°	
Vertical Pattern:			
Half-power beam width	6.6°	5.9°	
Electrical tilt, continuously adjustable	2°–10°	2°–10°	
Sidelobe suppression for first sidelobe above main beam	2° ... 6° ... 10° T 18 ... 16 ... 16 dB	2° ... 6° ... 10° T 18 ... 16 ... 15 dB	
VSWR	< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB	> 30 dB	
Isolation: Intersystem	> 30 dB		
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc	
Max. power per input	200 W*	200 W*	
Input	4 x 7-16 female		
Connector position	Bottom		
Adjustment mechanism	2x, Position bottom continuously adjustable		
Wind load (at 150 km/h)	Frontal / lateral / rearside: 370 / 145 / 370 N		
Height/width/depth	1410 / 155 / 89 mm		
Category of mounting hardware	M (Medium)		
Weight	10 kg / 12 kg (clamps incl.)		
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter		

* (at 50 °C ambient temperature)



XXPol Panel 1710–2170/1710–2170 65°/65° 18/18dBi 0°–8°/0°–8°T

Type No.	742237			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°, +45°, –45°	+45°, –45°, +45°, –45°	+45°, –45°, +45°, –45°	
Gain	4 x 17.5 dBi	4 x 17.7 dBi	4 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	65°	63°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Avg.: 25 dB	Avg.: 25 dB	Avg.: 25 dB	
Maindirection	0°	0°	0°	
Sector	±60°	±60°	±60°	
Vertical Pattern:				
Half-power beam width	8.3°	8°	7.5°	
Electrical tilt	0°–8°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam, Avg.	0° ... 4° ... 8° T 20 ... 20 ... 18 dB	0° ... 4° ... 8° T 20 ... 20 ... 18 dB	0° ... 4° ... 8° T 20 ... 20 ... 18 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	250 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 590 / 135 / 610 N			
Height/width/depth	1147 / 323 / 71 mm			
Category of mounting hardware	M (Medium)			
Weight	12.5 kg / 14.5 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

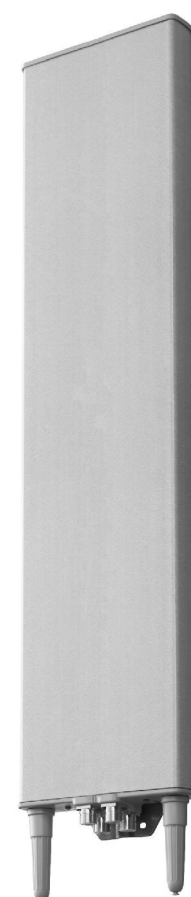

Multi-band Panel Dual Polarization Half-power Beam Width

1710...2200 1710...(2490)...2690

X X

65° 65°

KATHREIN

Antennen · Electronic

XXPol Panel 1710–2170/2490–2690 65°/60° 18/18dBi 0°–10°/0°–10°T

Type No.	80010644			clamps included
	1710–2180		2490–2690	
Frequency range	1710 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	
Gain at 0° tilt	2 x 17.5 dBi	2 x 17.7 dBi	2 x 18.0 dBi	
Horizontal Pattern:				
Half-power beam width	68°	65°	61°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio 0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Sector ±60°	> 8 dB	> 8 dB	> 10 dB	
Vertical Pattern:				
Half-power beam width	6.7°	6.3°	5.4°	
Electrical tilt, continuously adjustable	0°–10°		0°–10°	
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB	0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB	0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB	
VSWR	< 1.5		< 1.5	
Isolation: Intrasystem	> 30 dB		> 30 dB	
Isolation: Intersystem	> 29 dB		> 29 dB	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	200 W*		200 W*	
Total power	400 W*		400 W*	
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 370 / 145 / 400 N			
Height/width/depth	1410 / 155 / 89 mm			
Category of mounting hardware	M (Medium)			
Weight	10 kg / 12 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

*(at 50 °C ambient temperature)

XXPol Panel 1710–2200/1710–2200 65°/65° 18/18dBi 0°–10°/0°–10°T

Type No.	742236v01			clamps included
	1710–2200			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2200 MHz	
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain	4 x 17.6 dBi	4 x 17.8 dBi	4 x 18 dBi	
Horizontal Pattern:				
Half-power beam width	64°	64°	62°	
Front-to-back ratio	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	
Cross polar ratio 0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Main direction ±60°	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:				
Half-power beam width	7°	6.8°	6.5°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T 20 ... 18 ... 16 dB	0° ... 5° ... 10° T 20 ... 18 ... 16 dB	0° ... 5° ... 10° T 16 ... 18 ... 16 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 660 / 155 / 690 N			
Height/width/depth	1319 / 323 / 71 mm			
Category of mounting hardware	M (Medium)			
Weight	15 kg / 17 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690	1710–2690
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2690/1710–2690 65°/65° 18/18dBi 0°–12°/0°–12°T ESLS

Type No.	80010622				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	17.4 ... 17.4 ... 17.3	17.8 ... 17.6 ... 17.5	18.0 ... 17.9 ... 17.5	18.0 ... 17.7 ... 17.3	
Tilt	0° ... 6° ... 12°	0° ... 6° ... 12°	0° ... 6° ... 12°	0° ... 6° ... 12°	
Horizontal Pattern:					
Half-power beam width	65°	65°	61°	61°	
Front-to-back ratio (180°±30°)	> 25 dB, avg. 28 dB	> 26 dB, avg. 28 dB	> 25 dB, avg. 27 dB	> 25 dB, avg. 27 dB	
Cross polar ratio 0°	Typically: 30 dB	Typically: 30 dB	Typically: 25 dB	Typically: 25 dB	
Sector ±60°	> 10 dB	> 10 dB	> 8 dB	> 10 dB	
Vertical Pattern:					
Half-power beam width	7.1°	6.5°	5.9°	5.7°	
Electrical tilt	0°–12°, continuously adjustable				
Sidelobe suppression for first sidelobe above main beam	0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB	0° ... 6° ... 12° T ≥ 18 ... 18 ... 18 dB	0° ... 6° ... 12° T ≥ 18 ... 17 ... 17 dB	0° ... 6° ... 12° T ≥ 18 ... 18 ... 17 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	2x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 720 / 165 / 740 N				
Height/width/depth	1415 / 323 / 71 mm				
Category of mounting hardware	M (Medium)				
Weight	18 kg / 20 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

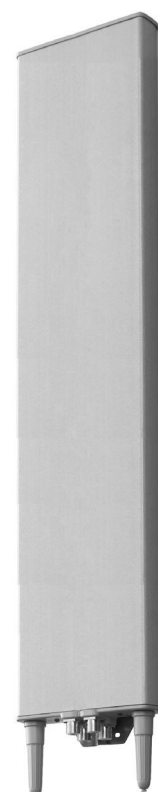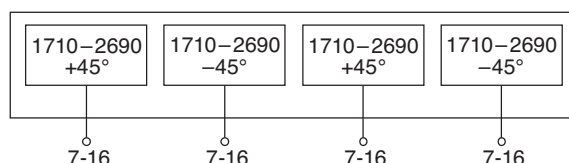



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200	1710–2200
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2200/1710–2200 65°/65° 18/18dBi 0°–15°/0°–15°T ESLS

Type No.	80010510v01				clamps included
	1710–2200				
Frequency range	1710 – 1880 MHz	1880 – 1990 MHz	1920 – 2170 MHz	2000 – 2200 MHz	
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain at 0° tilt	4 x 17.5 dBi	4 x 17.6 dBi	4 x 17.7 dBi	4 x 17.8 dBi	
Horizontal Pattern:					
Half-power beam width	65°	63°	62°	62°	
Front-to-back ratio (180°±30°)	≥ 30 dB	≥ 30 dB	≥ 30 dB	≥ 28 dB	
Cross polar ratio 0°	24 dB	24 dB	24 dB	26 dB	
Sector ±60°	≥ 9 dB	≥ 9 dB	> 10 dB	≥ 10 dB	
Vertical Pattern:					
Half-power beam width	7.9°	7.5°	7.2°	7.0°	
Electrical tilt	0°–15°, continuously adjustable				
Sidelobe suppression	0° ... 5° ... 10° ... 15° T	0° ... 5° ... 10° ... 15° T	0° ... 5° ... 10° ... 15° T	0° ... 5° ... 10° ... 15° T	
– for first sidelobe above main beam	≥ 17 ... 20 ... 18 ... 17 dB	≥ 16 ... 20 ... 18 ... 18 dB	≥ 15 ... 19 ... 18 ... 17 dB	≥ 14 ... 18 ... 18 ... 16 dB	
– within 0°–20° sector above horizon	≥ 16 ... 18 ... 18 ... 16 dB	≥ 16 ... 17 ... 17 ... 16 dB	≥ 15 ... 17 ... 17 ... 16 dB	≥ 14 ... 16 ... 16 ... 15 dB	
Null-fill at 0° tilt	23 dB	22 dB	21 dB	20 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	2x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 700 / 160 / 720 N				
Height/width/depth	1389 / 323 / 71 mm				
Category of mounting hardware	M (Medium)				
Weight	17 kg / 19 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

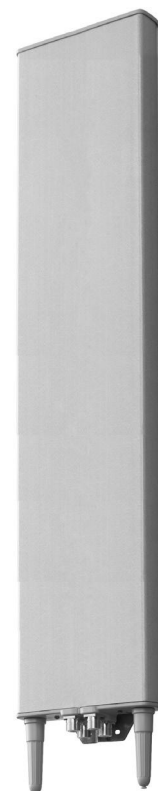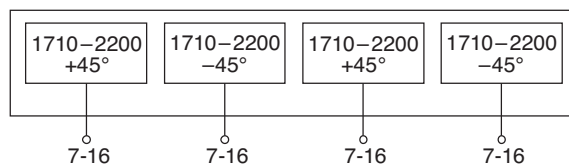

2-Multi-band Panel Dual Polarization Half-power Beam Width

1710–2170	1710–2170
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2170/1710–2170 65°/65° 19.5/19.5dBi 0°–6°/0°–6°T

Type No.	742235v01			clamps included
	1710–2170			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain	4 x 19 dBi	4 x 19.2 dBi	4 x 19.5 dBi	
Horizontal Pattern:				
Half-power beam width	65°	64°	63°	
Front-to-back ratio	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 25 dB	Copolar: > 30 dB Total power: > 24 dB	
Cross polar ratio Maindirection Sector	0° Typically: 25 dB ±60° > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	
Tracking, Avg.	0.5 dB			
Squint	±2.5°			
Vertical Pattern:				
Half-power beam width	4.6°	4.4°	4.2°	
Electrical tilt	0°–6°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 2° ... 4° ... 6° T 17 ... 17 ... 14 ... 14 dB	0° ... 2° ... 4° ... 6° T 17 ... 17 ... 15 ... 15 dB	0° ... 2° ... 4° ... 6° T 17 ... 17 ... 15 ... 15 dB	
VSWR	< 1.5			
Isolation, between ports	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1010 / 220 / 1040 N			
Height/width/depth	1959 / 323 / 71 mm			
Category of mounting hardware	M (Medium)			
Weight	18 kg / 20 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			




Multi-band Panel Dual Polarization Half-power Beam Width

1710–2690	1710–2690
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2690/1710–2690 65°/65° 19/19dBi 0°–10°/0°–10°T

Type No.	80010652				clamps included
	1710–2690				
Frequency range	1710 – 1990 MHz	1920 – 2200 MHz	2200 – 2490 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	18.2 ... 18.4 ... 18.0	18.7 ... 18.9 ... 18.4	18.8 ... 19.0 ... 18.3	18.7 ... 19.0 ... 18.3	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:					
Half-power beam width	65°	65°	62°	63°	
Front-to-back ratio, copolar	> 30 dB	> 26 dB	> 28 dB	> 26 dB	
Cross polar ratio	Typically: 22 dB	Typically: 22 dB	Typically: 22 dB	Typically: 20 dB	
Sector	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:					
Half-power beam width	5.5°	5.0°	4.3°	4.0°	
Electrical tilt	0°–10°, continuously adjustable				
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB	0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB	0° ... 5° ... 10° T ≥ 18 ... 16 ... 15 dB	0° ... 5° ... 10° T ≥ 18 ... 15 ... 15 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	2x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 830 / 320 / 880 N				
Height/width/depth	Approx. 1668 / 323 / 71 mm				
Category of mounting hardware	M (Medium)				
Weight	18 kg / 20 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter				

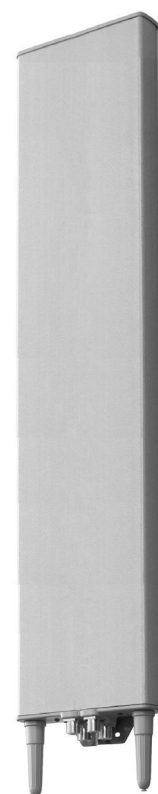

1800/1900/200/2600
XXPol 2-H/ulti



Multi-band Panel Dual Polarization Half-power Beam Width

1710–2200	1710–2200
X	X
65°	65°

KATHREIN
Antennen · Electronic

XXPol Panel 1710–2200/1710–2200 65°/65° 19/19dBi 0°–10°/0°–10°T ESLS

Type No.	80010511v01				clamps included
	1710–2200				
Frequency range	1710 – 1880 MHz	1880 – 1990 MHz	1920 – 2170 MHz	2000 – 2200 MHz	
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain (dBi)	18.5 ... 18.7 ... 18.5	18.7 ... 19.0 ... 18.5	18.7 ... 19.0 ... 18.4	18.7 ... 18.9 ... 18.3	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:					
Half-power beam width	66°	65°	65°	63°	
Front-to-back ratio (180°±30°)	≥ 30 dB	≥ 30 dB	≥ 30 dB	≥ 28 dB	
Cross polar ratio Sector 0° ±60°	Typically: 22 dB ≥ 10 dB	Typically: 22 dB ≥ 10 dB	Typically: 22 dB ≥ 10 dB	Typically: 22 dB ≥ 10 dB	
Vertical Pattern:					
Half-power beam width	5.0°	4.8°	4.6°	4.4°	
Electrical tilt	0°–10°, continuously adjustable				
Sidelobe suppression – for first sidelobe above main beam – within 0°–20° sector above horizon	0° ... 4° ... 8° ... 10° T ≥ 20 ... 20 ... 18 ... 18 dB ≥ 18 ... 18 ... 17 ... 17 dB	0° ... 4° ... 8° ... 10° T ≥ 20 ... 20 ... 18 ... 18 dB ≥ 17 ... 18 ... 17 ... 15 dB	0° ... 4° ... 8° ... 10° T ≥ 19 ... 20 ... 18 ... 18 dB ≥ 17 ... 17 ... 17 ... 15 dB	0° ... 4° ... 8° ... 10° T ≥ 18 ... 20 ... 18 ... 18 dB ≥ 17 ... 17 ... 14 ... 12 dB	
VSWR	< 1.5				
Isolation, between ports	> 30 dB				
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)				
Max. power per input	300 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female				
Connector position	Bottom				
Adjustment mechanism	2x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1020 / 230 / 1080 N				
Height/width/depth	1999 / 323 / 71 mm				
Category of mounting hardware	M (Medium)				
Weight	18 kg / 20 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

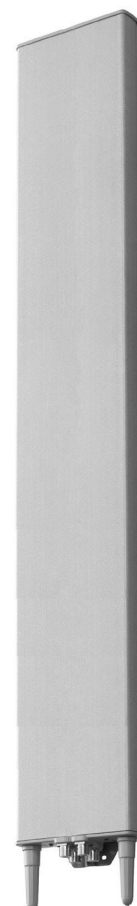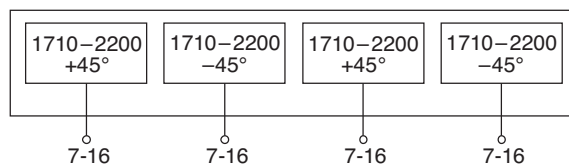

2-Multi-band Panel

Dual Polarization


Half-power Beam Width

1710–2180**1710–2180****X****X****90°****90°****KATHREIN**

Antennen · Electronic

XXPol Panel 1710–2180/1710–2180 90°/90° 16.5/16.5dBi 0°–10°/0°–10°T

Type No.	742352v01			clamps included
	1710–2180			
Frequency range	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	+45°, –45°; +45°, –45°	
Gain (average)	16.1 ... 16.3 ... 16.0 dBi	16.2 ... 16.4 ... 16.1 dBi	16.5 ... 16.7 ... 16.2 dBi	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Horizontal Pattern:				
Half-power beam width	88°	90°	88°	
Front-to-back ratio	Copolar: > 24 dB Total power: > 24 dB	Copolar: > 24 dB Total power: > 24 dB	Copolar: > 24 dB Total power: > 24 dB	
Cross polar ratio				
Maindirection	0°	Typically: 15 dB	Typically: 15 dB	
Sector	±60°	> 8 dB	> 7.5 dB	
Tracking, Avg.	0.5 dB			
Squint	2.5°			
Vertical Pattern:				
Half-power beam width	7.4°	7°	6.5°	
Electrical tilt	0°–10°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 8° ... 10° T 18 ... 17 ... 16 ... 15 dB	0° ... 4° ... 8° ... 10° T 18 ... 17 ... 16 ... 15 dB	0° ... 4° ... 8° ... 10° T 17 ... 17 ... 16 ... 15 dB	
VSWR	< 1.5			
Isolation: Intrasystem	> 30 dB			
Isolation: Intersystem	> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	300 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female			
Connector position	Bottom			
Adjustment mechanism	2x, Position bottom continuously adjustable			
Wind load (at 150 km/h)	Frontal / lateral / rearside: 660 / 155 / 690 N			
Height/width/depth	1319 / 323 / 71 mm			
Category of mounting hardware	M (Medium)			
Weight	17 kg / 19 kg (clamps incl.)			
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter			

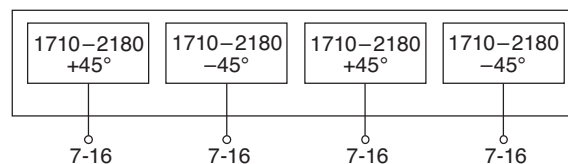1800/1900/200/2600
XXPol 2-Multi

Summary – Directional Antennas

Dual-band

800/900 – 1800/2000/2600

Dual Polarization +45°/–45°

Type	Type No.	Height [mm]	Connector position	Page
XXPol Panel 806–960 C 65° 8.5dBi 0°T	80010454v01	270	bottom or top	104
1710–2180 60° 9.5dBi 0°T				
XXPol Panel 790–960 65° 12dBi 0°T	742226v01	579	bottom or top	105
1710–2170 60° 14dBi 0°T				
XXPol Panel 790–960 C 65° 12dBi 0°T	742222v01	579	bottom or top	106
1710–2170 60° 14dBi 0°T				
XXPol Panel 790–960 65° 14.5dBi 0°–14°T	742264v02	1334	bottom	107
1710–2180 65° 17.5dBi 0°–8°T				
XXPol Panel 790–960 C 65° 14.5dBi 0°–14°T	742223v02	1334	bottom	108
1710–2180 65° 17.5dBi 0°–8°T				
XXPol Panel 790–960 65° 15dBi 0°–16°T	80010664	1399	bottom	109
1710–2690 65° 17.5dBi 2°–10°T				
XXPol Panel 790–960 65° 16dBi 0°–10°T	742265v02	1933	bottom	110
1710–2180 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 16dBi 0°–10°T	80010771	1934	rearside	111
1710–2180 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 16.5dBi 2°–14°T	80010485v01	2038	bottom	112
1710–2180 65° 18.5dBi 4°–10°T				
XXPol Panel 790–960 C 65° 16dBi 0°–10°T	742224v02	1933	bottom	113
1710–2180 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 16dBi 0°–10°T	80010665	1997	bottom	114
1710–2690 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 17dBi 0°–7°T	742266v02	2533	bottom	115
1710–2180 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 17dBi 0°–8°T	80010772	2399	rearside	116
1710–2180 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 17dBi 0°–10°T	80010666	2622	bottom	117
1710–2690 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 65° 17.5dBi 4°–12°T	80010486v01	2516	bottom	118
1710–2180 65° 18.5dBi 4°–14°T				
XXPol Panel 790–960 C 65° 17dBi 0°–7°T	742225v02	2533	bottom	119
1710–2180 65° 18.5dBi 0°–6°T				
XXPol Panel 790–960 90° 13.5dBi 0°–13°T	80010121v01	1384	bottom	120
1710–2180 90° 16.5dBi 0°–10°T				
XXPol Panel 790–960 90° 15.2dBi 0°–10°T	80010122v01	1917	bottom	121
1710–2180 90° 18dBi 0°–6°T				
XXPol Panel 790–960 90° 16.5dBi 0°–7°T	80010123v03	2635	bottom	122
1710–2180 90° 18dBi 0°–6°T				

C = integrated Combiner

New or changed product

When deploying
Dual-band Antennas,
please also consider using
special Dual-band Combiners
(see pages 240 and 241)

Dual-band Panel Dual Polarization Half-power Beam Width

806–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 806–960/1710–2180 C 65°/65° 8.5/9.5dBi

Type No.	80010454v01						clamps included
	806–960			1710–2180			
Frequency range	806 – 866 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain	2 x 8.5 dBi	2 x 8.5 dBi	2 x 8.5 dBi	2 x 9.5 dBi	2 x 9.5 dBi	2 x 9.5 dBi	
Horizontal Pattern:							
Half-power beam width	67°	67°	65°	60°	63°	68°	
Front-to-back ratio [dB]	Copolar: > 25 Total power: > 20	Copolar: > 25 Total power: > 20	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22
Cross polar ratio							
Maindirection	0°						
Sector	±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 20 dB > 10 dB	Typically: 20 dB > 10 dB	Typically: 19 dB > 10 dB	Typically: 20 dB > 10 dB
Vertical Pattern:							
Half-power beam width	68°	68°	69°	64°	62°	60°	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power	250 W (at 50 °C ambient temperature)			100 W (at 50 °C ambient temperature)			
Max. power per combined input	350 W (at 50 °C ambient temperature)						
Input	2 x 7-16 female						
Connector position	Bottom or top						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 95 / 35 / 130 N						
Height/width/depth	270 / 262 / 116 mm						
Category of mounting hardware	M (Medium)						
Weight	4.5 kg / 6.5 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						
Integrated combiner	The insertion loss is included in the given antenna gain values.						

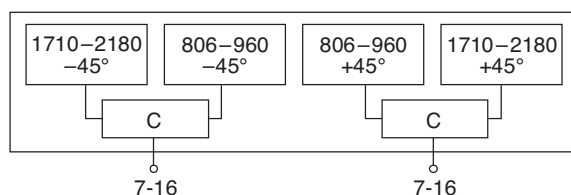

Dual-band Panel Dual Polarization Half-power Beam Width

790–960

1710–2170

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2170 65°/60° 12/14dBi 0°/0°T

Type No.	742226v01						clamps included
	790–960			1710–2170			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 11.1 dBi	2 x 11.4 dBi	2 x 11.8 dBi	2 x 12.8 dBi	2 x 13.3 dBi	2 x 13.6 dBi	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	66°	60°	60°	
Front-to-back ratio [dB] (180°±30°)	Copolar: > 23 Total power: > 20	Copolar: > 23 Total power: > 20	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22
Cross polar ratio Main direction 0° Sector ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 16 dB > 10 dB	Typically: 18 dB > 10 dB	Typically: 20 dB > 10 dB	
Tracking, Avg.	1.0 dB			0.5 dB			
Squint	±3.0°			±1.5°			
Vertical Pattern:							
Half-power beam width	34°	33°	30°	20°	18°	17.5°	
Electrical tilt	0°, fixed			0°, fixed			
VSWR	< 1.5			< 1.5			
Isolation: Intrasystem	> 30 dB			> 30 dB			
Isolation: Intersystem	> 42 dB (790–960 // 1710–2170 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power	250 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female						
Connector position	Bottom or top						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 200 / 90 / 250 N						
Height/width/depth	579 / 262 / 139 mm						
Category of mounting hardware	M (Medium)						
Weight	7.5 kg / 9.5 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

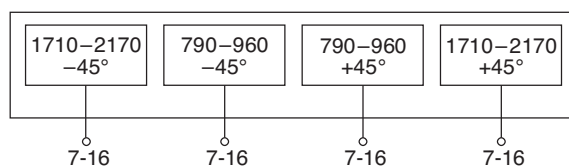

800/900 –
1800/2000/2600
XXPol

Dual-band Panel Dual Polarization Half-power Beam Width

790–960

1710–2170

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2170 C 65°/60° 12/14dBi 0°/0°T

Type No.	742222v01						clamps included
	790–960			1710–2170			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 11.1 dBi	2 x 11.4 dBi	2 x 11.8 dBi	2 x 12.5 dBi	2 x 13.3 dBi	2 x 13.6 dBi	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	66°	60°	60°	
Front-to-back ratio [dB] (180°±30°)	Copolar: > 23 Total power: > 20	Copolar: > 23 Total power: > 20	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22	Copolar: > 25 Total power: > 22
Cross polar ratio Main direction 0° Sector ±60°	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 25 dB > 10 dB	Typically: 18 dB > 10 dB	Typically: 18 dB > 10 dB	Typically: 20 dB > 10 dB	
Vertical Pattern:							
Half-power beam width	34°	33°	30°	20°	18°	17.5°	
Electrical tilt	0°, fixed			0°, fixed			
VSWR	< 1.5			< 1.5			
Isolation: Intrasystem	> 30 dB			> 30 dB			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power	250 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)			
Input	2 x 7-16 female						
Connector position	Bottom or top						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 200 / 90 / 250 N						
Height/width/depth	579 / 262 / 139 mm						
Category of mounting hardware	M (Medium)						
Weight	7.5 kg / 9.5 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						
Integrated combiner	The insertion loss is included in the given antenna gain values.						

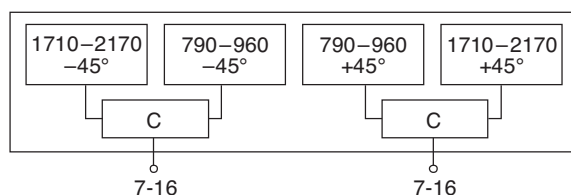

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 14.5/17.5dBi 0°–14°/0°–8°T

Type No.	742264v02						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	14.1 ... 14.1 ... 13.7	14.3 ... 14.2 ... 13.8	14.5 ... 14.4 ... 13.9	17.1 ... 17.3 ... 17.1	17.2 ... 17.4 ... 17.1	17.3 ... 17.5 ... 17.2	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	65°	62°	61°	
Front-to-back ratio, copalar	> 30 dB	> 30 dB	> 30 dB	> 32 dB	> 32 dB	> 32 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Main direction 0°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Sector ±60°							
Tracking, Avg.	1.0 dB			0.5 dB			
Squint	±2.0°			±3.0°			
Vertical Pattern:							
Half-power beam width	16.5°	16°	15.3°	7.4°	7.1°	6.7°	
Electrical tilt	0°–14°, continuously adjustable			0°–8°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0° ... 7° ... 14° T 17 ... 16 ... 15 dB	0° ... 7° ... 14° T 19 ... 18 ... 18 dB	0° ... 7° ... 14° T 17 ... 18 ... 17 dB	0° ... 4° ... 8° T 17 ... 17 ... 16 dB	0° ... 4° ... 8° T 15 ... 15 ... 15 dB	0° ... 4° ... 8° T 16 ... 16 ... 15 dB	
VSWR	< 1.5			< 1.5			
Isolation: Intrasystem	> 30 dB			> 30 dB			
Isolation: Intersystem	> 45 dB, Typ. > 50 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 560 / 260 / 600 N						
Height/width/depth	1334 / 261 / 146 mm						
Category of mounting hardware	M (Medium)						
Weight	15.5 kg / 17.5 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

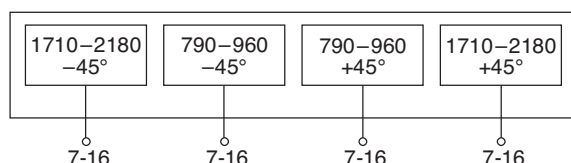

800/900 –
1800/2100/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°

65°


KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 C 65°/65° 14.5/17.5dBi 0°–14°/0°–8°T

Type No.	742223v02					clamps included
	790–960		1710–2180			
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	14.1 ... 14.1 ... 13.7	14.5 ... 14.4 ... 13.9	17.1 ... 17.3 ... 17.1	17.2 ... 17.4 ... 17.1	17.3 ... 17.5 ... 17.2	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:						
Half-power beam width	68°	65°	65°	62°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 32 dB	> 32 dB	> 32 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Main direction	0°					
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB		0.5 dB			
Squint	±2.0°		±3.0°			
Vertical Pattern:						
Half-power beam width	16.5°	15.3°	7.4°	7.1°	6.7°	
Electrical tilt	0°–14°, continuously adjustable		0°–8°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0° ... 7° ... 14° T 17 ... 16 ... 15 dB	0° ... 7° ... 14° T 17 ... 18 ... 17 dB	0° ... 4° ... 8° T 17 ... 17 ... 16 dB	0° ... 4° ... 8° T 15 ... 15 ... 15 dB	0° ... 4° ... 8° T 16 ... 16 ... 15 dB	
VSWR	< 1.5					
Isolation: Intrasytem	> 30 dB					
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)					
Max. power per input	250 W*		200 W*			
Total power per combined input	450 W*					
Input	4 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	2x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 560 / 260 / 600 N					
Height/width/depth	1334 / 261 / 146 mm					
Category of mounting hardware	M (Medium)					
Weight	15.5 kg / 17.5 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					
Integrated combiner	The insertion loss is included in the given antenna gain values.					

* (at 50 °C ambient temperature)

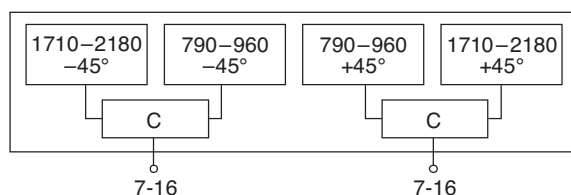

Dual-band Panel Dual Polarization Half-power Beam Width

790–960

1710–2690

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2690 65°/65° 15/17.5dBi 0°–16°/2°–10°T

Type No.	80010664							clamps included
	790–960			1710–2690				
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	14.5 ... 14.4 ... 14.2	14.6 ... 14.5 ... 14.3	14.8 ... 14.6 ... 14.4	17.2 ... 17.3 ... 16.8	17.4 ... 17.4 ... 16.9	17.6 ... 17.7 ... 17.0	17.2 ... 17.3 ... 16.7	
Tilt	0° ... 8° ... 16°	0° ... 8° ... 16°	0° ... 8° ... 16°	2° ... 5° ... 10°	2° ... 5° ... 10°	2° ... 5° ... 10°	2° ... 5° ... 10°	
Horizontal Pattern:								
Half-power beam width	69°	68°	67°	63°	64°	66°	65°	
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 28 dB	> 28 dB	> 25 dB	
Cross polar ratio								
Main direction	0°	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 18 dB	20 dB	20 dB	
Sector	±60°	> 10 dB	> 9 dB	> 8 dB	> 9 dB	> 10 dB	> 10 dB	
Vertical Pattern:								
Half-power beam width	16.5°	16.0°	15.5°	6.2°	5.8°	5.2°	4.8°	
Electrical tilt	0°–16°, continuously adjustable			2°–10°, continuously adjustable				
Sidelobe suppression for first sidelobe above main beam	0° ... 8° ... 16° T 16 ... 15 ... 15 dB	0° ... 8° ... 16° T 16 ... 15 ... 15 dB	0° ... 8° ... 16° T 15 ... 15 ... 14 dB	2° ... 5° ... 10° T 14 ... 15 ... 16 dB	2° ... 5° ... 10° T 14 ... 15 ... 17 dB	2° ... 5° ... 10° T 15 ... 16 ... 17 dB	2° ... 5° ... 10° T 15 ... 17 ... 18 dB	
VSWR	< 1.5							
Isolation: Intrasystem	> 30 dB			> 28 dB			< 30 dB	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)							
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)				
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female							
Connector position	Bottom							
Adjustment mechanism	2x, Position bottom continuously adjustable							
Wind load (at 150 km/h)	Frontal / lateral / rearside: 650 / 240 / 700 N							
Height/width/depth	1399 / 300 / 152 mm							
Category of mounting hardware	M (Medium)							
Weight	18 kg / 20 kg (clamps incl.)							
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter							

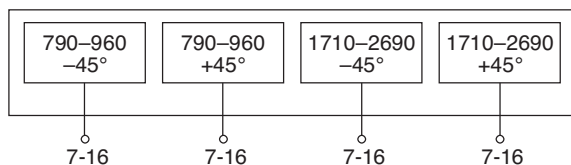

800/900 –
1800/2000/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 16/18.5dBi 0°–10°/0°–6°T

Type No.	742265v02						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	15.6 ... 15.5 ... 15.3	15.9 ... 15.8 ... 15.5	16.1 ... 16.0 ... 15.6	18.2 ... 18.5 ... 18.3	18.5 ... 18.7 ... 18.3	18.5 ... 18.7 ... 18.3	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	65°	65°	61°	
Front-to-back ratio, copolar	> 27 dB	> 28 dB	> 28 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	25 dB	25 dB	25 dB	25 dB	25 dB	25 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB			0.5 dB			
Squint	±2.5°			±2.5°			
Vertical Pattern:							
Half-power beam width	10.9°	10.6°	10°	5.0°	4.8°	4.6°	
Electrical tilt	0.5°–9.5°, continuously adjustable			0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0.5° ... 5° ... 9.5° T ≥ 15 ... 16 ... 17 dB	0.5° ... 5° ... 9.5° T ≥ 15 ... 17 ... 19 dB	0.5° ... 5° ... 9.5° T ≥ 15 ... 18 ... 19 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5			< 1.5			
Isolation: Intrasystem	> 30 dB			> 30 dB			
Isolation: Intersystem	> 45 dB, Typ. > 50 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 850 / 380 / 910 N						
Height/width/depth	1933 / 261 / 146 mm						
Category of mounting hardware	M (Medium)						
Weight	20 kg / 22 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

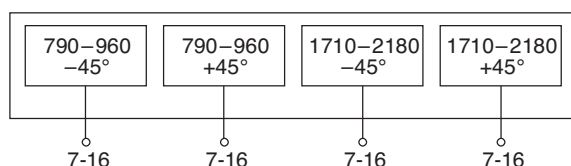

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 16/18.5dBi 0°–10°/0°–6°T

Type No.	80010771						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	15.4 ... 15.5 ... 15.2	15.5 ... 15.8 ... 15.3	15.8 ... 16.0 ... 15.4	18.3 ... 18.5 ... 18.2	18.5 ... 18.7 ... 18.3	18.2 ... 18.6 ... 18.2	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	69°	67°	65°	65°	62°	62°	
Front-to-back ratio, copolar	> 27 dB	> 28 dB	> 28 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Main direction	0°						
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB			0.5 dB			
Squint	±3.0°			±2.5°			
Vertical Pattern:							
Half-power beam width	11°	10.7°	10°	5.0°	4.8°	4.6°	
Electrical tilt	0°–10°, continuously adjustable			0°–6°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 5° ... 10° ≥ 17 ... 17 ... 17 dB	0° ... 5° ... 10° ≥ 17 ... 17 ... 18 dB	0° ... 5° ... 10° ≥ 17 ... 17 ... 16 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	
VSWR	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Isolation: Intersystem	> 30 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Max. power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female						
Connector position	Rearside						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rear: 680 / 380 / 890 N						
Height/width/depth	1934 / 260 / 140 mm						
Category of mounting hardware	M (Medium)						
Weight	15 kg / 17 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

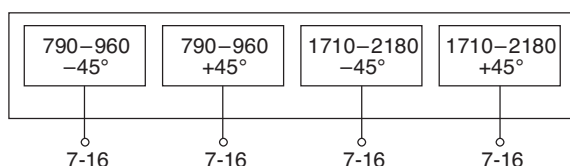

800/900 –
1800/2100/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 16.5/18.5dBi 2°–14°/4°–10°T

Type No.	80010485v01						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.2 ... 16.0 ... 15.7	16.3 ... 16.1 ... 15.8	16.4 ... 16.2 ... 15.8	18.0 ... 18.2 ... 17.7	18.4 ... 18.5 ... 17.8	18.7 ... 18.6 ... 18.0	
Tilt	2° ... 8° ... 14°	2° ... 8° ... 14°	2° ... 8° ... 14°	4° ... 9° ... 14°	4° ... 9° ... 14°	4° ... 9° ... 14°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	66°	64°	60°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	25 dB	25 dB	25 dB	20 dB	20 dB	21 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:							
Half-power beam width	10°	9.7°	9.3°	5°	4.7°	4.5°	
Electrical tilt	2°–14°, continuously adjustable			4°–14°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam	2° ... 8° ... 14° T 17 ... 17 ... 15 dB	2° ... 8° ... 14° T 17 ... 17 ... 16 dB	2° ... 8° ... 14° T 17 ... 17 ... 16 dB	4° ... 9° ... 14° T 20 ... 18 ... 15 dB	4° ... 9° ... 14° T 19 ... 18 ... 15 dB	4° ... 9° ... 14° T 18 ... 17 ... 15 dB	
Impedance	50 Ω						
VSWR	< 1.5						
Isolation: Intrasytem	> 30 dB						
Isolation: Intersystem	> 35 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)						
Max. power per input	400 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	800 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 750 / 380 / 900 N						
Height/width/depth	2038 / 262 / 139 mm						
Category of mounting hardware	M (Medium)						
Weight	24 kg / 26 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

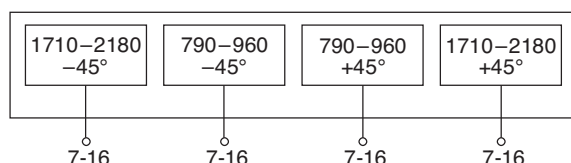

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°

65°

KATHREIN

Antennen · Electronic


XXPol Panel 790–960/1710–2180 C 65°/65° 16/18.5dBi 0°–10°/0°–6°T

Type No.	742224v02					clamps included
	790–960		1710–2180			
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	15.6 ... 15.5 ... 15.3	16.1 ... 16.0 ... 15.6	18.2 ... 18.5 ... 18.3	18.5 ... 18.7 ... 18.3	18.5 ... 18.7 ... 18.3	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:						
Half-power beam width	68°	65°	65°	65°	61°	
Front-to-back ratio, copolar	> 27 dB	> 28 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Main direction	0°					
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB		0.5 dB			
Squint	±2.5°		±2.5°			
Vertical Pattern:						
Half-power beam width	10.9°	10°	5.0°	4.8°	4.6°	
Electrical tilt	0.5°–9.5°, continuously adjustable		0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0.5° ... 5° ... 9.5° T ≥ 15 ... 16 ... 17 dB	0.5° ... 5° ... 9.5° T ≥ 15 ... 18 ... 19 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5					
Isolation: Intrasytem	> 30 dB					
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)					
Max. power per input	250 W*		200 W*			
Total power per combined input	450 W*					
Input	4 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	2x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 850 / 380 / 910 N					
Height/width/depth	1933 / 261 / 146 mm					
Category of mounting hardware	M (Medium)					
Weight	20 kg / 22 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					
Integrated combiner	The insertion loss is included in the given antenna gain values.					

* (at 50 °C ambient temperature)



800/900 –
1800/2000/2600
XXPol

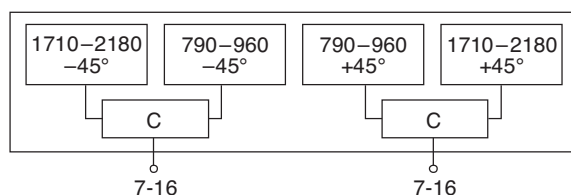

Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2690

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2690 65°/65° 16/18.5dBi 0°–10°/0°–6°T

Type No.	80010665							clamps included	
	790–960			1710–2690					
Frequency range	790 – 866 MHz	824 – 896 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz		
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°		
Average gain (dBi)	16.0 ... 16.0 ... 15.5	16.1 ... 16.1 ... 15.6	16.0 ... 16.2 ... 15.6	18.5 ... 18.4 ... 18.1	18.5 ... 18.4 ... 18.1	18.8 ... 18.7 ... 18.2	18.2 ... 18.3 ... 18.0		
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°		
Horizontal Pattern:									
Half-power beam width	68°	67°	65°	62°	63°	62°	63°		
Front-to-back ratio, copolar (180°±30°)	> 27 dB	> 27 dB	> 27 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB		
Cross polar ratio	Typically: 22 dB	Typically: 22 dB	Typically: 22 dB	Typically: 18 dB	Typically: 22 dB	Typically: 23 dB	Typically: 25 dB		
Main direction	0°								
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB		
Vertical Pattern:									
Half-power beam width	10.3°	10.1°	9.8°	4.5°	4.4°	4.1°	3.5°		
Electrical tilt	0°–10°, continuously adjustable			0°–6°, continuously adjustable					
Min. sidelobe supression for first sidelobe above main beam	0° ... 5° ... 10° T 18 ... 17 ... 15 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 17 ... 16 ... 16 dB	0° ... 3° ... 6° T 18 ... 18 ... 17 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 18 ... 17 dB		
VSWR	< 1.5								
Isolation: Intrasystem	> 30 dB			> 28 dB					
Isolation: Intersystem	> 30 dB (790–960 // 1710–2690 MHz)								
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)								
Max. power per input	500 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)					
Total power	1000 W (at 50 °C ambient temperature)			400 W (at 50 °C ambient temperature)					
Input	4 x 7-16 female (long neck)								
Connector position	Bottom								
Adjustment mechanism	2x, Position bottom continuously adjustable								
Wind load (at 150 km/h)	Frontal / lateral / rearside: 990 / 380 / 1030 N								
Height/width/depth	1997 / 300 / 152 mm								
Category of mounting hardware	M (Medium)								
Weight	24 kg / 26 kg (clamps incl.)								
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter								

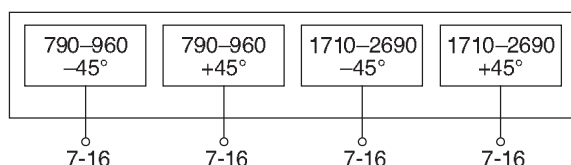

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 17/18.5dBi 0°–7°/0°–6°T

Type No.	742266v02						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.6 ... 16.6 ... 16.5	17.0 ... 16.9 ... 16.7	17.0 ... 17.1 ... 16.9	18.2 ... 18.5 ... 18.3	18.5 ... 18.7 ... 18.3	18.5 ... 18.7 ... 18.3	
Tilt	0° ... 3° ... 7°	0° ... 3° ... 7°	0° ... 3° ... 7°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	65°	65°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	0°	0°	0°	0°	0°	0°	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB			0.5 dB			
Squint	±2.5°			±2.5°			
Vertical Pattern:							
Half-power beam width	8.0°	7.7°	7.2°	5.0°	4.8°	4.6°	
Electrical tilt	0°–7°, continuously adjustable			0°–6°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 3° ... 7° T ≥ 17 ... 17 ... 15 dB	0° ... 3° ... 7° T ≥ 17 ... 17 ... 15 dB	0° ... 3° ... 7° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5			< 1.5			
Isolation: Intrasytem	> 30 dB			> 30 dB			
Isolation: Intersystem	> 45 dB, Typ. > 50 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1160 / 500 / 1210 N						
Height/width/depth	2533 / 261 / 146 mm						
Category of mounting hardware	H (Heavy)						
Weight	24 kg / 26 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

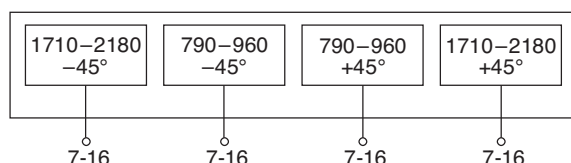

800/900 –
1800/2100/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 17/18.5dBi 0°–8°/0°–6°T

Type No.	80010772						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.6 ... 16.8 ... 16.6	16.8 ... 17.0 ... 16.7	16.8 ... 17.0 ... 16.7	18.4 ... 18.5 ... 18.0	18.5 ... 18.7 ... 18.1	18.4 ... 18.6 ... 18.0	
Tilt	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	65°	62°	62°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	0°	0°	0°	0°	0°	0°	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB			0.5 dB			
Squint	±3.0°			±2.5°			
Vertical Pattern:							
Half-power beam width	8.0°	7.9°	7.6°	5.0°	4.8°	4.6°	
Electrical tilt	0°–8°, continuously adjustable			0°–6°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 3° ... 6° T	0° ... 3° ... 6° T	0° ... 3° ... 6° T	
	≥ 16 ... 17 ... 16 dB	≥ 15 ... 17 ... 18 dB	≥ 15 ... 17 ... 18 dB	≥ 17 ... 16 ... 15 dB	≥ 17 ... 16 ... 15 dB	≥ 17 ... 16 ... 15 dB	
VSWR	< 1.5			< 1.5			
Isolation: Intrasytem	> 30 dB			> 30 dB			
Isolation: Intersystem	> 30 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Max. power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female						
Connector position	Rearside						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rear side: 840 / 480 / 1160 N						
Height/width/depth	2399 / 260 / 140 mm						
Category of mounting hardware	H (Heavy)						
Weight	17 kg / 19 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

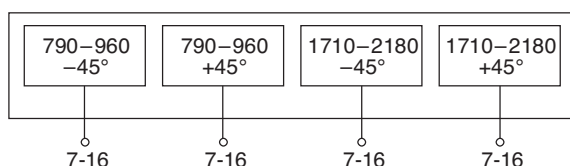

Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2690

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2690 65°/65° 17/18.5dBi 0°–10°/0°–6°T

Type No.	80010666							clamps included
	790–960			1710–2690				
Frequency range	790 – 866 MHz	824 – 896 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.8 ... 16.7 ... 16.5	17.0 ... 17.0 ... 16.8	17.1 ... 17.2 ... 17.0	18.5 ... 18.4 ... 18.1	18.5 ... 18.4 ... 18.1	18.8 ... 18.7 ... 18.2	18.2 ... 18.3 ... 18.0	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:								
Half-power beam width	68°	67°	65°	62°	63°	62°	63°	
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically: 24 dB	Typically: 23 dB	Typically: 22 dB	Typically: 18 dB	Typically: 22 dB	Typically: 23 dB	Typically: 25 dB	
Main direction	0°							
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:								
Half-power beam width	7.5°	7.4°	7.1°	4.5°	4.4°	4.1°	3.5°	
Electrical tilt	0.5°–9.5°, continuously adjustable			0°–6°, continuously adjustable				
Min. sidelobe supression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB	0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB	0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 17 ... 16 ... 16 dB	0° ... 3° ... 6° T 18 ... 18 ... 17 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 18 ... 17 dB	
VSWR	< 1.5							
Isolation: Intrasystem	> 30 dB			> 28 dB				
Isolation: Intersystem	> 30 dB (790–960 // 1710–2690 MHz)							
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)							
Max. power per input	500 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)				
Total power	1000 W (at 50 °C ambient temperature)			400 W (at 50 °C ambient temperature)				
Input	4 x 7-16 female (long neck)							
Connector position	Bottom							
Adjustment mechanism	2x, Position bottom continuously adjustable							
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1270 / 490 / 1320 N							
Height/width/depth	2622 / 300 / 152 mm							
Category of mounting hardware	H (Heavy)							
Weight	29 kg / 31 kg (clamps incl.)							
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter							

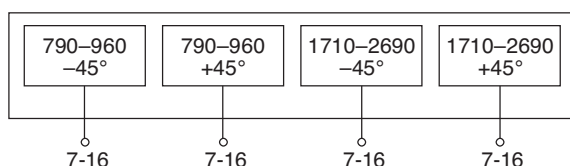

800/900 –
1800/2000/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°


65°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 65°/65° 17.5/18.5dBi 4°–12°/4°–14°T

Type No.	80010486v01						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.8 ... 16.7 ... 16.6	17.0 ... 16.8 ... 16.8	17.2 ... 17.0 ... 16.8	17.8 ... 18.1 ... 17.5	18.3 ... 18.3 ... 17.8	18.7 ... 18.7 ... 18.0	
Tilt	4° ... 8° ... 12°	4° ... 8° ... 12°	4° ... 8° ... 12°	4° ... 9° ... 14°	4° ... 9° ... 14°	4° ... 9° ... 14°	
Horizontal Pattern:							
Half-power beam width	68°	67°	66°	66°	64°	61°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction 0°	23 dB	24 dB	25 dB	18 dB	18 dB	20 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:							
Half-power beam width	7.5°	7.4°	7.2°	5°	4.8°	4.6°	
Electrical tilt	4°–12°, continuously adjustable			4°–14°, continuously adjustable			
Sidelobe supression	4° ... 8° ... 12° T	4° ... 8° ... 12° T	4° ... 8° ... 12° T	4° ... 9° ... 14° T	4° ... 9° ... 14° T	4° ... 9° ... 14° T	
– for first sidelobe above main beam	18 ... 17 ... 16 dB	19 ... 18 ... 18 dB	19 ... 18 ... 18 dB	20 ... 18 ... 16 dB	19 ... 19 ... 16 dB	18 ... 18 ... 18 dB	
– within 0°–20° sector above horizon	15 ... 15 ... 14 dB	16 ... 15 ... 14 dB	16 ... 15 ... 14 dB	17 ... 17 ... 15 dB	17 ... 17 ... 15 dB	17 ... 17 ... 15 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 45 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)						
Max. power per input	400 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	800 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 920 / 460 / 1150 N						
Height/width/depth	2516 / 262 / 139 mm						
Category of mounting hardware	H (Heavy)						
Weight	28 kg / 30 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

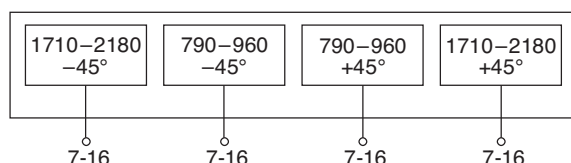

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

65°

65°


KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 C 65°/65° 17/18.5dBi 0°–7°/0°–6°T

Type No.	742225v02					clamps included
	790–960		1710–2180			
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.6 ... 16.6 ... 16.5	17.0 ... 17.1 ... 16.9	18.2 ... 18.5 ... 18.3	18.5 ... 18.7 ... 18.3	18.5 ... 18.7 ... 18.3	
Tilt	0° ... 3° ... 7°	0° ... 3° ... 7°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:						
Half-power beam width	68°	65°	65°	65°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically: 30 dB	Typically: 30 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Main direction	0°					
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB		0.5 dB			
Squint	±2.5°		±2.5°			
Vertical Pattern:						
Half-power beam width	7.7°	7.2°	5.0°	4.8°	4.6°	
Electrical tilt	0°–7°, continuously adjustable		0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0° ... 4° ... 7° T ≥ 17 ... 17 ... 15 dB	0° ... 4° ... 7° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5					
Isolation: Intrasytem	> 30 dB					
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)					
Max. power per input	250 W*		200 W*			
Total power per combined input	450 W*					
Input	4 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	2x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1160 / 500 / 1210 N					
Height/width/depth	2533 / 261 / 146 mm					
Category of mounting hardware	H (Heavy)					
Weight	24 kg / 26 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter					
Integrated combiner	The insertion loss is included in the given antenna gain values.					

* (at 50 °C ambient temperature)

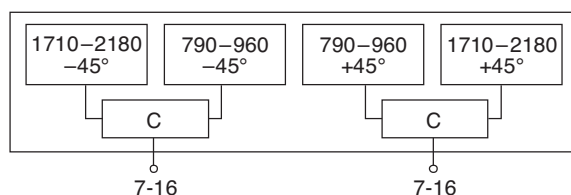

800/900 –
1800/2100/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

90°


90°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 90°/90° 13.5/16.5dBi 0°–13°/0°–10°T

Type No.	80010121v01						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	13.4 ... 13.4 ... 13.1	13.6 ... 13.6 ... 13.4	13.9 ... 13.8 ... 13.5	16.4 ... 16.4 ... 16.2	16.4 ... 16.5 ... 16.0	16.4 ... 15.9 ... 15.3	
Tilt	0.5° ... 6° ... 12.5°	0.5° ... 6° ... 12.5°	0.5° ... 6° ... 12.5°	0.5° ... 5° ... 10°	0.5° ... 5° ... 10°	0.5° ... 5° ... 10°	
Horizontal Pattern:							
Half-power beam width	88°	86°	88°	82°	85°	90°	
Front-to-back ratio, copolar	> 23 dB	> 23 dB	> 23 dB	> 23 dB	> 23 dB	> 23 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	0°						
Sector	±60°	> 10 dB	> 13 dB	> 10 dB	> 12 dB	> 10 dB	
	±60°	avg. 16 dB	avg. 19 dB	avg. 17 dB	avg. 19 dB	avg. 19 dB	
Vertical Pattern:							
Half-power beam width	15.0°	14.5°	14.0°	7.0°	6.6°	6.4°	
Electrical tilt	0.5°–12.5°, continuously adjustable			0.5°–10°, continuously adjustable			
Min. sidelobe supression for first sidelobe above main beam, average:	0.5° ... 6° ... 12.5° T 16 ... 14 ... 14 dB 20 ... 19 ... 16 dB	0.5° ... 6° ... 12.5° T 16 ... 15 ... 14 dB 20 ... 18 ... 17 dB	0.5° ... 6° ... 12.5° T 18 ... 16 ... 16 dB 22 ... 20 ... 20 dB	0.5° ... 5° ... 10° T 17 ... 17 ... 16 dB 20 ... 20 ... 18 dB	0.5° ... 5° ... 10° T 17 ... 18 ... 16 dB 21 ... 22 ... 17 dB	0.5° ... 5° ... 10° T 18 ... 16 ... 16 dB 20 ... 20 ... 16 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 42 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 420 / 260 / 620 N						
Height/width/depth	1384 / 262 / 149 mm						
Category of mounting hardware	M (Medium)						
Weight	21 kg / 23 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

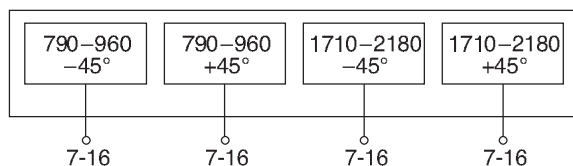

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

90°


90°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 90°/90° 15/18dBi 0°–10°/0°–6°T

Type No.	80010122v01						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 896 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	14.8 ... 14.8 ... 14.8	14.8 ... 15.0 ... 14.8	14.9 ... 15.1 ... 14.9	17.7 ... 17.8 ... 17.7	17.7 ... 18.0 ... 17.6	17.6 ... 17.8 ... 17.4	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	88°	87°	88°	82°	85°	90°	
Front-to-back ratio (180°±30°)	> 23 dB	> 23 dB	> 23 dB	> 23 dB	> 23 dB	> 23 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	0°	18 dB	18 dB	20 dB	17 dB	16 dB	15 dB
Sector	±60°	> 10 dB	> 10 dB	> 13 dB	> 10 dB	> 12 dB	> 10 dB
	±60°	avg. 16 dB	avg. 16 dB	avg. 19 dB	avg. 17 dB	avg. 19 dB	avg. 19 dB
Vertical Pattern:							
Half-power beam width	11.0°	10.9°	10.5°	5.5°	5.2°	5.0°	
Electrical tilt	0°–10°, continuously adjustable			0°–6°, continuously adjustable			
Min. sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T 18 ... 16 ... 14 dB	0° ... 5° ... 10° T 16 ... 16 ... 15 dB	0° ... 5° ... 10° T 16 ... 16 ... 15 dB	0° ... 3° ... 6° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 18 ... 16 ... 16 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 42 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 580 / 360 / 870 N						
Height/width/depth	1917 / 262 / 149 mm						
Category of mounting hardware	M (Medium)						
Weight	27 kg / 29 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

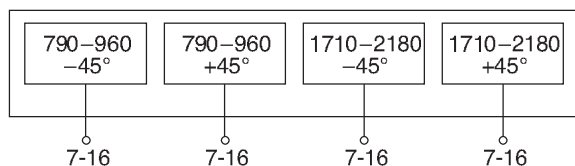

800/900 –
1800/2100/2600
XXPol

Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

X

X

90°


90°

KATHREIN

Antennen · Electronic

XXPol Panel 790–960/1710–2180 90°/90° 16.5/18dBi 0°–7°/0°–6°T

Type No.	80010123v03						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.1 ... 16.2 ... 16.1	16.3 ... 16.4 ... 16.3	16.5 ... 16.6 ... 16.5	17.8 ... 17.7 ... 17.4	18.0 ... 17.9 ... 17.4	17.9 ... 17.8 ... 17.3	
Tilt	0.5° ... 4° ... 7°	0.5° ... 4° ... 7°	0.5° ... 4° ... 7°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	86°	86°	86°	84°	85°	88°	
Front-to-back ratio, copolar	> 25 dB	> 25 dB	> 25 dB	> 23 dB	> 23 dB	> 23 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	0°						
Sector	±60°						
	±60°						
Tracking, Avg.	0.5 dB			0.5 dB			
Squint	±3.0°			±3.0°			
Vertical Pattern:							
Half-power beam width	7.3°	7.2°	6.9°	4.8°	4.5°	4.2°	
Electrical tilt	0.5°–7°, continuously adjustable			0°–6°, continuously adjustable			
Min. sidelobe supression for first sidelobe above main beam	0.5° ... 4° ... 7° T 15 ... 14 ... 14 dB	0.5° ... 4° ... 7° T 15 ... 14 ... 14 dB	0.5° ... 4° ... 7° T 15 ... 14 ... 15 dB	0° ... 3° ... 6° T 18 ... 17 ... 16 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 16 ... 17 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 45 dB (790–960 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	4 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	2x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 840 / 510 / 1260 N						
Height/width/depth	2635 / 262 / 149 mm						
Category of mounting hardware	H (Heavy)						
Weight	33 kg / 35 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

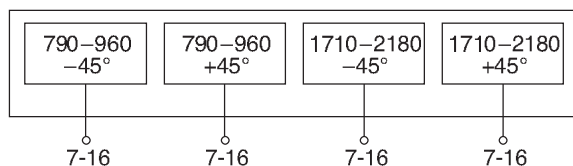

Summary – Directional Antennas

Triple-band

800/900 – 1800/2000/2600

Dual Polarization +45°/–45°

Type	Type No.	Height [mm]	Connector position	Page
XXXPol Panel 790–862 65° 14dBi 0°–14°T	80010697	1332	bottom	126
880–960 65° 14dBi 0°–14°T				
1710–2180 65° 17dBi 0°–8°T				
XXXPol Panel 790–862 65° 15.5dBi 0°–10°T	80010698	1932	bottom	127
880–960 65° 16dBi 0°–10°T				
1710–2180 65° 18.5dBi 0°–6°T				
XXXPol Panel 790–862 65° 16.5dBi 0°–7°T	80010699	2532	bottom	128
880–960 65° 17dBi 0°–7°T				
1710–2180 65° 18.5dBi 0°–6°T				
XXXPol Panel 790–960 65° 15dBi 0°–14°T	742270v03	1384	bottom	129
1710–1880 65° 17dBi 0°–8°T				
1920–2170 65° 17dBi 0°–8°T				
XXXPol Panel 790–960 C 65° 15dBi 0°–12°T	80010670v01	1498	bottom	130
1710–1880 65° 16.5dBi 0°–8°T				
1920–2170 65° 17dBi 0°–8°T				
XXXPol Panel 806–960 65° 15dBi 0°–14°T	80010290v01	1540	bottom	131
1710–2180 65° 15dBi 0°–14°T				
1710–2180 65° 15dBi 0°–14°T				
XXXPol Panel 790–960 65° 16.5dBi 0°–10°T	742271v03	1933	bottom	132
1710–1880 65° 18dBi 0°–6°T				
1920–2170 65° 18dBi 0°–6°T				
XXXPol Panel 806–960 C 65° 16.5dBi 0°–10°T	80010671v01	2058	bottom	133
1710–1880 65° 17.5dBi 0°–6°T				
1920–2170 65° 18dBi 0°–6°T				
XXXPol Panel 790–960 65° 16.5dBi 2°–14°T	80010291v02	2058	bottom	134
1710–2180 65° 16.5dBi 0°–14°T				
1710–2180 65° 16.5dBi 0°–14°T				
XXXPol Panel 790–960 65° 17dBi 0°–10°T	80010692	2622	bottom	135
1710–2690 65° 17dBi 0°–10°T				
1710–2690 65° 17dBi 2°–10°T				
XXXPol Panel 790–960 65° 17.5dBi 0°–7°T	742272v03	2533	bottom	136
1710–1880 65° 18dBi 0°–6°T				
1920–2170 65° 18dBi 0°–6°T				
XXXPol Panel 790–960 C 65° 17.5dBi 0°–7°T	80010672v01	2628	bottom	137
1710–1880 65° 17.5dBi 0°–6°T				
1920–2170 65° 18dBi 0°–6°T				
XXXPol Panel 790–960 65° 17.5dBi 2°–10°T	80010292v03	2598	bottom	138
1710–2180 65° 17.5dBi 0°–10°T				
1710–2180 65° 17dBi 0°–10°T				
XXXPol Panel 790–960 65° 17.5dBi 4°–12°T	80010492v01	2694	bottom	139
1710–2180 65° 17dBi 0°–14°T				
1710–2180 65° 17dBi 0°–14°T				

C = integrated Combiner

New or changed product

Summary – Directional Antennas

Triple-band

800/900 – 1800/2000/2600

Dual Polarization +45°/–45°

Type	Type No.	Height [mm]	Connector position	Page
XXXPol Panel 790–960 65° 15dBi 0°–16°T	80010674	1403	bottom	140
1710–2170 65° 17dBi 2°–10°T				
2490–2690 65° 16.5dBi 2°–10°T				
XXXPol Panel 790–960 65° 16dBi 0°–10°T	80010675	1997	bottom	141
1710–2170 65° 18dBi 0°–6°T				
2490–2690 65° 18dBi 0°–6°T				
XXXPol Panel 790–960 65° 17dBi 0°–10°T	80010676	2622	bottom	142
1710–2170 65° 18dBi 0°–6°T				
2490–2690 65° 18dBi 0°–6°T				
XXXPol Panel 790–960 65° 16dBi 0°–10°T	80010691	1997	bottom	143
1710–2690 65° 16dBi 2°–12°T				
1710–2690 65° 16dBi 2°–12°T				

C = integrated Combiner

New or changed product

When deploying
Triple-band Antennas,
please also consider using
special Triple-band Combiners
(see page 241)

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–862

880–960

1710–2180

KATHREIN

X

X

X

Antennen · Electronic

65°


65°

65°

XXXPol Panel 790–862/880–960/1710–2180 65°/65°/65° 14/14/17dBi 0°–14°/0°–14°/0°–8°T

Type No.	80010697					clamps included
	790–862	880–960	1710–2180			
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	13.9 ... 13.9 ... 13.3	14.2 ... 14.1 ... 13.5	16.7 ... 16.9 ... 16.7	16.9 ... 17.1 ... 16.7	16.9 ... 17.1 ... 16.8	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 4° ... 8°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:						
Half-power beam width	68°	65°	64°	63°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 32 dB	> 32 dB	> 32 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	0°	25 dB	25 dB	25 dB	25 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:						
Half-power beam width	16.5°	15.4°	7.4°	7.1°	6.7°	
Electrical tilt continuously adjustable	0°–14°	0°–14°	0°–8°			
Sidelobe suppression for first sidelobe above main beam: average:	0° ... 7° ... 14° T ≥ 17 ... 17 ... 15 dB	0° ... 7° ... 14° T ≥ 17 ... 17 ... 16 dB	0° ... 4° ... 8° T ≥ 17 ... 16 ... 15 dB	0° ... 4° ... 8° T ≥ 17 ... 17 ... 16 dB	0° ... 4° ... 8° T ≥ 17 ... 17 ... 16 dB	
VSWR	< 1.5	< 1.5	< 1.5			
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB			
Isolation: Intersystem	> 38 dB (790...960 // 1710–2180 MHz) > 28 dB, Typ. > 30 dB (790–862 // 880–960MHz)					
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc	< –150 dBc			
Max. power per input	250 W*	250 W*	250 W*			
Totel power	500 W*	500 W*	500 W*			
Input	6 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	3x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 670 / 260 / 700 N					
Height/width/depth	1332 / 300 / 152 mm					
Category of mounting hardware	M (Medium)					
Weight	21 kg / 23 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					

clamps included

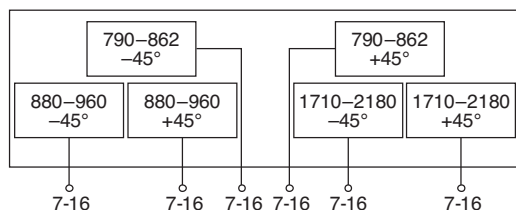

*(at 50 °C ambient temperature)

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–862 880–960 1710–2180

X X X

65° 65° 65°

KATHREIN

Antennen · Electronic


XXXPol Panel 790–862/880–960/1710–2180 65°/65°/65° 15.5/16/18.5dBi 0°–10°/0°–10°/0°–6°T

Type No.	80010698					clamps included
	790–862	880–960	1710–2180			
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	15.1 ... 15.4 ... 15.1	15.6 ... 15.9 ... 15.4	18.2 ... 18.5 ... 18.3	18.5 ... 18.7 ... 18.3	18.5 ... 18.7 ... 18.3	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:						
Half-power beam width	68°	65°	65°	65°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically: 25 dB	Typically: 27 dB	Typically: 25 dB	Typically: 25 dB	Typically: 25 dB	
Maindirection	0°					
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB	1.0 dB	0.5 dB			
Squint	±2.5°	±2.5°	±2.5°			
Vertical Pattern:						
Half-power beam width	11.5°	10.1°	5.0°	4.8°	4.6°	
Electrical tilt, continuously adjustable	0°–10°	0°–10°	0°–6°			
Sidelobe suppression for first sidelobe above main beam: average:	0° ... 5° ... 10° T ≥ 17 ... 17 ... 17 dB	0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5	< 1.5	< 1.5			
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB			
Isolation: Intersystem	> 38 dB (790...960 // 1710–2180 MHz) > 28 dB, Typ. > 30 dB (790–862 // 880–960MHz)					
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc	< –150 dBc			
Max. power per input	250 W*	250 W*	250 W*			
Totel power	500 W*	500 W*	500 W*			
Input	6 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	3x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 850 / 380 / 910 N					
Height/width/depth	1932 / 269 / 154 mm					
Category of mounting hardware	M (Medium)					
Weight	23 kg / 25 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					

* (at 50 °C ambient temperature)



800/900 –
1800/2000/2600
XXXPol

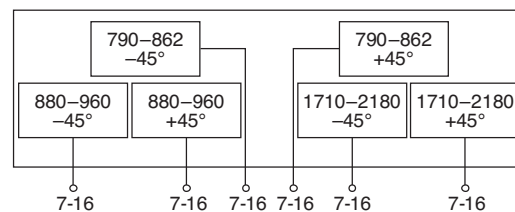

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–862 880–960 1710–2180

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–862/880–960/1710–2180 65°/65°/65° 16.5/17/18.5dBi 0°–7°/0°–7°/0°–6°T

Type No.	80010699					clamps included
	790–862	880–960	1710–2180			
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.3 ... 16.4 ... 16.2	16.7 ... 16.9 ... 16.6	18.2 ... 18.5 ... 18.3	18.5 ... 18.7 ... 18.3	18.5 ... 18.7 ... 18.3	
Tilt	0° ... 4° ... 7°	0° ... 4° ... 7°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:						
Half-power beam width	68°	65°	65°	65°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	25 dB	27 dB	25 dB	25 dB	25 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:						
Half-power beam width	8.3°	7.6°	5.0°	4.8°	4.6°	
Electrical tilt, continuously adjustable	0°–7°	0°–7°	0°–6°			
Sidelobe suppression for first sidelobe above main beam: average:	0° ... 4° ... 7° T ≥ 17 ... 16 ... 16 dB	0° ... 4° ... 7° T ≥ 18 ... 17 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5	< 1.5	< 1.5			
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB			
Isolation: Intersystem	> 38 dB (790...960 // 1710–2180 MHz) > 28 dB, Typ. > 30 dB (790–862 // 880–960MHz)					
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc	< –150 dBc	< –150 dBc			
Max. power per input	250 W*	250 W*	250 W*			
Totel power	500 W*	500 W*	500 W*			
Input	6 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	3x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1160 / 500 / 1210 N					
Height/width/depth	2532 / 269 / 154 mm					
Category of mounting hardware	H (Heavy)					
Weight	26 kg / 28 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					

*(at 50 °C ambient temperature)

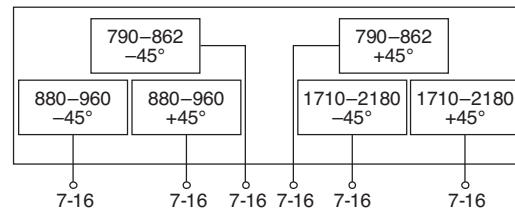

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1710–2170

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–1880/1920–2170 65°/65°/65° 15/17/17dBi 0°–14°/0°–8°/0°–8°T

Type No.	742270v03				clamps included
	790–960		1710–1880	1710–2170	
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1170 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	14.4 ... 14.3 ... 14.0	14.8 ... 14.7 ... 14.2	16.8 ... 16.9 ... 16.6	16.9 ... 17.0 ... 16.7	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 4° ... 8°	0° ... 4° ... 8°	
Horizontal Pattern:					
Half-power beam width	68°	65°	65°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 32 dB	> 32 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	
Maindirection	0°	0°	0°	0°	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB		0.5 dB	0.5 dB	
Squint	±2.0°		±3.0°	±3.0°	
Vertical Pattern:					
Half-power beam width	16.5°	15.3°	7.4°	6.7°	
Electrical tilt, contin. adjust.	0°–14°		0°–8°	0°–8°	
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 7° ... 14° T 17 ... 16 ... 15 dB	0° ... 7° ... 14° T 17 ... 18 ... 17 dB	0° ... 4° ... 8° T 17 ... 17 ... 16 dB	0° ... 4° ... 8° T 16 ... 16 ... 15 dB	
VSWR	< 1.5		< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB		> 30 dB	> 30 dB	
Isolation: Intersystem	Typically: > 50 dB (790–960 // 1710–1880 MHz) Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz)				
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc		< –150 dBc	< –150 dBc	
Max. power per input	500 W*		200 W*	200 W*	
Total power	1000 W*		400 W*	400 W*	
Input	6 x 7-16 female (long neck)				
Connector position	Bottom				
Adjustment mechanism	3x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 600 / 270 / 640 N				
Height/width/depth	1384 / 261 / 146 mm				
Category of mounting hardware	M (Medium)				
Weight	19 kg / 21 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

*(at 50 °C ambient temperature)

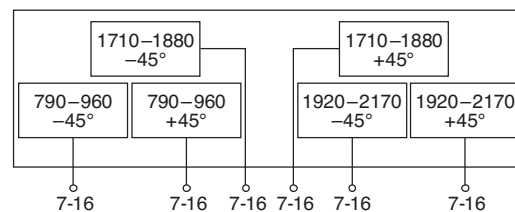

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170

X X X


65° 65° 65°

KATHREIN

Antennen · Electronic

XXXPoI Panel 790–960/1710–1880/1920–2170 C 65°/65°/65° 15/16.5/17dBi 0°–12°/0°–8°/0°–8°T

Type No.	80010670v01					clamps included
Frequency range	790 – 866 MHz	790–960 824 – 894 MHz	880 – 960 MHz	1710 – 18800 MHz 1710–1880	1920 – 2170 MHz 1920–2170	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 14.8 dBi	2 x 15 dBi	2 x 15.2 dBi	2 x 16.5 dBi	2 x 17.2 dBi	
Horizontal Pattern:						
Half-power beam width	69°	67°	65°	66°	65°	
Front-to-back ratio, copolar	> 27 dB			> 25 dB	> 25 dB	
Cross polar ratio	Typically: 25 dB			Typically: 16 dB	Typically: 18 dB	
Main direction	0°			0°	0°	
Sector	±60°	> 10 dB		> 10 dB	> 10 dB	
Vertical Pattern:						
Half-power beam width	14°	13.6°	13°	6.7°	6.2°	
Electrical tilt, contin. adjust.	0.5°–12°			0.5°–8°	0°–8°	
Sidelobe suppression for first sidelobe above main beam	0° ... 6° ... 12° T 17 ... 17 ... 14 dB			0° ... 4° ... 8° T 18 ... 16 ... 14 dB	0° ... 4° ... 8° T 18 ... 16 ... 15 dB	
VSWR	< 1.5					
Isolation: Intrasystem	> 30 dB					
Isolation: Intersystem	Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170MHz)					
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc				< –150 dBc	
Max. power per input	250 W		200 W		200 W	
	(at 50 °C ambient temperature)					
Max. power per combined input	450 W (at 50 °C ambient temperature)					
Input	4 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	3x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 460 / 290 / 680 N					
Height/width/depth	1498 / 262 / 149 mm					
Category of mounting hardware	M (Medium)					
Weight	21.5 kg / 23.5 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					
Integrated combiner	The insertion loss is included in the given antenna gain values.					

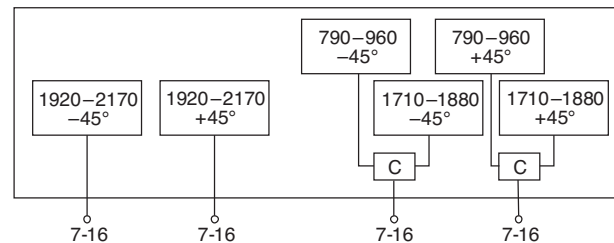

Triple-band Panel

Dual Polarization

Half-power Beam Width

806–960

1710–2180

1710–2180

KATHREIN

X

X

X

Antennen · Electronic


65°

65°

65°

XXXPol Panel 806–960/1710–2180/1710–2180 65°/65°/65° 15/15/15dBi 0°–14°/0°–14°/0°–14°T

Type No.	80010290v01						clamps included
	806–960			1710–2180			1710–2180
Frequency range	806 – 866 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain: (dBi)	14.4 ... 14.3 ... 14.0	14.6 ... 14.4 ... 14.2	14.9 ... 14.7 ... 14.4	14.5 ... 14.5 ... 14.2	14.8 ... 14.8 ... 14.5	15.1 ... 14.8 ... 14.4	
1710–2180 MHz (Syst. bottom)				14.0 ... 14.0 ... 13.7	14.4 ... 14.3 ... 13.9	14.9 ... 14.8 ... 14.2	
1710–2180 MHz (Syst. top)				0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	
Tilt	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	
Horizontal Pattern:							
Half-power beam width	69°	68°	67°	67°	63°	60°	
Front-to-back ratio (180°±30°)	> 25 dB			> 25 dB			
Cross polar ratio	Typically:			Typically:			
Maindirection	25 dB			20 dB			
Sector	> 10 dB			> 10 dB			
Vertical Pattern:							
Half-power beam width	14.7°	14.3°	13.9°	13.8°	13.2°	12.6°	
Electrical tilt	0°–14°, continuously adjustable			Syst. bottom: 0°–14°, continuously adjustable Syst. top: 0°–14°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	0° ... 7° ... 14° T 18 ... 16 ... 16 dB	0° ... 7° ... 14° T 18 ... 16 ... 16 dB	0° ... 7° ... 14° T 18 ... 17 ... 16 dB	0° ... 7° ... 14° T 18 ... 16 ... 15 dB	0° ... 7° ... 14° T 18 ... 17 ... 17 dB	0° ... 7° ... 14° T 18 ... 16 ... 17 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 35 dB (806–960 // 1710–2180 MHz) > 30 dB (1710–2180 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	400 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Input	6 x 7-16 female						
Connector position	Bottom						
Adjustment mechanism	3x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 480 / 300 / 700 N						
Height/width/depth	1540 / 262 / 149 mm						
Category of mounting hardware	M (Medium)						
Weight	21 kg / 23 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

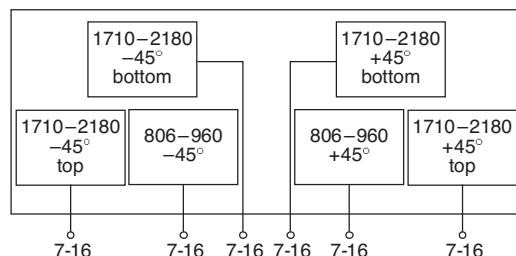

800/900 –
1800/2000/2600
XXXPol

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–1880/1920–2170 65°/65°/65° 16.5/18/18dBi 0°–10°/0°–6°/0°–6°T

Type No.	742271v03				clamps included
	790–960		1710–1880	1710–2170	
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1170 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	15.9 ... 15.8 ... 15.6	16.4 ... 16.3 ... 15.9	17.8 ... 18.0 ... 17.8	17.9 ... 18.2 ... 17.9	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:					
Half-power beam width	68°	65°	65°	61°	
Front-to-back ratio, copolar	> 27 dB	> 28 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	
Maindirection	25 dB	25 dB	25 dB	25 dB	
Sector	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB		0.5 dB	0.5 dB	
Squint	±2.5°		±2.5°	±2.5°	
Vertical Pattern:					
Half-power beam width	10.9°	10°	5.0°	4.6°	
Electrical tilt, contin. adjust.	0°–10°		0°–6°	0°–6°	
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 5° ... 10° T ≥ 15 ... 16 ... 17 dB	0° ... 5° ... 10° T ≥ 15 ... 18 ... 19 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5		< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB		> 30 dB	> 30 dB	
Isolation: Intersystem	Typically: > 50 dB (790–960 // 1710–1880 MHz) Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz)				
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc		< –150 dBc	< –150 dBc	
Max. power per input	300 W*		200 W*	200 W*	
Total power	600 W*		400 W*	400 W*	
Input	6 x 7-16 female (long neck)				
Connector position	Bottom				
Adjustment mechanism	3x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 860 / 380 / 920 N				
Height/width/depth	1933 / 261 / 146 mm				
Category of mounting hardware	M (Medium)				
Weight	24 kg / 26 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter				

* (at 50 °C ambient temperature)

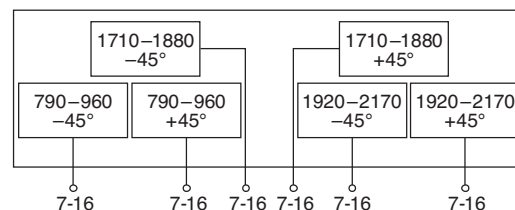

Triple-band Panel

Dual Polarization

Half-power Beam Width

806–960

1710–1880

1920–2170

KATHREIN

X

X

X

Antennen · Electronic


65°

65°

65°

XXXPol Panel 806–960/1710–1880/1920–2170 C 65°/65°/65° 16.5/17.5/18dBi 0°–10°/0°–6°/0°–6°T

Type No.	80010671v01					clamps included
	806–960			1710–1880	1920–2170	
Frequency range	806 – 866 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 16 dBi	2 x 16.1 dBi	2 x 16.3 dBi	2 x 17.5 dBi	2 x 18 dBi	
Horizontal Pattern:						
Half-power beam width	69°	68°	67°	65°	65°	
Front-to-back ratio, copolar	> 25 dB			> 24 dB	> 25 dB	
Cross polar ratio	Typically: 25 dB			Typically: 18 dB	Typically: 20 dB	
Main direction	0°					
Sector	±60°	> 10 dB			> 10 dB	> 10 dB
Vertical Pattern:						
Half-power beam width	9.5°	9.3°	9.0°	4.7°	4.3°	
Electrical tilt, contin. adjust.	0°–10°			0°–6°	0°–6°	
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T 15 ... 15 ... 13 dB			0° ... 3° ... 6° T 18 ... 17 ... 16 dB	0° ... 3° ... 6° T 18 ... 16 ... 15 dB	
VSWR	< 1.5					
Isolation: Intrasystem	> 30 dB					
Isolation: Intersystem	Typically: > 50 dB (806–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170MHz)					
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc					< –150 dBc
Max. power per input	250 W			200 W	200 W	
	(at 50 °C ambient temperature)					
Max. power per combined input	450 W (at 50 °C ambient temperature)					
Input	4 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	3x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 640 / 400 / 950 N					
Height/width/depth	2058 / 262 / 149 mm					
Category of mounting hardware	M (Medium)					
Weight	28 kg / 30 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter					
Integrated combiner	The insertion loss is included in the given antenna gain values.					

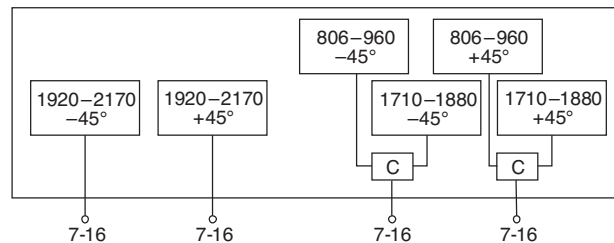

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2180

1710–2180

KATHREIN

X

X

X

Antennen · Electronic


65°

65°

65°

XXXPol Panel 790–960/1710–2180/1710–2180 65°/65°/65° 16.5/16.5/16.5dBi 2°–14°/0°–14°/0°–14°T

Type No.	80010291 v02						clamps included
	790–960			1710–2180		1710–2180	
Frequency range	790 – 866 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain: (dBi)	16.2 ... 16.0 ... 15.7	16.3 ... 16.1 ... 15.8	16.4 ... 16.2 ... 15.8	15.9 ... 15.9 ... 15.5	16.2 ... 16.2 ... 15.7	16.3 ... 16.3 ... 15.8	
1710–2180 MHz (Syst. bottom)				15.8 ... 15.8 ... 15.4	16.1 ... 16.1 ... 15.4	16.3 ... 16.2 ... 15.5	
1710–2180 MHz (Syst. top)				0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	
Tilt	2° ... 8° ... 14°	2° ... 8° ... 14°	2° ... 8° ... 14°				
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	65°	64°	60°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction	25 dB	25 dB	25 dB	18 dB	19 dB	20 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking	1.0 dB			1.0 dB			
Vertical Pattern:							
Half-power beam width	10°	9.7°	9.3°	9.5°	9°	8.7°	
Electrical tilt	2°–14°, continuously adjustable			0°–14°, continuously adjustable			
Sidelobe suppression for first sidelobe above main beam	2° ... 8° ... 14° T 17 ... 17 ... 15 dB	2° ... 8° ... 14° T 17 ... 17 ... 16 dB	2° ... 8° ... 14° T 17 ... 17 ... 16 dB	0° ... 7° ... 14° T 18 ... 17 ... 17 dB	0° ... 7° ... 14° T 18 ... 17 ... 17 dB	0° ... 7° ... 14° T 18 ... 17 ... 17 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 35 dB (790–960 // 1710–2180 MHz) > 30 dB (1710–2180 // 1710–2180 MHz)						
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)						
Max. power per input	400 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Input	6 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	3x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 640 / 400 / 950 N						
Height/width/depth	2058 / 262 / 149 mm						
Category of mounting hardware	M (Medium)						
Weight	27 kg / 29 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

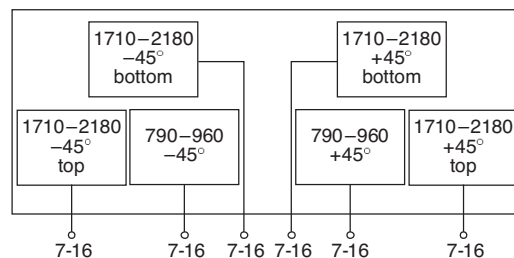

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2690 1710–2690

X X X


65° 65° 65°

KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2690/1710–2690 65°/65°/65° 17/17/17dBi 0°–10°/0°–10°/2°–10°T

Type No.	80010692							clamps included
	790–960			1710–2690		1710–2690		
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain: (dBi)	16.8 ... 16.7 ... 16.5	17.0 ... 17.0 ... 16.8	17.1 ... 17.2 ... 17.0	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
1710–2690 MHz (Syst. bottom)	16.4 ... 16.4 ... 16.1	16.6 ... 16.7 ... 16.4	16.7 ... 16.9 ... 16.1	16.4 ... 16.4 ... 16.1	16.6 ... 16.7 ... 16.4	16.7 ... 16.9 ... 16.1	16.2 ... 16.9 ... 16.4	
1710–2690 MHz (Syst. top)	16.6 ... 16.6 ... 16.1	16.4 ... 16.4 ... 15.9	16.3 ... 16.4 ... 15.9	16.4 ... 16.4 ... 15.9	16.6 ... 16.7 ... 16.4	16.7 ... 16.9 ... 16.1	16.2 ... 17.0 ... 16.4	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	2° ... 6° ... 10°	2° ... 6° ... 10°	2° ... 6° ... 10°	2° ... 6° ... 10°	
Horizontal Pattern:								
Half-power beam width	68°	67°	65°	Syst. bottom: 64° Syst. top: 60°	Syst. bottom: 62° Syst. top: 63°	Syst. bottom: 60° Syst. top: 65°	Syst. bottom: 65° Syst. top: 67°	
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically: 24 dB	Typically: 23 dB	Typically: 22 dB	Typically: 18 dB	Typically: 20 dB	Typically: 20 dB	Typically: 20 dB	
Maindirection 0°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:								
Half-power beam width	7.5°	7.4°	7.1°	Syst. bottom: 7.7° Syst. top: 6.5°	Syst. bottom: 7.4° Syst. top: 6.3°	Syst. bottom: 7.0° Syst. top: 6.0°	Syst. bottom: 5.9° Syst. top: 5.0°	
Electrical tilt	0.5°–9.5°, continuously adjustable			0°–10° (Syst. bottom), 2°–10° (Syst. top), continuously adjustable				
Min. sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB	0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB	0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB	Syst. bottom: 0° ... 5° ... 10° T 18 ... 15 ... 14 dB Syst. top: 2° ... 6° ... 10° T 14 ... 16 ... 18 dB	Syst. bottom: 0° ... 5° ... 10° T 18 ... 17 ... 16 dB Syst. top: 2° ... 6° ... 10° T 15 ... 17 ... 18 dB	Syst. bottom: 0° ... 5° ... 10° T 18 ... 18 ... 16 dB Syst. top: 2° ... 6° ... 10° T 17 ... 18 ... 18 dB	Syst. bottom: 0° ... 5° ... 10° T 18 ... 18 ... 16 dB Syst. top: 2° ... 6° ... 10° T 17 ... 18 ... 17 dB	
VSWR								
< 1.5								
Isolation: Intrasystem	> 30 dB			> 28 dB				
Isolation: Intersystem	> 36 dB (790–960 // 1710–2690 MHz) > 36 dB (1710–2690 // 1710–2690MHz)							
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)							
Max. power per input	500 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)				
Total power	1000 W (at 50 °C ambient temperature)			400 W (at 50 °C ambient temperature)				
Input	6 x 7-16 female (long neck)							
Connector position	Bottom							
Adjustment mechanism	3x, Position bottom continuously adjustable							
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1380 / 520 / 1490 N							
Height/width/depth	2622 / 300 / 152 mm							
Category of mounting hardware	H (Heavy)							
Weight	31 kg / 33 kg (clamps incl.)							
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter							

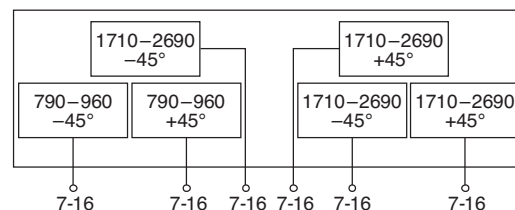

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–1880/1920–2170 65°/65°/65° 17.5/18/18dBi 0°–7°/0°–6°/0°–6°T

Type No.	742272v03				clamps included
	790–960		1710–1880	1920–2170	
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1170 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.9 ... 16.9 ... 16.8	17.3 ... 17.4 ... 17.2	17.8 ... 18.0 ... 17.8	17.9 ... 18.2 ... 17.9	
Tilt	0° ... 3° ... 7°	0° ... 3° ... 7°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:					
Half-power beam width	68°	65°	65°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	
Maindirection	0°	0°	0°	0°	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.0 dB		0.5 dB	0.5 dB	
Squint	±2.5°		±2.5°	±2.5°	
Vertical Pattern:					
Half-power beam width	8.0°	7.2°	5.0°	4.6°	
Electrical tilt, contin. adjust.	0°–7°		0°–6°	0°–6°	
Sidelobe suppression for first sidelobe above main beam avg.	0° ... 4° ... 7° T ≥ 17 ... 17 ... 15 dB	0° ... 4° ... 7° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 17 ... 15 dB	0° ... 3° ... 6° T ≥ 18 ... 18 ... 16 dB	
VSWR	< 1.5		< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB		> 30 dB	> 30 dB	
Isolation: Intersystem	Typically: > 50 dB (790–960 // 1710–1880 MHz) Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170 MHz)				
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc		< –150 dBc	< –150 dBc	
Max. power per input	500 W*		250 W*	250 W*	
Total power	1000 W*		500 W*	500 W*	
Input	6 x 7-16 female (long neck)				
Connector position	Bottom				
Adjustment mechanism	3x, Position bottom continuously adjustable				
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1160 / 500 / 1210 N				
Height/width/depth	2533 / 261 / 146 mm				
Category of mounting hardware	H (Heavy)				
Weight	29 kg / 31 kg (clamps incl.)				
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter				

*(at 50 °C ambient temperature)

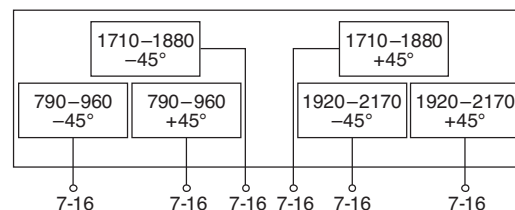

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170

X X X

65° 65° 65°

KATHREIN


Antennen · Electronic

XXXPol Panel 790–960/1710–1880/1920–2170 C 65°/65°/65° 17.5/17.5/18dBi 0°–7°/0°–6°/0°–6°T

Type No.	80010672v01					clamps included
	790–960		1710–1880		1920–2170	
Frequency range	790 – 866 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1920 – 2170 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain	2 x 17 dBi	2 x 17.2 dBi	2 x 17.5 dBi	2 x 17.5 dBi	2 x 18 dBi	
Horizontal Pattern:						
Half-power beam width	69°	68°	66°	65°	63°	
Front-to-back ratio, copolar	> 25 dB			> 25 dB	> 25 dB	
Cross polar ratio	Typically: 25 dB			Typically: 14 dB	Typically: 17 dB	
Maindirection 0°	25 dB			14 dB	17 dB	
Sector ±60°	> 10 dB			> 10 dB	> 10 dB	
Vertical Pattern:						
Half-power beam width	7.4°	7.2°	6.8°	4.7°	4.4°	
Electrical tilt, contin. adjust.	0.5°–7°			0°–6°	0°–6°	
Sidelobe suppression for first sidelobe above main beam	0° ... 4° ... 7° T 15 ... 16 ... 16 dB			0° ... 3° ... 6° T 17 ... 17 ... 16 dB	0° ... 3° ... 6° T 17 ... 15 ... 14 dB	
VSWR	< 1.5					
Isolation: Intrasystem	> 30 dB					
Isolation: Intersystem	Typically: > 50 dB (790–960 // 1920–2170 MHz) > 30 dB (1710–1880 // 1920–2170MHz)					
Intermodulation IM3 (2 x 43 dBm carrier)	< –150 dBc				< –150 dBc	
Max. power per input	250 W		200 W		200 W	
	(at 50 °C ambient temperature)					
Max. power per combined input	450 W (at 50 °C ambient temperature)					
Input	4 x 7-16 female (long neck)					
Connector position	Bottom					
Adjustment mechanism	3x, Position bottom continuously adjustable					
Wind load (at 150 km/h)	Frontal / lateral / rearside: 850 / 510 / 1270 N					
Height/width/depth	2628 / 262 / 149 mm					
Category of mounting hardware	H (Heavy)					
Weight	32 kg / 34 kg (clamps incl.)					
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter					
Integrated combiner	The insertion loss is included in the given antenna gain values.					



800/900 –
1800/2000/2600
XXXPol

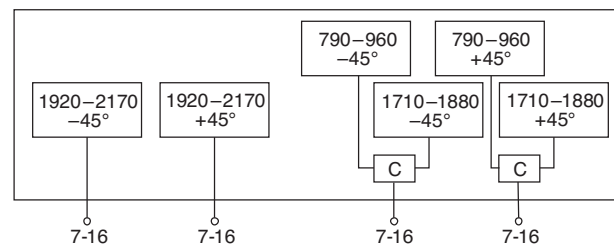

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2180 1710–2180

X X X


65° 65° 65°

KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2180/1710–2180 65°/65°/65° 17.5/17.5/17dBi 2°–10°/0°–10°/0°–10°T

Type No.	80010292v03						clamps included
	790–960			1710–2180			1710–2180
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain: (dBi)	17.0 ... 17.0 ... 16.8	17.2 ... 17.2 ... 16.9	17.4 ... 17.4 ... 17.0	17.1 ... 17.2 ... 16.6	17.2 ... 17.4 ... 16.8	17.2 ... 17.3 ... 16.7	
1710–2180 MHz (Syst. bottom)				16.5 ... 16.7 ... 16.2	16.6 ... 16.8 ... 16.3	16.8 ... 17.0 ... 16.3	
1710–2180 MHz (Syst. top)				0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	
Tilt	2° ... 6° ... 10°	2° ... 6° ... 10°	2° ... 6° ... 10°				
Horizontal Pattern:							
Half-power beam width	69°	68°	66°	65°	62°	61°	
Front-to-back ratio, copolar	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Maindirection	0°	25 dB	25 dB	25 dB	25 dB	25 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
	±60°	avg. 20 dB	avg. 20 dB	avg. 17 dB	avg. 16 dB	avg. 16 dB	
Tracking, Avg.	1.0 dB			1.0 dB			
1710–2180 MHz (Syst. bottom)				0.5 dB			
1710–2180 MHz (Syst. top)							
Squint	±3.5°			±3.5°			
Vertical Pattern:							
Half-power beam width	7.8°	7.6°	7.1°	7.6°	7.5°	6.8°	
Electrical tilt	2°–10°, continuously adjustable			0°–10°, continuously adjustable			
Sidelobe suppression for first	2° ... 6° ... 10° T	2° ... 6° ... 10° T	2° ... 6° ... 10° T	0° ... 5° ... 10° T	0° ... 5° ... 10° T	0° ... 5° ... 10° T	
sidelobe above main beam	17 ... 16 ... 14 dB	18 ... 16 ... 15 dB	18 ... 16 ... 15 dB	15 ... 16 ... 15 dB	16 ... 16 ... 15 dB	16 ... 16 ... 14 dB	
VSWR	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	
Isolation: Intersystem	> 36 dB (790–960 // 1710–2180 MHz) > 36 dB (1710–2180 // 1710–2180 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	250 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)			
Input	6 x 7-16 female						
Connector position	Bottom						
Adjustment mechanism	3x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1210 / 510 / 1270 N						
Height/width/depth	2598 / 261 / 146 mm						
Category of mounting hardware	H (Heavy)						
Weight	27 kg / 29 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

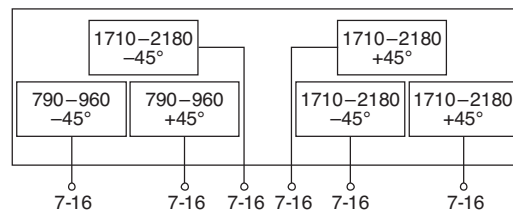

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2180 1710–2180

X X X


65° 65° 65°

KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2180/1710–2180 65°/65°/65° 17.5/17/17dBi 4°–12°/0°–14°/0°–14°T

Type No.	80010492v01						clamps included
	790–960			1710–2180		1710–2180	
Frequency range	790 – 866 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain: (dBi)	16.6 ... 16.5 ... 16.3	17.0 ... 16.9 ... 16.5	17.2 ... 17.0 ... 16.7	16.1 ... 16.3 ... 16.0	16.7 ... 16.8 ... 16.3	17.0 ... 17.0 ... 16.6	
1710–2180 MHz (Syst. bottom)				16.1 ... 16.1 ... 15.8	16.7 ... 16.5 ... 16.2	17.0 ... 16.9 ... 16.4	
1710–2180 MHz (Syst. top)							
Tilt	4° ... 8° ... 12°	4° ... 8° ... 12°	4° ... 8° ... 12°	0° ... 7° ... 14°	0° ... 7° ... 14°	0° ... 7° ... 14°	
Horizontal Pattern:							
Half-power beam width	68°	67°	66°	65°	63°	60°	
Front-to-back ratio (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Maindirection	23 dB	24 dB	25 dB	18 dB	18 dB	19 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:							
Half-power beam width	7.5°	7.4°	7.2°	7.8°	7.6°	7.2°	
Electrical tilt	4°–12°, continuously adjustable			0°–14°, continuously adjustable			
Sidelobe suppression	4° ... 8° ... 12° T	4° ... 8° ... 12° T	4° ... 8° ... 12° T	0° ... 7° ... 14° T	0° ... 7° ... 14° T	0° ... 7° ... 14° T	
– for firstsidelobe above main beam	19 ... 17 ... 16 dB	19 ... 18 ... 18 dB	19 ... 18 ... 18 dB	18 ... 17 ... 15 dB	18 ... 17 ... 15 dB	18 ... 17 ... 15 dB	
– within 0°–20° sector above horizon	15 ... 15 ... 14 dB	16 ... 15 ... 14 dB	16 ... 15 ... 14 dB	18 ... 17 ... 15 dB	17 ... 17 ... 15 dB	15 ... 14 ... 14 dB	
VSWR	< 1.5						
Isolation: Intrasystem	> 30 dB						
Isolation: Intersystem	> 36 dB (790–960 // 1710–2180 MHz) > 36 dB (1710–2180 // 1710–2180 MHz)						
Intermodulation IM3	< –153 dBc (2 x 43 dBm carrier)						
Max. power per input	400 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Input	6 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	3x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 870 / 520 / 1320 N						
Height/width/depth	2694 / 262 / 149 mm						
Category of mounting hardware	H (Heavy)						
Weight	34 kg / 36 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

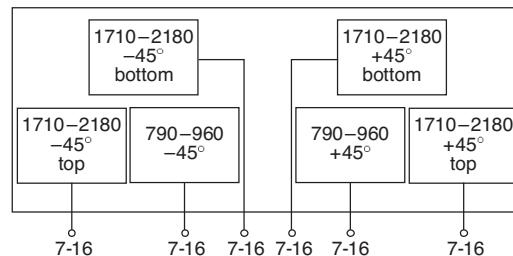

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2170 2490–2690

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2170/2490–2690 65°/65°/65° 15/17/16.5dBi 0°–16°/2°–10°/2°–10°T

Type No.	80010674							clamps included
	790–960			1710–2170			2490–2690	
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	14.5 ... 14.4 ... 14.2	14.6 ... 14.5 ... 14.3	14.8 ... 14.6 ... 14.4	17.0 ... 17.0 ... 16.6	17.2 ... 17.2 ... 16.8	17.2 ... 17.2 ... 16.7	16.3 ... 16.6 ... 15.8	
Tilt	0° ... 8° ... 16°	0° ... 8° ... 16°	0° ... 8° ... 16°	2° ... 5° ... 10°	2° ... 5° ... 10°	2° ... 5° ... 10°	2° ... 5° ... 10°	
Horizontal Pattern:								
Half-power beam width	69°	68°	67°	63°	63°	65°	65°	
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically: 25 dB	Typically: 25 dB	Typically: 23 dB	Typically: 18 dB	Typically: 21 dB	Typically: 23 dB	Typically: 23 dB	
Main direction	0°							
Sector	±60°	> 9 dB	> 8 dB	> 9 dB	> 9 dB	> 10 dB	> 8 dB	
Vertical Pattern:								
Half-power beam width	16.5°	16.0°	15°	6.2°	5.8°	5.7°	4.8°	
Electrical tilt, continuously adjust.	0°–16°			2°–10°			2°–10°	
Min. sidelobe suppression for first sidelobe above main beam	0° ... 8° ... 16° T 16 ... 15 ... 15 dB	0° ... 8° ... 16° T 16 ... 15 ... 15 dB	0° ... 8° ... 16° T 15 ... 15 ... 15 dB	2° ... 5° ... 10° T 14 ... 14 ... 15 dB	2° ... 5° ... 10° T 14 ... 15 ... 16 dB	2° ... 5° ... 10° T 14 ... 16 ... 17 dB	2° ... 5° ... 10° T 14 ... 16 ... 17 dB	
VSWR	< 1.5			< 1.5			< 1.5	
Isolation: Intrasystem	> 30 dB			> 28 dB			> 30 dB	
Isolation: Intersystem	> 30 dB (790–960 // 1710–2170 // 2490–2690MHz)							
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)							
Max. power per input	500 W*			200 W*			200 W*	
Total power	1000 W*			400 W*			400 W*	
Input	6 x 7-16 female (long neck)							
Connector position	Bottom							
Adjustment mechanism	3x, Position bottom continuously adjustable							
Wind load (at 150 km/h)	Frontal / lateral / rearside: 700 / 270 / 730 N							
Height/width/depth	1403 / 300 / 152 mm							
Category of mounting hardware	M (Medium)							
Weight	20 kg / 22 kg (clamps incl.)							
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter							

* (at 50 °C ambient temperature)

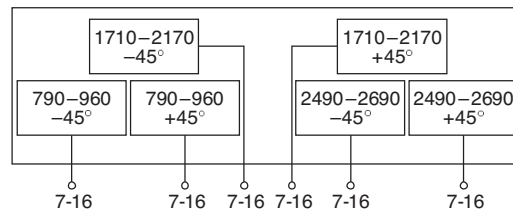

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2170 2490–2690

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2170/2490–2690 65°/65°/65° 16/18/18dBi 0°–10°/0°–6°/0°–6°T

Type No.	80010675							clamps included
	790–960			1710–2170			2490–2690	
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.0 ... 16.0 ... 15.5	16.1 ... 16.1 ... 15.6	16.0 ... 16.2 ... 15.6	18.0 ... 18.0 ... 17.6	18.0 ... 18.0 ... 17.5	18.1 ... 18.1 ... 17.4	17.8 ... 17.8 ... 17.6	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:								
Half-power beam width	68°	67°	65°	62°	63°	62°	63°	
Front-to-back ratio, copolar (180°±30°)	> 27 dB	> 27 dB	> 27 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Main direction 0°	22 dB	22 dB	22 dB	18 dB	22 dB	23 dB	25 dB	
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:								
Half-power beam width	10.3°	10.1°	9.8°	4.8°	4.6°	4.4°	3.5°	
Electrical tilt, continuously adjust.	0°–10°			0°–6°			0°–6°	
Min. sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T 18 ... 17 ... 15 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 18 ... 16 ... 16 dB	0° ... 3° ... 6° T 18 ... 18 ... 17 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 18 ... 18 dB	
VSWR	< 1.5			< 1.5			< 1.5	
Isolation: Intrasystem	> 30 dB			> 28 dB			> 28 dB	
Isolation: Intersystem	> 30 dB (790–960 // 1710–2170 // 2490–2690MHz)							
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)							
Max. power per input	500 W*			200 W*			200 W*	
Total power	1000 W*			400 W*			400 W*	
Input	6 x 7-16 female (long neck)							
Connector position	Bottom							
Adjustment mechanism	3x, Position bottom continuously adjustable							
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1020 / 390 / 1050 N							
Height/width/depth	1997 / 300 / 152 mm							
Category of mounting hardware	M (Medium)							
Weight	26 kg / 28 kg (clamps incl.)							
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter							

* (at 50 °C ambient temperature)

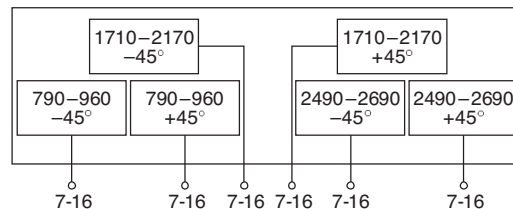

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–2170 2490–2690

X X X

65° 65° 65°


KATHREIN

Antennen · Electronic

XXXPol Panel 790–960/1710–2170/2490–2690 65°/65°/65° 17/18/18dBi 0°–10°/0°–6°/0°–6°T

Type No.	80010676							clamps included
	790–960			1710–2170		2490–2690		
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.8 ... 16.7 ... 16.5	17.0 ... 17.0 ... 16.8	17.1 ... 17.2 ... 17.0	18.0 ... 18.0 ... 17.6	18.0 ... 18.0 ... 17.5	18.1 ... 18.1 ... 17.4	17.8 ... 17.8 ... 17.6	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:								
Half-power beam width	68°	67°	65°	62°	63°	62°	63°	
Front-to-back ratio, copolar (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically: 24 dB	Typically: 23 dB	Typically: 22 dB	Typically: 18 dB	Typically: 22 dB	Typically: 23 dB	Typically: 25 dB	
Main direction 0°								
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:								
Half-power beam width	7.5°	7.4°	7.1°	4.8°	4.6°	4.4°	3.5°	
Electrical tilt, continuously adjust.	0.5°–9.5°			0°–6°			0°–6°	
Min. sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB	0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB	0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 18 ... 16 ... 16 dB	0° ... 3° ... 6° T 18 ... 18 ... 17 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 18 ... 18 dB	
VSWR	< 1.5							
Isolation: Intrasystem	> 30 dB			> 28 dB				
Isolation: Intersystem	> 30 dB (790–960 // 1710–2170 // 2490–2690MHz)							
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)							
Max. power per input	500 W*			200 W*			200 W*	
Total power	1000 W*			400 W*			400 W*	
Input	6 x 7-16 female (long neck)							
Connector position	Bottom							
Adjustment mechanism	3x, Position bottom continuously adjustable							
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1380 / 520 / 1490 N							
Height/width/depth	2622 / 300 / 152 mm							
Category of mounting hardware	H (Heavy)							
Weight	31 kg / 33 kg (clamps incl.)							
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter							

* (at 50 °C ambient temperature)

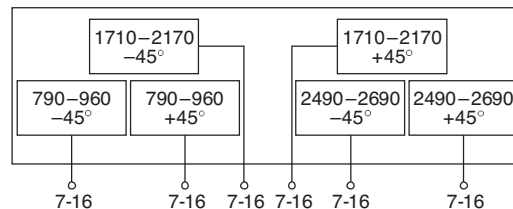

Triple-band Panel

Dual Polarization

Half-power Beam Width

790–960

1710–2690

1710–2690

KATHREIN

X

X

X

Antennen · Electronic


65°

65°

65°

XXXPol Panel 790–960/1710–2690/1710–2690 65°/65°/65° 16/16/16dBi 0°–10°/2°–12°/2°–12°T

Type No.	80010691							clamps included	
	790–960			1710–2690		1710–2690			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz		
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°		
Average gain: (dBi)	16.0 ... 16.0 ... 15.5	16.1 ... 16.1 ... 15.6	16.0 ... 16.2 ... 15.6	15.5 ... 15.4 ... 15.2	15.6 ... 15.5 ... 15.2	16.0 ... 15.9 ... 15.2	16.0 ... 16.1 ... 15.9		
1710–2690 MHz (Syst. bottom)				15.3 ... 15.2 ... 14.9	15.4 ... 15.2 ... 14.9	15.9 ... 15.7 ... 15.0	15.7 ... 15.8 ... 15.4		
1710–2690 MHz (Syst. top)				2° ... 7° ... 12°	2° ... 7° ... 12°	2° ... 7° ... 12°	2° ... 7° ... 12°		
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°						
Horizontal Pattern:									
Half-power beam width	68°	67°	65°	63°	62°	63°	62°		
Front-to-back ratio, copolar (180°±30°)	> 27 dB	> 27 dB	> 27 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB		
Cross polar ratio	Typically: 22 dB	Typically: 22 dB	Typically: 22 dB	Typically: 18 dB	Typically: 22 dB	Typically: 24 dB	Typically: 20 dB		
Maindirection 0°									
Sector ±60°	> 10 dB	> 10 dB	> 10 dB	> 8 dB	> 9 dB	> 8 dB	> 8 dB		
Vertical Pattern:									
Half-power beam width	10.3°	10.1°	9.8°	11°	10°	9.2°	7.8°		
Electrical tilt	0°–10°, continuously adjustable			2°–12°, continuously adjustable					
Min. sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° T 18 ... 17 ... 15 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB	0° ... 5° ... 10° T 18 ... 18 ... 16 dB	2° ... 7° ... 12° T 17 ... 18 ... 17 dB	2° ... 7° ... 12° T 17 ... 16 ... 15 dB	2° ... 7° ... 12° T 17 ... 16 ... 15 dB	2° ... 7° ... 12° T 17 ... 16 ... 15 dB		
VSWR < 1.5									
Isolation: Intrasystem	> 30 dB			> 28 dB					
Isolation: Intersystem	> 30 dB (790–960 // 1710–2690 MHz) > 30 dB (1710–2690 // 1710–2690MHz)								
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)								
Max. power per input	500 W (at 50 °C ambient temperature)			200 W (at 50 °C ambient temperature)					
Total power	1000 W (at 50 °C ambient temperature)			400 W (at 50 °C ambient temperature)					
Input	6 x 7-16 female (long neck)								
Connector position	Bottom								
Adjustment mechanism	3x, Position bottom continuously adjustable								
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1020 / 390 / 1050 N								
Height/width/depth	1997 / 300 / 152 mm								
Category of mounting hardware	M (Medium)								
Weight	26 kg / 28 kg (clamps incl.)								
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter								

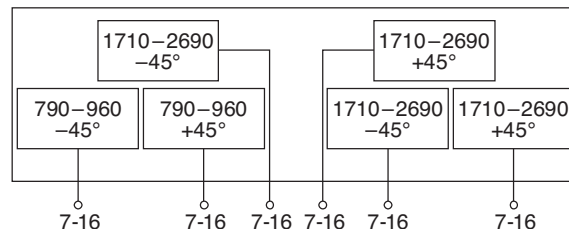

Summary – Directional Antennas

Quad-band

800/900 – 1800/2000/2600

Dual Polarization +45°/–45°

Type	Type No.	Height [mm]	Connector position	Page
XXXXPol Panel	790–960 65° 16dBi 0°–10°T 790–960 65° 16dBi 0°–10°T 1710–2180 65° 18.5dBi 0°–6°T 1710–2180 65° 18.5dBi 0°–6°T	1934	bottom	146
XXXXPol Panel	790–960 65° 17dBi 0°–10°T 790–960 65° 17dBi 0°–10°T 1710–2180 65° 18.5dBi 0°–6°T 1710–2180 65° 18.5dBi 0°–6°T	2399	bottom	147
XXXXPol Panel	790–862 65° 16dBi 0°–10°T 880–960 65° 16dBi 0°–10°T 1710–2170 65° 18dBi 2°–8°T 2490–2690 65° 18dBi 2°–8°T	1997	bottom	148
XXXXPol Panel	790–960 65° 16dBi 0°–10°T 1710–1880 65° 18dBi 0°–6°T 1920–2170 65° 18dBi 0°–6°T 2490–2690 65° 18dBi 0°–6°T	1997	bottom	149
XXXXPol Panel	790–960 65° 17dBi 0°–10°T 1710–1880 65° 18dBi 0°–6°T 1920–2170 65° 18dBi 0°–6°T 2490–2690 65° 18dBi 0°–6°T	2622	bottom	150

New or changed product

When deploying
Quad-band Antennas,
please also consider using
special Quad-band Combiners
(see page 241)

2-Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960

790–960

1710–2180

1710–2180

KATHREIN

X

X

X

X

Antennen · Electronic

65°


65°

60°

60°

XXXXPol Panel 790–960/790–960/1710–2180/1710–2180 65°/65°/60°/60° 16/16/18.5/18.5dBi 0°–10°/0°–10°/0°–6°/0°–6°T

Type No.	80010825						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	15.4 ... 15.7 ... 15.3	15.6 ... 16.0 ... 15.4	15.9 ... 16.1 ... 15.4	18.4 ... 18.5 ... 18.1	18.5 ... 18.7 ... 18.1	18.3 ... 18.5 ... 18.1	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	67°	65°	63°	60°	60°	60°	
Front-to-back ratio, copolar	> 27 dB	> 27 dB	> 28 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Maindirection	0° 25 dB	25 dB	25 dB	25 dB	25 dB	25 dB	
Sector	±60° > 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB			0.5 dB			
Squint	±3.0°			±2.5°			
Vertical Pattern:							
Half-power beam width	11°	10.7°	10°	5.0°	4.8°	4.6°	
Electrical tilt	0°–10°, continuously adjustable			0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0° ... 5° ... 10° T ≥ 17 ... 17 ... 17 dB	0° ... 5° ... 10° T ≥ 17 ... 17 ... 18 dB	0° ... 5° ... 10° T ≥ 17 ... 17 ... 16 dB	0° ... 3° ... 6° T ≥ 16 ... 15 ... 14 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	
VSWR	< 1.5			< 1.5			
Isolation: Intrasystem	> 30 dB			> 30 dB			
Isolation: Intersystem				> 30 dB (790–960 // 790–960 MHz) > 30 dB (790–960 // 1710–2180 MHz) > 30 dB (1710–2180 // 1710–2180 MHz)			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	8 x 7-16 female						
Connector position	Bottom						
Adjustment mechanism	4x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1540 / 330 / 1790 N						
Height/width/depth	1934 / 576 / 133 mm						
Category of mounting hardware	H (Heavy)						
Weight	36 kg / 38 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

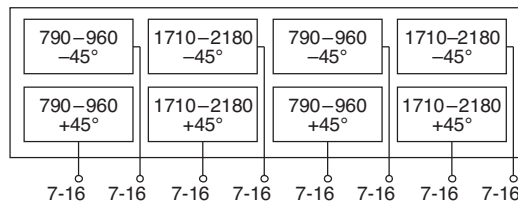

2-Dual-band Panel

Dual Polarization

Half-power Beam Width

790–960 790–960 1710–2180 1710–2180

X X X X


65° 65° 60° 60°

KATHREIN

Antennen · Electronic

XXXXPol Panel 790–960/790–960/1710–2180/1710–2180 65°/65°/60°/60° 17/17/18.5/18.5dBi 0°–7°/0°–7°/0°–6°/0°–6°T

Type No.	80010826						clamps included
	790–960			1710–2180			
Frequency range	790 – 862 MHz	824 – 894 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2180 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Gain (dBi)	16.3 ... 16.5 ... 16.2	16.6 ... 16.8 ... 16.3	16.6 ... 17.0 ... 16.4	18.5 ... 18.5 ... 18.1	18.5 ... 18.5 ... 18.1	18.4 ... 18.5 ... 18.1	
Tilt	0° ... 3° ... 7°	0° ... 3° ... 7°	0° ... 3° ... 7°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	67°	65°	63°	60°	60°	60°	
Front-to-back ratio, copolar	> 27 dB	> 27 dB	> 28 dB	> 30 dB	> 30 dB	> 30 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Maindirection	25 dB	25 dB	25 dB	25 dB	25 dB	25 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Tracking, Avg.	1.5 dB			0.5 dB			
Squint	±3.0°			±2.5°			
Vertical Pattern:							
Half-power beam width	7.7°	7.5°	7.2°	5.0°	4.8°	4.6°	
Electrical tilt	0°–7°, continuously adjustable			0°–6°, continuously adjustable			
Sidelobe supression for first sidelobe above main beam avg.	0° ... 3° ... 7° T ≥ 16 ... 17 ... 16 dB	0° ... 3° ... 7° T ≥ 15 ... 17 ... 18 dB	0° ... 3° ... 7° T ≥ 15 ... 17 ... 18 dB	0° ... 3° ... 6° T ≥ 16 ... 15 ... 14 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	0° ... 3° ... 6° T ≥ 17 ... 16 ... 15 dB	
VSWR	< 1.5			< 1.5			
Isolation: Intrasystem	> 30 dB			> 30 dB			
Isolation: Intersystem				> 30 dB (790–960 // 790–960 MHz) > 30 dB (790–960 // 1710–2180 MHz) > 30 dB (1710–2180 // 1710–2180 MHz)			
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)			< –150 dBc (2 x 43 dBm carrier)			
Max. power per input	500 W (at 50 °C ambient temperature)			250 W (at 50 °C ambient temperature)			
Total power	1000 W (at 50 °C ambient temperature)			500 W (at 50 °C ambient temperature)			
Input	8 x 7-16 female						
Connector position	Bottom						
Adjustment mechanism	4x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1930 / 410 / 2200 N						
Height/width/depth	2399 / 576 / 133 mm						
Category of mounting hardware	H (Heavy)						
Weight	44 kg / 46 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

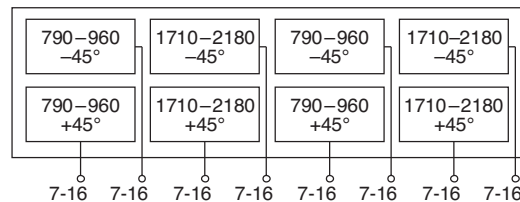

800/900 –
1800/2000/2600
XXXXPol

Quad-band Panel

Dual Polarization

Half-power Beam Width

790–862 880–960 1710–2170 2490–2690

X X X X

65° 65° 65° 65°


KATHREIN

Antennen · Electronic

XXXXPol Panel 790–862/880–960/1710–2170/2490–2690 65°/65°/65°/65° 16/16/18/18dBi 0°–10°/0°–10°/2°–8°/2°–8°T

Type No.	80010805						clamps included
	790–862	880–960	1710–2170	1710–2170	2490–2690	2490–2690	
Frequency range	790 – 862 MHz	880 – 960 MHz	1710 – 1880 MHz	1850 – 1990 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	15.8 ... 15.8 ... 15.4	15.7 ... 15.9 ... 15.3	18.0 ... 18.0 ... 17.6	18.0 ... 18.0 ... 17.5	18.1 ... 18.1 ... 17.4	17.8 ... 17.8 ... 17.6	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	2° ... 4° ... 8°	2° ... 4° ... 8°	2° ... 4° ... 8°	2° ... 4° ... 8°	
Horizontal Pattern:							
Half-power beam width	68°	65°	62°	63°	62°	63°	
Front-to-back ratio, copolar (180°±30°)	> 27 dB	> 27 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically: 22 dB	Typically: 22 dB	Typically: 18 dB	Typically: 22 dB	Typically: 23 dB	Typically: 25 dB	
Main direction	0°	0°	0°	0°	0°	0°	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:							
Half-power beam width	10.3°	9.8°	4.8°	4.6°	4.4°	3.5°	
Electrical tilt, continuously adjust.	0°–10°	0°–10°	2°–8°	2°–8°	2°–8°	2°–8°	
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° 18 ... 17 ... 15 dB	0° ... 5° ... 10° 18 ... 18 ... 16 dB	2° ... 4° ... 8° 18 ... 16 ... 16 dB	2° ... 4° ... 8° T 18 ... 18 ... 17 dB	2° ... 4° ... 8° T 18 ... 17 ... 17 dB	2° ... 4° ... 8° T 18 ... 18 ... 18 dB	
VSWR	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB	> 30 dB	> 28 dB	> 28 dB	> 28 dB	> 28 dB	
Isolation: Intersystem	> 30 dB (790–862 // 880–960 // 1710–2170 // 2490–2690 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	250 W*	250 W*	200 W*	200 W*	200 W*	200 W*	
Total power	500 W*	500 W*	400 W*	400 W*	400 W*	400 W*	
Input	8 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	4x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1020 / 390 / 1050 N						
Height/width/depth	1997 / 300 / 152 mm						
Category of mounting hardware	M (Medium)						
Weight	29 kg / 31 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

*(at 50 °C ambient temperature)

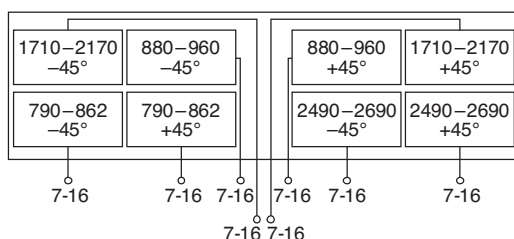

Quad-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170 2490–2690

X X X X

65° 65° 65° 65°


KATHREIN

Antennen · Electronic

XXXXPol Panel 790–960/1710–1880/1920–2170/2490–2690 65°/65°/65°/65° 16/18/18/18dBi 0°–10°/0°–6°/0°–6°/0°–6°T

Type No.	80010685						clamps included
		790–960		1710–1880	1920–2170	2490–2690	
Frequency range	790 – 862 MHz	824 – 896 MHz	880 – 960 MHz	1710 – 1880 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.0 ... 16.0 ... 15.5	16.1 ... 16.1 ... 15.6	16.0 ... 16.2 ... 15.6	17.8 ... 17.8 ... 17.5	17.8 ... 17.8 ... 17.4	17.8 ... 17.8 ... 17.6	
Tilt	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 5° ... 10°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	62°	62°	63°	
Front-to-back ratio, copalar (180°±30°)	> 27 dB	> 27 dB	> 27 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:			Typically:	
Maindirection	22 dB	22 dB	22 dB	18 dB	23 dB	25 dB	
Sector	±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:							
Half-power beam width	10.3°	10.1°	9.8°	4.8°	4.4°	3.5°	
Electrical tilt, continuously adjust.	0°–10°			0°–6°	0°–6°	0°–6°	
Sidelobe suppression for first sidelobe above main beam	0° ... 5° ... 10° 18 ... 17 ... 15 dB	0° ... 5° ... 10° 18 ... 18 ... 16 dB	0° ... 5° ... 10° 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 18 ... 16 ... 16 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 18 ... 18 dB	
VSWR	< 1.5			< 1.5	< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB			> 28 dB	> 28 dB	> 28 dB	
Isolation: Intersystem	> 30 dB (1710–1880 // 1920–2170 MHz) > 35 dB (790–960 // 1710–2170 MHz) > 38 dB (2490–2690 // 790–960 ... 1710–2170 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	500 W*			200 W*	200 W*	200 W*	
Total power	1000 W*			400 W*			
Input	8 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	4x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1020 / 390 / 1050 N						
Height/width/depth	1997 / 300 / 152 mm						
Category of mounting hardware	M (Medium)						
Weight	29 kg / 31 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 50 – 115 mm diameter						

* (at 50 °C ambient temperature)

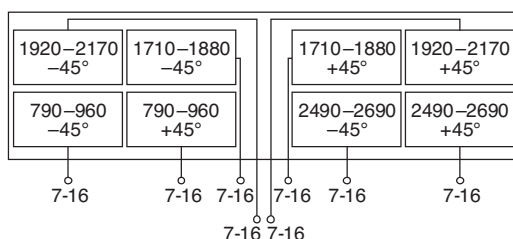

800/900 –
1800/2000/2600
XXXXPol

Quad-band Panel

Dual Polarization

Half-power Beam Width

790–960 1710–1880 1920–2170 2490–2690

X X X X

65° 65° 65° 65°


KATHREIN

Antennen · Electronic

XXXXPol Panel 790–960/1710–1880/1920–2170/2490–2690 65°/65°/65°/65° 17/18/18/18dBi 0°–10°/0°–6°/0°–6°/0°–6°T

Type No.	80010686						clamps included
		790–960		1710–1880	1920–2170	2490–2690	
Frequency range	790 – 862 MHz	824 – 896 MHz	880 – 960 MHz	1710 – 1880 MHz	1920 – 2170 MHz	2490 – 2690 MHz	
Polarization	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	+45°, –45°	
Average gain (dBi)	16.8 ... 16.7 ... 16.5	17.0 ... 17.0 ... 16.8	17.1 ... 17.2 ... 17.0	17.8 ... 17.8 ... 17.5	17.8 ... 17.8 ... 17.4	17.8 ... 17.8 ... 17.6	
Tilt	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0.5° ... 5° ... 9.5°	0° ... 3° ... 6°	0° ... 3° ... 6°	0° ... 3° ... 6°	
Horizontal Pattern:							
Half-power beam width	68°	67°	65°	62°	62°	63°	
Front-to-back ratio, copalar (180°±30°)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	
Cross polar ratio	Typically:	Typically:	Typically:	Typically:	Typically:	Typically:	
Maindirection	24 dB	23 dB	22 dB	18 dB	23 dB	25 dB	
Sector	0° ±60°	> 10 dB	> 10 dB	> 10 dB	> 10 dB	> 10 dB	
Vertical Pattern:							
Half-power beam width	7.5°	7.4°	7.1°	4.8°	4.4°	3.5°	
Electrical tilt, continuously adjust.	0.5°–9.5°			0°–6°	0°–6°	0°–6°	
Sidelobe suppression for first sidelobe above main beam	0.5° ... 5° ... 9.5° T 18 ... 16 ... 14 dB	0.5° ... 5° ... 9.5° T 18 ... 17 ... 15 dB	0.5° ... 5° ... 9.5° T 18 ... 18 ... 16 dB	0° ... 3° ... 6° T 18 ... 16 ... 16 dB	0° ... 3° ... 6° T 18 ... 17 ... 17 dB	0° ... 3° ... 6° T 18 ... 18 ... 18 dB	
VSWR	< 1.5			< 1.5	< 1.5	< 1.5	
Isolation: Intrasystem	> 30 dB			> 28 dB	> 28 dB	> 28 dB	
Isolation: Intersystem	> 30 dB (1710–1880 // 1920–2170 MHz) > 35 dB (790–960 // 1710–2170 MHz) > 38 dB (2490–2690 // 790–960 ... 1710–2170 MHz)						
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)						
Max. power per input	500 W*			200 W*	200 W*	200 W*	
Total power	1000 W*			400 W*			
Input	8 x 7-16 female (long neck)						
Connector position	Bottom						
Adjustment mechanism	4x, Position bottom continuously adjustable						
Wind load (at 150 km/h)	Frontal / lateral / rearside: 1380 / 520 / 1490 N						
Height/width/depth	2622 / 300 / 152 mm						
Category of mounting hardware	H (Heavy)						
Weight	34 kg / 36 kg (clamps incl.)						
Scope of supply	Panel and 2 units of clamps for 42 – 115 mm diameter						

* (at 50 °C ambient temperature)

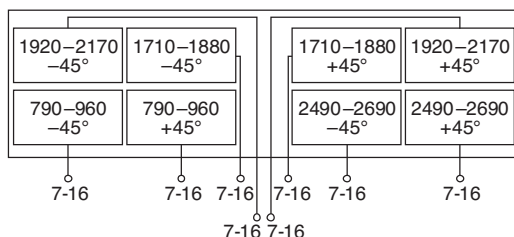

Vertical Polarization – 800/900

Type	Type No.	Connector female	Height [mm]	Remarks	Page
VPol Omni	870–960 360° 2dBi 0°T	738450	N	180	indoor/outdoor 152
VPol Omni	806–960 360° 2dBi 0°T	K751161	N	348	153
VPol Omni	890–960 360° 5dBi 0°T	K7515641	N	715	154
VPol Omni	870–960 360° 8dBi 0°T	736350	7-16	1543	155
VPol Omni	790–862 360° 11dBi 0°T	80010850	7-16	3237	156
VPol Omni	860–894 360° 11dBi 0°T	738192	7-16	3237	157
VPol Omni	870–960 360° 11dBi 0°T	736347	7-16	3033	158
VPol Omni	870–960 360° 10.5dBi 5°T	736349	7-16	2954	159

Vertical Polarization – Dual band

VVPol Omni	790–862 360° 8dBi 0°T	80010747	7-16	3237	separate inputs	160
	870–960 360° 9dBi 0°T					
VPol Omni	890–960/1710–1880 360° 2dBi 0°T	738449	N	216	indoor/outdoor	176
VPol Omni	824–960/1805–2170 360° 2dBi 0°T	80010147	N	216	indoor/outdoor	178
VVPol Omni	870–960 360° 9dBi 0°T	80010274	7-16	3033	separate inputs	161
	1920–2170 360° 10dBi 0°T					
VVPol Omni	870–960/1710–1880 360° 2dBi 0°T	80010111	N	493	separate inputs	162
	1920–2170 360° 2dBi 0°T					

Vertical Polarization – 1800

VPol Omni	1710–1880 360° 11dBi 0°T	738187	7-16	1568		163
-----------	--------------------------	--------	------	------	--	-----

Vertical Polarization – 1800/2000/2500/3500

VPol Omni	1710–2700 360° 2dBi 0°T	80010431	N	115		177
VPol Omni	1920–2170 360° 11dBi 0°T	741790	7-16	1387		164
VPol Omni	2500–2700 360° 11dBi 0°T	80010442	7-16	1132		165

New or changed product

Omnidirectional Antenna Vertical Polarization

870–960

V

VPol Omni 870–960 360° 2dBi



Type No.	738450
Input	N female
Connector position	Bottom or top
Frequency range	870 – 960 MHz
VSWR	< 1.5
Gain	2 dBi
Impedance	50 Ω
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Polarization	Vertical
Max. power	100 W (at 50 °C ambient temperature)
Weight	200 g
Radome diameter	20 mm
Height	180 mm

- Material:

Radiator: Brass.
Radome: Fiberglass, colour: White.
- Mounting:

One hole mounting (16 mm diameter) to surfaces
of max. 10 mm thickness.
- Grounding:

All metal parts of the antenna as well as the inner
conductor and the mounting kit are DC grounded.

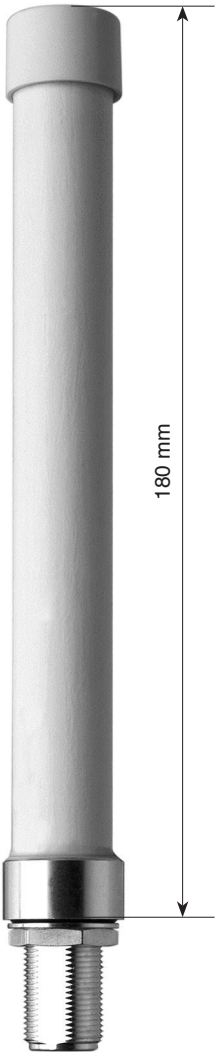

Omnidirectional Antenna Vertical Polarization



806–960
V

KATHREIN
Antennen · Electronic


VPol Omni 806–960 360° 2dBi

Type No.	K751161
Frequency range	806 – 960 MHz
Polarization	Vertical
Gain	2 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	100 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached in two ways with the supplied mounting kit:
1. On the tip of a tubular mast of 40 – 54 mm diameter (connecting cable runs inside the mast).
 2. Laterally at the tip of a tubular mast of 20 – 54 mm diameter (connecting cable runs outside the mast).
- Material:** Radiator: Brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Grounding:** All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.

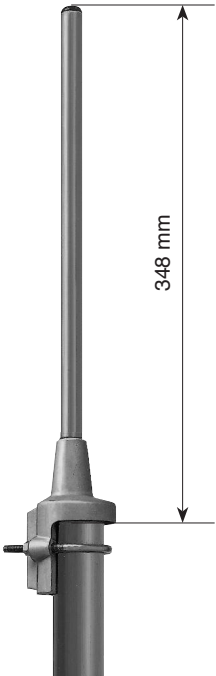

Vertical Pattern

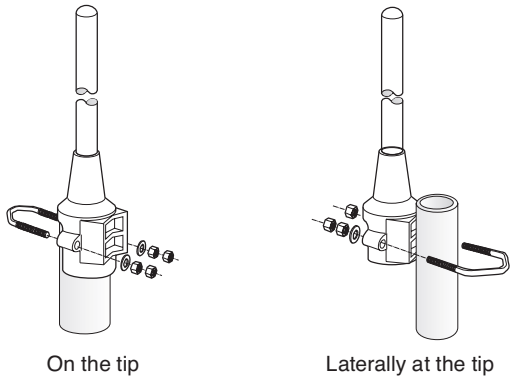

Mechanical specifications	
Input	N female
Connector position	Bottom
Weight	0.74 kg
Radome diameter	21 mm
Wind load	17 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	455 x 112 x 97 mm
Height	348 mm

Omnidirectional Antenna
Vertical Polarization



890–960
V

KATHREIN
Antennen · Electronic


VPol Omni 890–960 360° 5dBi

Type No.	K7515641
Frequency range	890 – 960 MHz
Polarization	Vertical
Gain	5 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	250 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached in two ways with the supplied mounting kit:
- 1. On the tip of a tubular mast of 40 – 54 mm diameter (connecting cable runs inside the mast).
 - 2. Laterally at the tip of a tubular mast of 20 – 54 mm diameter (connecting cable runs outside the mast).
- Material:** Radiator: Brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Grounding:** All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.

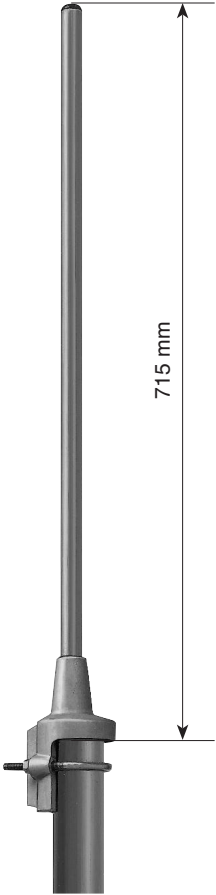

Vertical Pattern

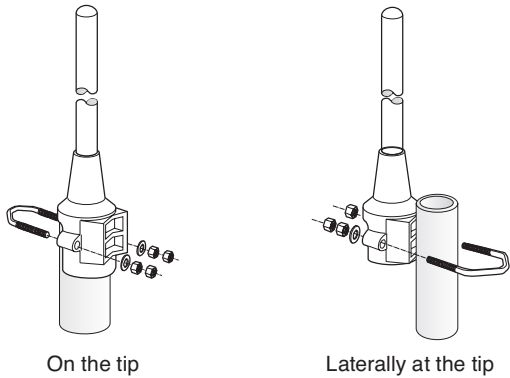

Mechanical specifications	
Input	N female
Connector position	Bottom
Weight	0.90 kg
Radome diameter	21 mm
Wind load	20 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	825 x 112 x 97 mm
Height	715 mm

Omnidirectional Antenna Vertical Polarization

870–960



V

KATHREIN
Antennen · Electronic


VPol Omni 870–960 360° 8dBi

Type No.	736350
Frequency range	870 – 960 MHz
Polarization	Vertical
Gain	8 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	500 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

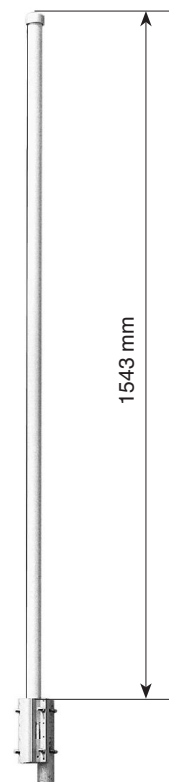

Vertical Pattern

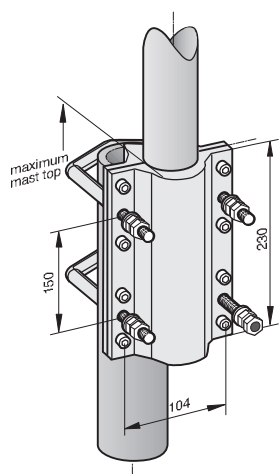

Mechanical specifications

Input	7-16 female
Connector position	Bottom
Weight	5.5 kg
Radome diameter	51 mm
Wind load	130 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	1846 x 148 x 112 mm
Height	1543 mm

Omnidirectional Antenna **Vertical Polarization**

790–862
V

VPol Omni 790–894 360° 11dBi

Type No.	80010850
Frequency range	790 – 862 MHz
Polarization	Vertical
Gain	11 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	500 W (at 50 °C ambient temperature)

- Mounting:

Material:

Anti-static protection:



Lightning protection:

The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).


Radiator: Copper and brass.
 Radome: Fiberglass, color: Grey.
 Base: Weather-proof aluminum.
 Mounting kit, screws and nuts: Stainless steel.

All metal parts of the antenna as well as the supplied clamp attachment are grounded.
 The inner conductor is capacitively coupled.

The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

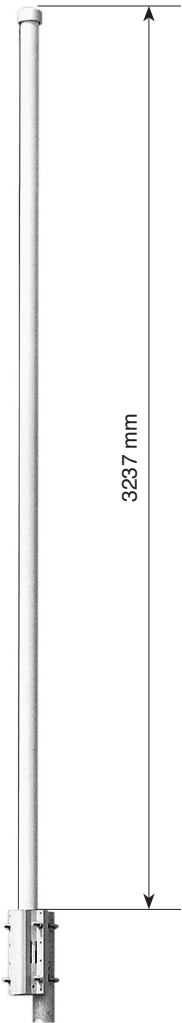

Vertical Pattern

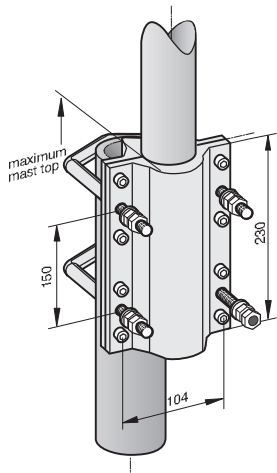

Mechanical specifications	
Input	7-16 female
Connector position	Bottom
Weight	8.5 kg
Radome diameter	51 mm
Wind load	230 N (at 150 km/h)
Max. wind velocity	180 km/h
Packing size	3516 x 148 x 112 mm
Height	3237 mm

Omnidirectional Antenna Vertical Polarization

806–894



V

KATHREIN
Antennen · Electronic


VPol Omni 806–894 360° 11dBi

Type No.	738192
Frequency range	806 – 894 MHz
Polarization	Vertical
Gain	11 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	500 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

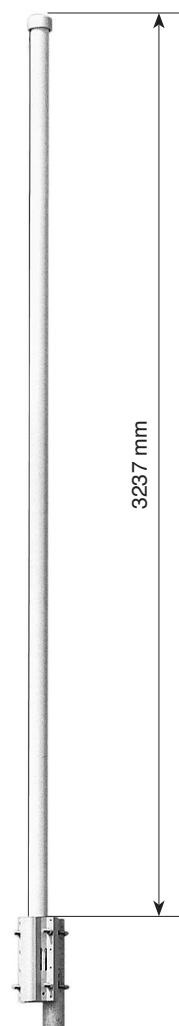

Vertical Pattern

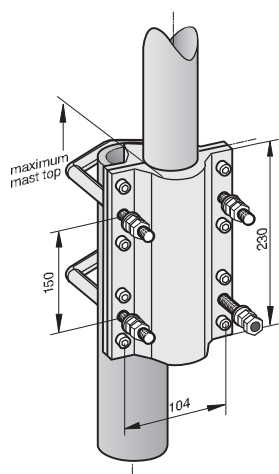

Mechanical specifications

Input	7-16 female
Connector position	Bottom
Weight	8.5 kg
Radome diameter	51 mm
Wind load	230 N (at 150 km/h)
Max. wind velocity	180 km/h
Packing size	3516 x 148 x 112 mm
Height	3237 mm

Omnidirectional Antenna Vertical Polarization



870–960
V

KATHREIN
Antennen · Electronic


VPol Omni 870–960 360° 11dBi

Type No.	736347
Frequency range	870 – 960 MHz
Polarization	Vertical
Gain	11 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	500 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

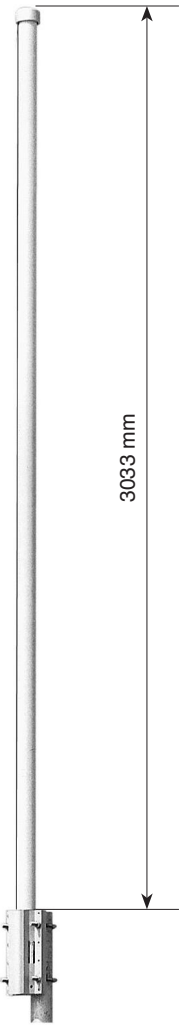

Vertical Pattern

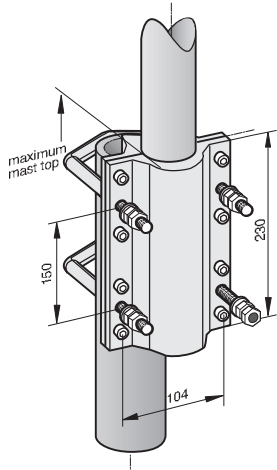

Mechanical specifications	
Input	7-16 female
Connector position	Bottom
Weight	8 kg
Radome diameter	51 mm
Wind load	210 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	3316 x 148 x 112 mm
Height	3033 mm

Omnidirectional Antenna **Vertical Polarization** **Fixed Electrical Downtilt**

870–960
V
5°

VPol Omni 870–960 360° 10.5dBi 5°T

Type No.	736349
Frequency range	870 – 960 MHz
Polarization	Vertical
Gain	10.5 dBi
Electrical tilt	5°, fixed
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	500 W (at 50 °C ambient temperature)



- Mounting:

The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:


Radiator: Copper and brass.
 Radome: Fiberglass, color: Grey.
 Base: Weather-proof aluminum.
 Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:

All metal parts of the antenna as well as the supplied clamp attachment are grounded.
 The inner conductor is capacitively coupled.
- Lightning protection:

The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

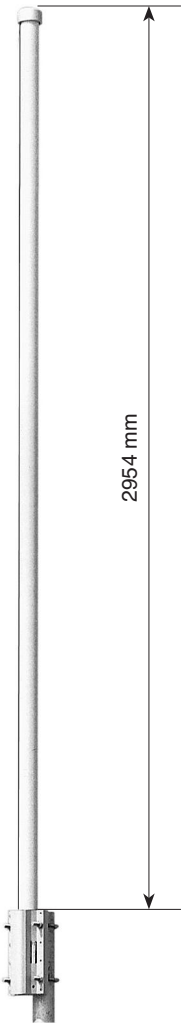

Vertical Pattern
5° electrical downtilt

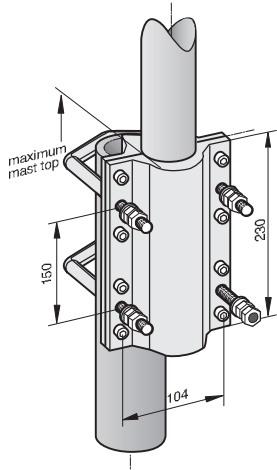

Mechanical specifications	
Input	7-16 female
Connector position	Bottom
Weight	8 kg
Radome diameter	51 mm
Wind load	210 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	3316 x 148 x 112 mm
Height	2954 mm

Dual-band Omni Antenna Vertical Polarization

870–960

790–862

V

V

KATHREIN
Antennen · Electronic

VPol Omni 870–960/790–862 360°/360° 9/8dBi



Type No.	80010747	
Frequency range	Top system: 870 – 960 MHz	Bottom system: 790 – 862 MHz
Polarization	Vertical	Vertical
Gain	9 dBi	8 dBi
Half-power beam width	Horizontal: Omni Vertical: 11°	Horizontal: Omni Vertical: 16°
Isolation, between ports	> 30 dB	
Impedance	50 Ω	
VSWR	< 1.5	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	150 W	100 W (at 50 °C ambient temperature)

Mounting: The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).


Material: Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.

Anti-static protection: All metal parts of the antenna as well as the supplied clamp attachment are grounded. The inner conductors of both systems are coupled capacitively.




Lightning protection: The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

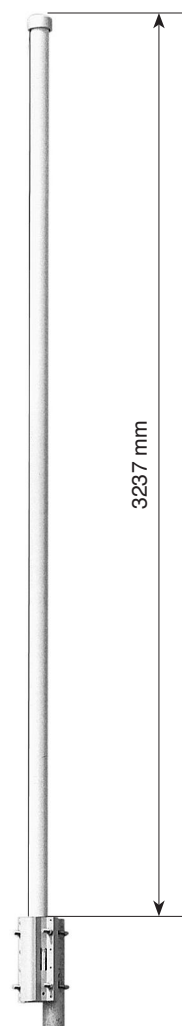


Vertical Pattern



Vertical Pattern

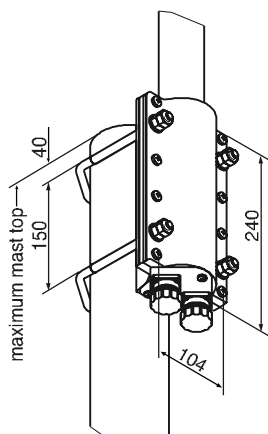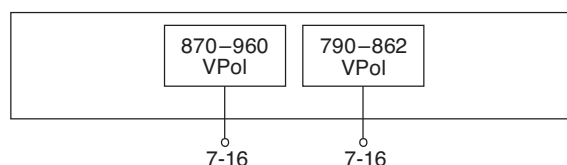

Bottom view



Layout of interface

Mechanical specifications

Input	2 x 7-16 female
Connector position	Bottom
Weight	8 kg
Wind load	230 N (at 150 km/h)
Max. wind velocity	180 km/h
Packing size	3516 x 148 x 112 mm
Height	3237 mm
Radome diameter	51 mm

Dual-band Omni Antenna
Vertical Polarization

870–960	1920–2170
V	V

KATHREIN
Antennen · Electronic

VPol Omni 870–960/1920–2170 360°/360° 9/10dBi







Type No.	80010274	
Frequency range	Top system: 870 – 960 MHz	Bottom system: 1920 – 2170 MHz
Polarization	Vertical	Vertical
Gain	9 dBi	10 dBi
Half-power beam width	Horizontal: Omni Vertical: 11°	Horizontal: Omni Vertical: 9°
Isolation, between ports	> 30 dB	
Impedance	50 Ω	
VSWR	< 1.5	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	150 W	100 W (at 50 °C ambient temperature)

Mounting: The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).

Material: Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.

Anti-static protection: All metal parts of the antenna as well as the supplied clamp attachment are grounded. The inner conductors of both systems are coupled capacitively.

Lightning protection: The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

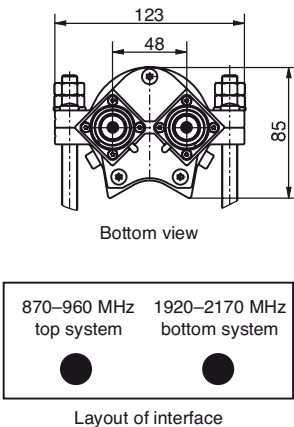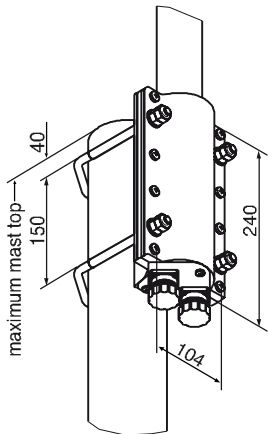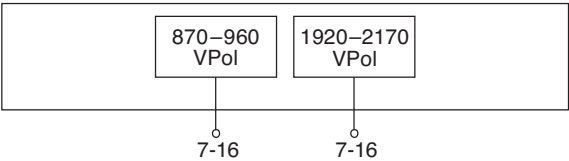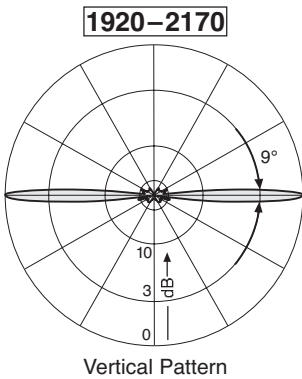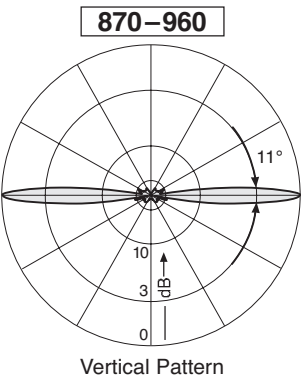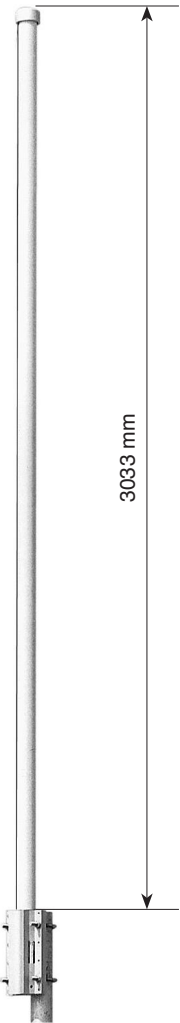

Mechanical specifications	
Input	2 x 7-16 female
Connector position	Bottom
Weight	8 kg
Wind load	230 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	3380 x 148 x 112 mm
Height	3033 mm
Radome diameter	51 mm

Multi-band Omni Antenna

870–960
1710–1880

1920–2170

KATHREIN

Antennen · Electronic

Vertical Polarization



V

V


VVPol Omni 870–960/1710–1880/1920-2170 360°/360° 2/2dBi

Type No.	80010111	
Frequency range	Top system: 870 – 960 MHz 1710 – 1880 MHz	Bottom system: 1920 – 2170 MHz
Polarization	Vertical	Vertical
Gain	2 dBi	2 dBi
Isolation, between ports	> 25 dB	> 25 dB
Impedance	50 Ω	50 Ω
VSWR	< 1.5	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	50 W (at 50 °C ambient temperature)	


- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 40 – 70 mm diameter with a mounting clamp supplied with the antenna. The connecting cables (not supplied) run outside the mast.
- Excellent grounding:** The metal parts of the antenna and the mounting kit (exclusive the inner conductor of the upper unit) are DC grounded.

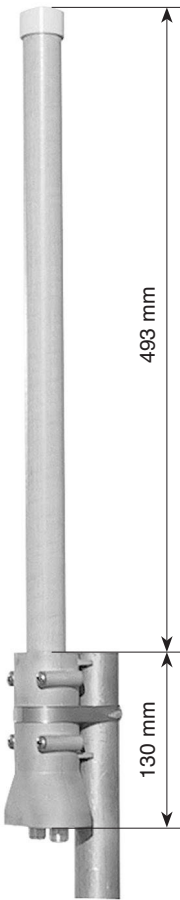


Vertical Pattern

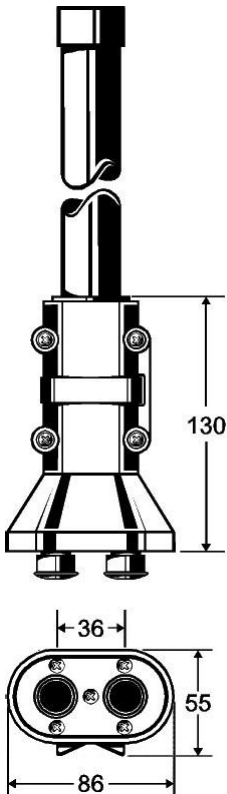

Bottom view



Layout of interface

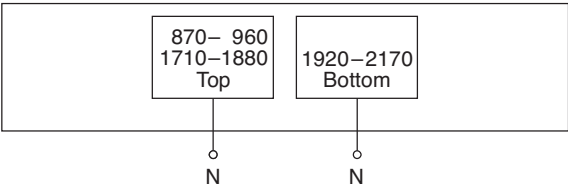

Mechanical specifications	
Input	2 x N female
Connector position	Bottom
Weight	0.85 kg
Wind load	30 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	665 x 112 x 97 mm
Height	493 mm
Radome diameter	30 mm

Omnidirectional Antenna Vertical Polarization

1710–1880



V

KATHREIN
Antennen · Electronic


VPol Omni 1710–1880 360° 11dBi

Type No.	738187
Frequency range	1710 – 1880 MHz
Polarization	Vertical
Gain	11 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< -150 dBc (2 x 43 dBm carrier)
Max. power	200 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

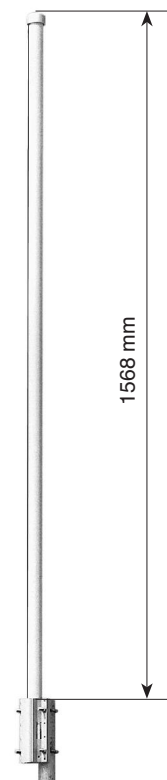

Vertical Pattern

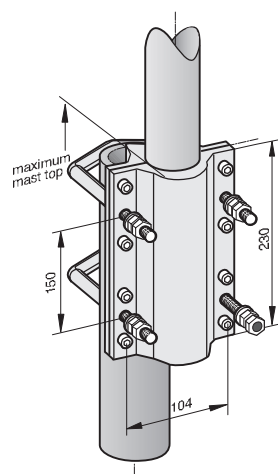

Mechanical specifications

Input	7-16 female
Connector position	Bottom
Weight	5.5 kg
Radome diameter	51 mm
Wind load	130 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	1846 x 148 x 112 mm
Height	1568 mm

Omnidirectional Antenna Vertical Polarization

1920–2170



V

KATHREIN
Antennen · Electronic


VPol Omni 1920–2170 360° 11dBi

Type No.	741790
Frequency range	1920 – 2170 MHz
Polarization	Vertical
Gain	11 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	150 W (at 50 °C ambient temperature)

- Mounting:** The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:** Radiator: Copper and brass.
Radome: Fiberglass, color: Grey.
Base: Weather-proof aluminum.
Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:** All metal parts of the antenna as well as the supplied clamp attachment are grounded.
The inner conductor is capacitively coupled.
- Lightning protection:** The antenna is designed to withstand a lightning current of up to 150 kA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

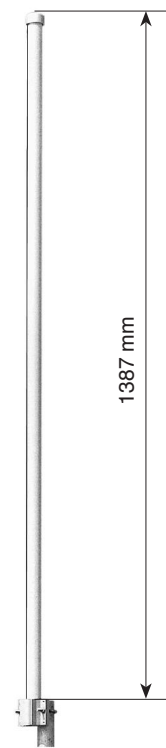

Vertical Pattern

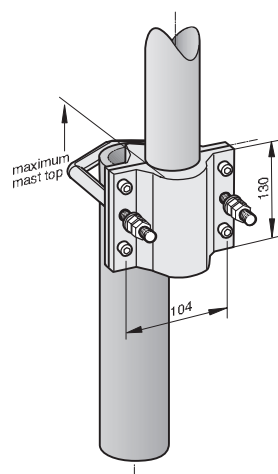

Mechanical specifications

Input	7-16 female
Connector position	Bottom
Weight	5 kg
Radome diameter	51 mm
Wind load	120 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	1570 x 148 x 112 mm
Height	1387 mm

Omnidirectional Antenna **Vertical Polarization**

2500–2700

V

KATHREIN
Antennen · Electronic

VPol Omni 2500–2700 360° 11dBi 0°T

Type No.	80010442
Frequency range	1920 – 2170 MHz
Polarization	Vertical
Gain	11 dBi
Impedance	50 Ω
VSWR	< 1.5
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Max. power	200 W (at 50 °C ambient temperature)



- Mounting:

The antenna can be attached laterally at the tip of a tubular mast of 50 – 94 mm diameter with two U-bolt brackets supplied with the antenna (connecting cable runs outside the mast).
- Material:


Radiator: Copper and brass.
 Radome: Fiberglass, color: Grey.
 Base: Weather-proof aluminum.
 Mounting kit, screws and nuts: Stainless steel.
- Anti-static protection:

All metal parts of the antenna as well as the supplied clamp attachment are grounded.
 The inner conductor is capacitively coupled.
- Lightning protection:

The antenna is designed to withstand a lightning current of up to 150 KA (impulse: 10/350 μs), according to IEC 62305 parts 1–4 and VDE 0855-300, and thereby fulfils the requirements of lightning protection class II. Grounding cross-section: 22 mm² copper.

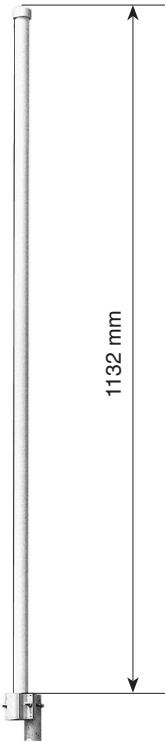

Vertical Pattern

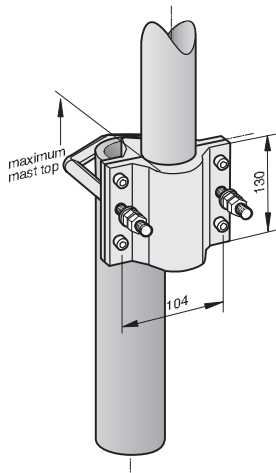

Mechanical specifications	
Input	7-16 female
Connector position	Bottom
Weight	4.5 kg
Radome diameter	51 mm
Wind load	110 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	1232 x 148 x 112 mm
Height	1132 mm

Vertical Polarization Indoor – Directional

Type	Type No.	Frequency range	Connector female	Page
VPol BiDir 65° 5dBi	738446	790–960/1710–2170	N	57
VVPol Indoor 90° 7dBi	80010465	790–960/1710–2700	N	168

Indoor – Directional Dual Polarization

VXPol Indoor 90° C 7dBi	80010677	790–960/1710–2700	2 x N	169
-------------------------	----------	-------------------	-------	-----

Indoor – Multi-band Omnidirectional

VPol Indoor 360° 2dBi	80010748	876–960/1710–2700	N	170
VPol Indoor 360° 2dBi	80010749	876–960/1710–2700	N	171
VPol Indoor 360° 2dBi	80010249	790–960/1425–3800/5150–6000	N	172
VPol Indoor 360° 2dBi	741573	1710–2700	N	173
VPol Indoor 360° 2dBi	80010430	1710–6000	N	174

Indoor – Omnidirectional Dual Polarization

VHPol Indoor 360° 2dBi	80010709	790–960/1710–2700/2500–2700	2 x N	175
------------------------	----------	-----------------------------	-------	-----

Indoor / Outdoor – Single-band

VPol Omni 360° 2dBi	738450	870–960	N	152
---------------------	--------	---------	---	-----

Indoor / Outdoor – Dual-band Multi-band

VPol Omni 360° 2dBi	738449	870–960/1710–1880	N	176
VPol Omni 360° 2dBi	80010431	1710–2700	N	177
VPol Omni 360° 2dBi	80010147	824–960/1805–2170	N	178

Indoor Multi-band Directional Antenna Vertical Polarization Half-power Beam Width Integrated Combiner

790–960 1710–2700

V

V

90°

90°

C



KATHREIN

Antennen · Electronic

VVPol Indoor 790–960/1710–2700 C 90° 7dBi


Type No.	80010465
Frequency range	790 – 960 MHz / 1710 – 2700 MHz
Polarization	Vertical
Gain	Approx. 7 dBi
Half-power beam width	Horizontal: Approx. 90°
Impedance	50 Ω
VSWR	790 – 806 MHz: < 2.2 806 – 960 MHz: < 2.0 1710 – 2700 MHz: < 2.0
Max. power	50 W (at 50 °C ambient temperature)
Input	Cable RG 223/CU of 1 m length, white, with N female connector
Protection class	IP 30
Weight	500 g
Packing size	363 x 152 x 62 mm
Height/width/depth	231 / 140 / 50 mm

- Material:** Reflector: Aluminum.
Radome: High impact polystyrol, colour: White.
Additional painting is possible.
Mounting plates: Stainless steel.
- Mounting:** Two holes of 6 mm diameter in the mounting plate. Screws are not supplied.
Avoid stressing the cable.
No stress on the hexagonal crimp.
Minimum cable bending radius: 30 mm without tensile load.
- Grounding:** All metal parts inclusive the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (790 – 2500 MHz).

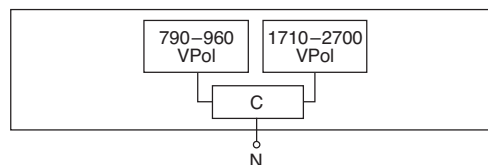


Horizontal Pattern


Mounting:



Mount the attachment plate to the wall using two screws of 4 mm diameter in the position as indicated.

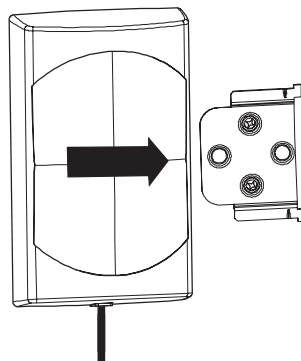

Align the antenna over the attachment plate.

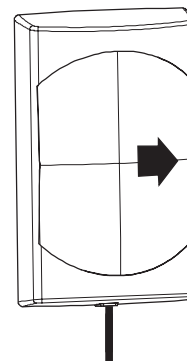

Pull the antenna to the stop.

Indoor Multi-band Directional Antenna

Vertical / Dual Polarization
Half-power Beam Width
Integrated Combiner

790–960 1710–2700 1710–2700

KATHREIN

Antennen · Electronic

V	X (–45°)	X (+45°)
90°	90°	90°
C		



VXPol Indoor 790–960/1710–2700 C 90° 7dBi

Type No.	80010677	
Frequency range	790 – 960 MHz	1710 – 2700 MHz
Polarization	Vertical	+45°, –45°
Gain	Approx. 7 dBi	Approx. 2 x 7 dBi
Half-power beam width	Horizontal: Approx. 90°	
Impedance	50 Ω	
VSWR	< 2.0	
Isolation, between ports	> 25 dB	
Max. power	50 W (at 50 °C ambient temperature)	
Input	2x Cable RG 223/CU of 1m length, white, with N female connector	
Protection class	IP 30	
Weight	600 g	
Packing size	363 x 152 x 62 mm	
Height/width/depth	232 / 140 / 50 mm	

Material: Reflector: Aluminum.
Radome: High impact polystyrol, colour: White.
Additional painting is possible.
Mounting plates: Stainless steel.


Mounting: Two holes of 6 mm diameter in the mounting plate. Screws are not supplied.
Avoid stressing the cable.
No stress on the hexagonal crimp.
Minimum cable bending radius: 30 mm without tensile load.

Available accessories: Broadband power splitters and tappers (790 – 2700 MHz).

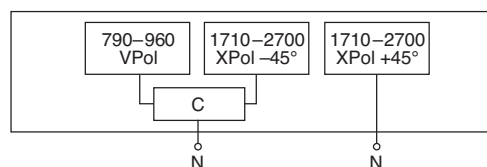


Horizontal Pattern


Mounting:



Mount the attachment plate to the wall using two screws of 4 mm diameter in the position as indicated.

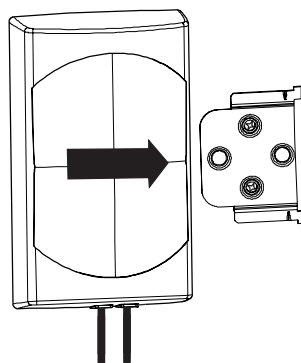

Align the antenna over the attachment plate.

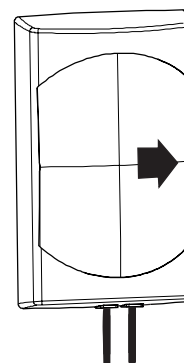

Pull the antenna to the stop.

Indoor Multi-band Omni Antenna Vertical Polarization

876–960

1710–2700

V

KATHREIN
Antennen · Electronic



- The antenna needs no additional groundplane.

VPol Indoor 876–960/1710–2700 360° 2dBi

Type No.	80010748
Frequency range	876 – 960 MHz 1710 – 2700 MHz
Polarization	Vertical
Gain	2 dBi
Impedance	50 Ω
VSWR	876 – 890 MHz: < 2.0 890 – 960 MHz: < 1.7 1710 – 2170 MHz: < 1.6 2170 – 2700 MHz: < 2.0
Max. power	50 W (at 50 °C ambient temperature)
Input	1 x N female
Weight	300 g
Diameter	210 mm
Height	78 mm (without connector)



- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Grounding:** All metal parts including the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters and tappers (800 – 2700 MHz).

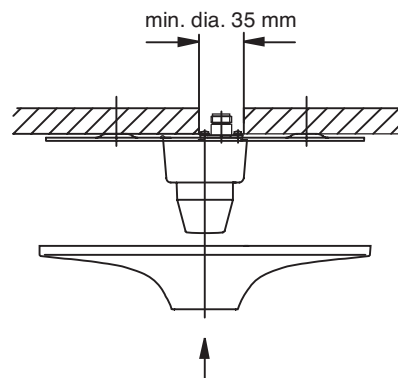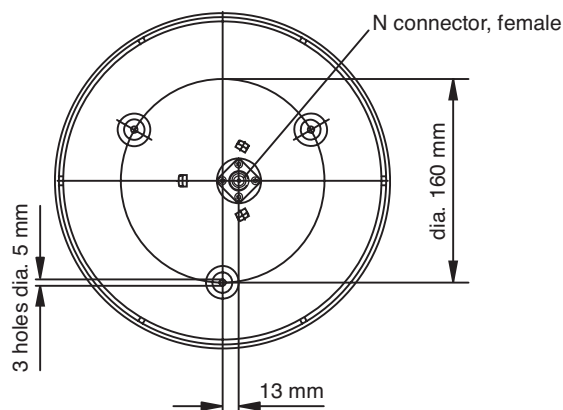

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Multi-band Omni Antenna Vertical Polarization

876–960

1710–2700

V

KATHREIN
Antennen · Electronic



- The antenna needs no additional groundplane.

VPol Indoor 876–960/1710–2700 360° 2dBi

Type No.	80010749
Frequency range	876 – 960 MHz 1710 – 2700 MHz
Polarization	Vertical
Gain	2 dBi
Impedance	50 Ω
VSWR	876 – 890 MHz: < 2.0 890 – 960 MHz: < 1.7 1710 – 2170 MHz: < 1.6 2170 – 2700 MHz: < 2.0
Max. power	50 W (at 50 °C ambient temperature)
Input	1 x N female
Weight	340 g
Diameter	215 mm
Height	85 mm (without connector)



- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Grounding:** All metal parts including the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters and tappers (800 – 2700 MHz).

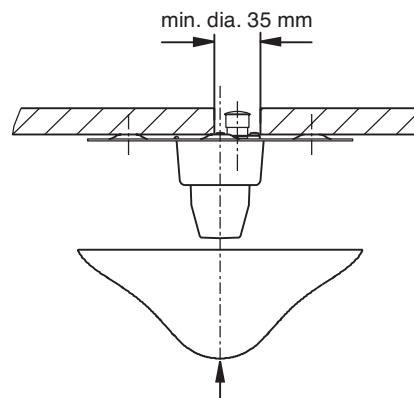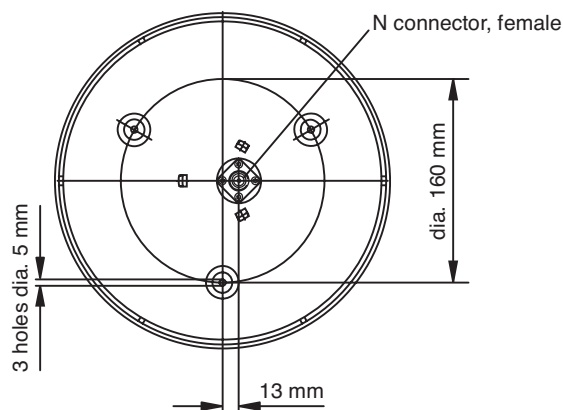

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Multi-band Omni Antenna Vertical Polarization

790–960

1425–3800

5150–6000

KATHREIN

Antennen · Electronic

V



- The antenna can be operated in all frequency ranges simultaneously.
- The antenna needs no additional groundplane.

VPol Indoor 790–960/1425–3800/5150–6000 360° 2dBi

Type No.	80010249
Frequency range	790 – 960 MHz 1425 – 3800 MHz 5150 – 6000 MHz
Polarization	Vertical
Gain	≈ 2 dBi
Impedance	50 Ω
VSWR	790 – 806 MHz: < 1.7 806 – 960 MHz: < 1.5 1425 – 1710 MHz: < 20 1710 – 2200 MHz: < 1.4 2200 – 3800 MHz: < 1.6 5150 – 6000 MHz: < 2.2
Max. power	50 W (at 50 °C ambient temperature)
Input	1 x N female
Protection class	IP 30
Weight	466 g
Packing size	277 x 277 x 169 mm
Diameter	258 mm
Height	94 mm (without connector)



- Material:** Reflector: Aluminum.
Radome: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied.
For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (790 – 2500 MHz).

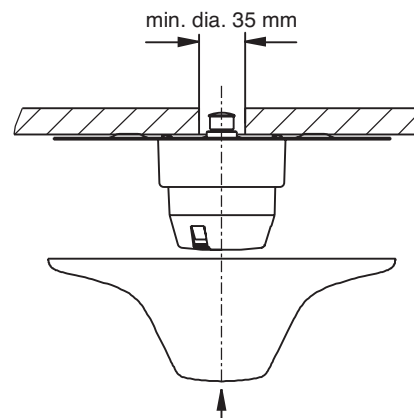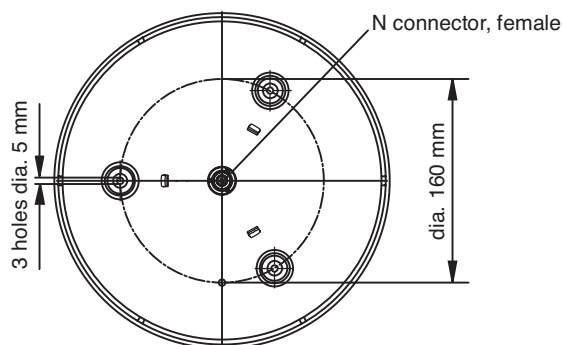

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Omnidirectional Antenna Vertical Polarization

1710–2700

V

KATHREIN
Antennen · Electronic



- The antenna can be operated in the total frequency range simultaneously.
- The antenna needs no additional groundplane.

VPol Indoor 1710–2700 360° 2dBi

Type No.	741573
Frequency range	1710 – 2700 MHz
Polarization	Vertical
Gain	2 dBi
Impedance	50 Ω
VSWR	1710 – 1880 MHz: < 1.6 1850 – 1990 MHz: < 1.6 1920 – 2170 MHz: < 1.6 2170 – 2500 MHz: < 2.0 2500 – 2700 MHz: < 2.2
Max. power	50 W (at 50 °C ambient temperature)
Input	1 x N female
Weight	150 g
Diameter	100 mm
Height	50 mm (without connector)



- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Holes in the base enable a mounting on the ceiling. Screws are supplied.
For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Grounding:** All metal parts including the inner conductor are DC grounded.
- Available accessories:** Broadband power splitters (694 – 3800 MHz) and tappers (790 – 2500 MHz).

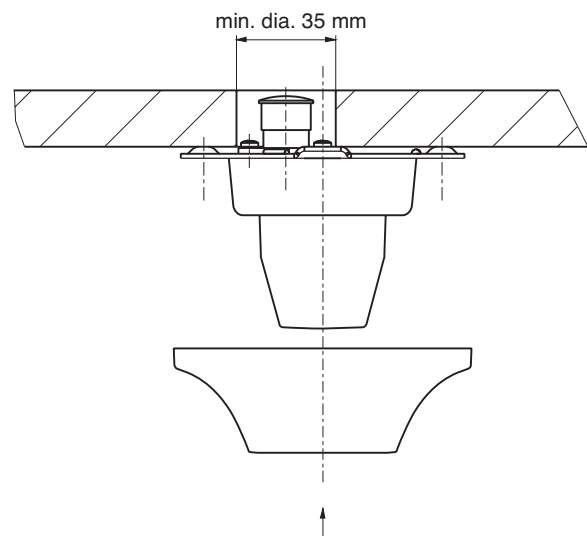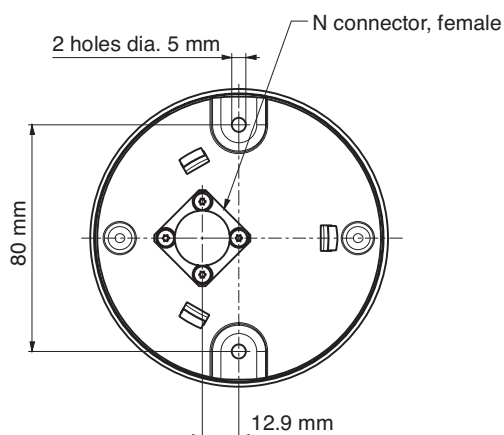

Clip the protective housing into position after the antenna has been mounted with the help of the three supplied screws.

Indoor Omnidirectional Antenna Vertical Polarization

1710–6000

V


KATHREIN

Antennen · Electronic



- The antenna can be operated in all frequency ranges simultaneously.
- The antenna needs no additional groundplane.

VPol Indoor 1710–6000 360° 2dBi

Type No.	80010430
Frequency range	1710 – 6000 MHz
Polarization	Vertical
Gain	2 dBi
Impedance	50 Ω
VSWR	< 1.5
Max. power	50 W (at 50 °C ambient temperature)
Input	1 x N female
Protection class	IP 30
Weight	133 g
Diameter	138 mm
Height	56 mm (without connector)

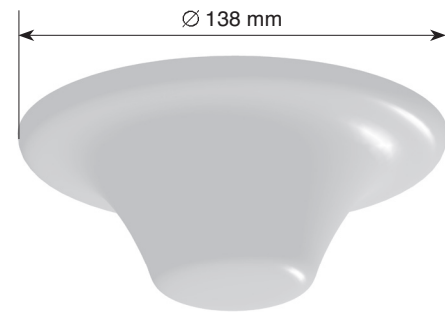

- Material:** Base: Aluminum.
Protective housing: High impact polystyrol, colour: White.
Additional painting is possible.
- Mounting:** Holes in the base enable a mounting on the ceiling. Screws are supplied.
For the N connector a hole in the ceiling with a diameter of 35 mm is required.
- Available accessories:** Broadband power splitters and tappers (800 – 2500 MHz).

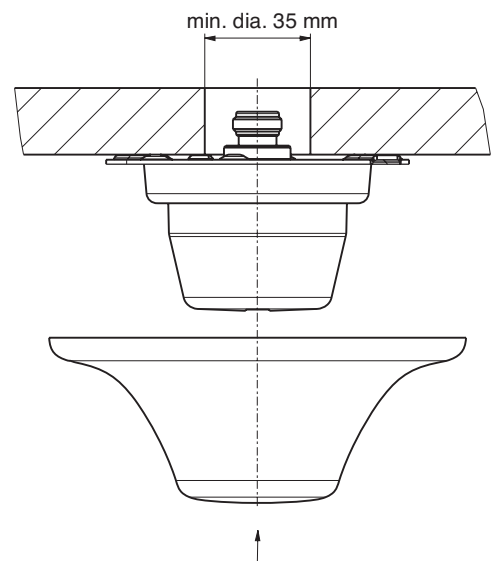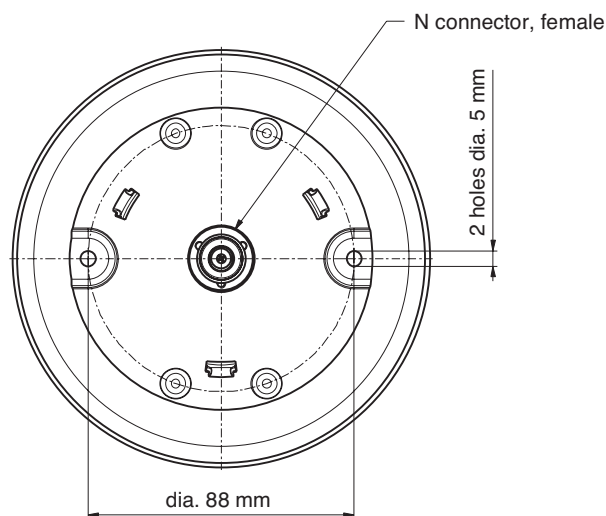

Clip the protective housing into position after the antenna has been mounted with the help of two supplied screws.

Indoor Multi-band Omni Antenna Dual Polarization

790–960

1710–2700

2500–2700

KATHREIN

Antennen · Electronic

V

H

- The antenna can be operated in all frequency ranges simultaneously.
- The antenna needs no additional groundplane.

VHPol Indoor 790 – 960/1710–2700/2500–2700 360° 2dBi




Type No.	80010709	
Frequency range	790 – 960 MHz 1710 – 2700 MHz	2500 – 2700 MHz
Polarization	Vertical	Horizontal
Gain	~ 2 dBi	
Impedance	50 Ω	
VSWR	790 – 960 MHz: < 2.0 1710 – 2700 MHz: < 2.0	2500 – 2700 MHz: < 2.0
Isolation	> 30 dB	
Max. power	50 W (at 50 °C ambient temperature)	
Input	2 x N female	
Protection class	IP 30	
Weight	Approx. 500 g	
Packing sizw	277 x 277 x 169 mm	
Diameter	258 mm	
Height	94 mm (without connector)	



Material: Reflector: Aluminum. Radome: High impact polystyrol, colour: White. Additional painting is possible.

Mounting: Three holes in the base enable a mounting on the ceiling. Two types of screws are supplied. For the N connectors a hole in the ceiling is required.

Available accessories: Broadband power splitters (694 – 3800 MHz) and tappers (694 – 2700 MHz).

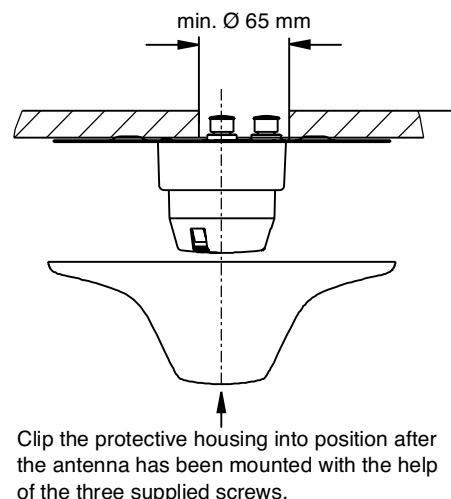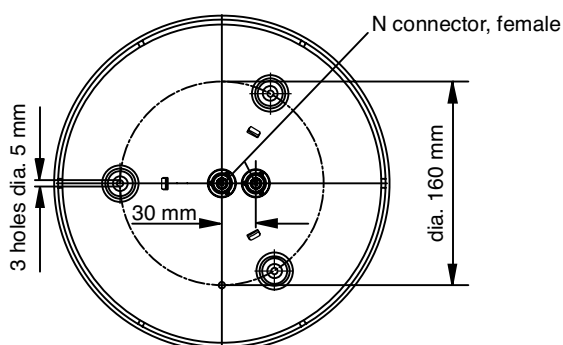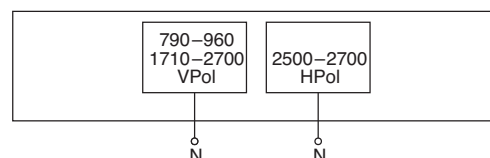

Dual-band Omni Antenna
Vertical Polarization
Indoor and outdoor use

870–960/1710–1880


V

VPol Omni 870–960/1710–1880 360° 2dBi

Type No.	738449
Input	1 x N female
Connector position	Bottom or top
Frequency range	870 – 960 MHz / 1710 – 1880 MHz
VSWR	< 1.7
Gain	2 dBi
Impedance	50 Ω
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Polarization	Vertical
Max. power	50 W: 870 – 960 MHz 50 W: 1710 – 1880 MHz (at 50 °C ambient temperature)
Weight	250 g
Radome diameter	20 mm
Height	216 mm

Material:
Radiator: Brass.
Radome: Fiberglass, colour: White.

Mounting:
One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.



Vertical Pattern



Omnidirectional Antenna **Vertical Polarization** **Indoor and outdoor use**

1710–2700

V

VPol Omni 1710–2700 360° 2dBi


Type No.	80010431
Input	N female
Connector position	Bottom or top
Frequency range	1710 – 2700 MHz
VSWR	< 1.8
Gain	2 dBi
Impedance	50 Ω
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)
Polarization	Vertical
Max. power	50 W (at 50 °C ambient temperature)
Weight	150 g
Radome diameter	20 mm
Height	115 mm

- Material:

Radiator: Brass.
 Radome: Fiberglass, colour: White.
- Mounting:

One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.
- Grounding:

All metal parts of the antenna and the mounting kit are DC grounded. The inner conductor is not DC grounded.



Vertical Pattern

Dual-band Omni Antenna
Vertical Polarization
Indoor and outdoor use


824–960/1805–2170

V

VPol Omni 824–960/1805–2170 360° 2dBi

Type No.	80010147
Input	1 x N female
Connector position	Bottom or top
Frequency range	824 – 960 MHz / 1805 – 2170 MHz
VSWR	< 2.0
Gain	2 dBi
Impedance	50 Ω
Polarization	Vertical
Max. power	50 W: 824 – 960 MHz 50 W: 1805 – 2170 MHz (at 50 °C ambient temperature)
Weight	250 g
Radome diameter	20 mm
Height	216 mm

- Material:
Radiators: Brass.
Radome: Fiberglass, colour: White.
- Mounting:
One hole mounting (16 mm diameter) to surfaces of max. 10 mm thickness.
- Grounding:
All metal parts of the antenna as well as the inner conductor and the mounting kit are DC grounded.



Vertical Pattern



Type	Type No.	Page
Kathrein's Remote Electrical Tilt System		
General information		180
Data sheets of RET components		
Slimline Remote Control Unit (RCU)	86010147 / 86010148	182
Central Control Unit (CCU) for indoor use	86010006 / 86010026	183
Portable Control Adapter (PCA)	86010046	184
Power Supply and Signal Cable	86010007, ...	185
DC Power and Signal Splitter	86010002	186
Lightning Protection Device	86010030	187
Earthing Clamp	86010031	188
Smart Bias Tee	78211053 / ..54 / ..55 / ..56	318
	78211063 / ..64 / ..65 / ..66	318

The answer to all current and future network demands

Network planning is becoming ever more complicated, especially with the advent of 3G and/or 4G (LTE).

The challenge for wireless network operators is to balance coverage, capacity, call quality and costs in order to gain maximum revenue from their network. Each of the above factors affects the others and so network engineers use many different techniques

for establishing the right balance they are trying to achieve.

One of these methods is adjusting the antenna's downtilt. Here, the engineer must take into consideration certain facts, such as the weather, access to the cell site, availability of specialized installation teams and special equipment etc. Moreover, such an antenna adjustment can typically take several hours to perform.

Since the cell site is usually switched off for safety reasons during such an adjustment, this results in lost calls and therefore revenue whilst these changes are being made. Consequently, operators tend to make fewer adjustments and so networks are often left operating unoptimized, which also eventually results in lost revenue for the operators.



However, with Kathrein's Remote Electrical Tilt unit engineers can make the necessary adjustments without shutting down the whole system!

Further advantages of using Kathrein's Remote Electrical Tilt (RET) system:

- No need for specialized teams trained in altitude work or with special safety skills
- Limited site access and/or time restrictions are not so important
- No special platforms or other means of access to the antenna are required
- Adjustments can be made and the relevant measurements performed speedily
- Network alterations can be carried out irrespective of weather conditions
- No reduction in coverage – cells remain fully operational whilst changes are being made
- Operators estimate that approx. 20% of UMTS equipment can be saved by using such a RET system.




RET components



Kathrein's overall RET system works in accordance with the AISG (Antenna Interface Standards Group) standard and 3 GPP (3rd Generation Partnership Project).

For details of RET system
please see
Kathrein RET system brochure

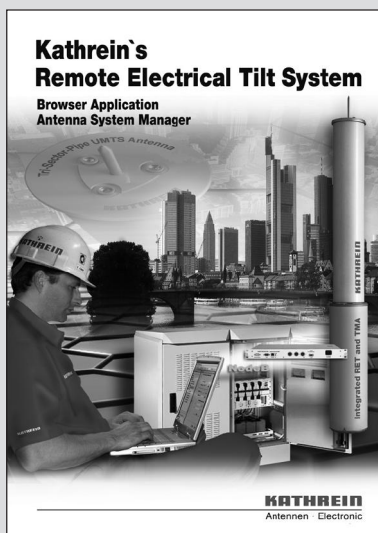

Slimline RCU
(Remote Control Unit)



CCU (Central Control Unit)



PCA
(Portable Control Adapter)



DC Power and Signal Splitter



Optional:

Smart Bias Tee



Control Cable



DTMA (Double Tower Mounted Amplifier)



Lightning Protection Device



Smart Plex®



Earthing Clamp



Remote Control Unit (RCU) for Kathrein base station antennas with adjustable electrical down-tilt and appropriate mechanical interface.

- Compliant to AISG 1.1 and 3GPP/AISG 2.0
- Compact size
- Daisy Chain feasibility
- Suitable for operation under outdoor condition



Type No.	86010147	86010148
Protocols	compliant to AISG 1.1 and 3GPP/AISG 2.0	
Logical interface ex factory ¹⁾	AISG 1.1	3GPP/AISG 2.0
Input voltage range	10 ... 30 V (pin 1, pin 6)	
Power consumption	< 1 W (stand by); < 10 W (motor activated)	
Connectors ²⁾	2 x 8 pin connector according to IEC 60130-9; according to AISG Daisy chain in: male; Daisy chain out: female	
Hardware interfaces	RS 485A/B (pin 5, pin 3); power supply (pin 1, pin 6); DC return (pin 7); according to AISG / 3GPP	
Adjustment time (full range)	40 sec (typically, depending on antenna type)	
Adjustment cycles	> 50,000	
Temperature range	-40 °C ... +60 °C	
Protection class	IP 24	
Lightning protection	AISG interface (each pin) 2.5 kA (10/350 µs) 8 kA (8/20 µs)	
Housing material	Profile: Aluminum anodized; cover: Aluminum die cast coated	
Weight	455 g (0.99 lbs)	
Packing size	245 x 93 x 102 mm, (9.6 x 3.6 x 4 inches)	
Dimensions (H x W x D)	177.5 x 59.5 x 49.5 mm, (7.0 x 2.3 x 1.9 inches)	

¹⁾ The protocol of the logical interface can be switched from AISG 1.1 to 3GPP/AISG 2.0 and vice versa with a vendor specific command. Start-up operation of the RCU 86010147 is only possible in a RET system supporting AISG 1.1 and start-up operation of the RCU 86010148 is only possible in a RET system supporting 3GPP/AISG 2.0!
The protocol can also be changed as follows: *AISG 1.1 to 3 GPP*: Enter "3GPP" into the additional data field "Installer's ID" and perform a layer 7 reset or a power reset. *3GPP to AISG 1.1*: Enter "AISG1" into the additional data field "Installer's ID" and perform a layer 2 reset or a power reset. After switching the protocol any other information can be entered into the "Installer's ID" field.

Please note:

If the Primary of the RET system doesn't support the standard of the 'logical interface ex factory', the RCU must be switched to the appropriate standard of the Primary before installation. Please contact Kathrein for further information.

²⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened').
The connector should be tightened by hand only!

Standards: EN 60950-1 (Safety)
EN 60950-22 (Safety – Equipment installed outdoor)
EN 55022 (Emission)
EN 55024 (Immunity)
ETS 300019-1-4 (Environmental)
UL 60950-1; 1st edition

Certification: CE, FCC


Scope of supply: Remote Control Unit
Assembly paste



Daisy chain in (male) Daisy chain out (female)



Bottom view of RCU

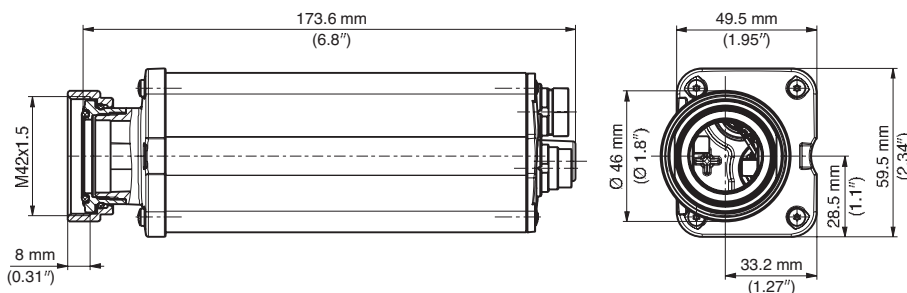

Central Control Unit (CCU) For Remote Electrical Tilt (RET) and Tower Mounted Amplifier (TMA) Control

KATHREIN
Antennen · Electronic

For indoor use



Central Control Unit

Type No.	86010006	86010026
Connectors ¹⁾ to RCU	3 x 8 pin connector acc. to IEC 60130-9, female, acc. to AISG	
Power supply from BTS	DC: -48 V / max. 1.7 A AC: 100 ... 240 V / 50 ... 60 Hz / max. 1.6 A	DC: -48 V / max. 1.7 A
Power supply to RCU	3 x +29 V DC / max. 1.7 A (in total) 3 x +13 V DC / max. 3.8 A (in total)	
Total output power	Max. 50 W	
Interface to RCU and TMA	RS 485 / power supply	
Protocol to RCU and TMA	HDLC hex-coded command set, acc. to AISG	
Interface to BTS	Ethernet (10 Base-T) and RS 232	
Protocols to BTS	TCP/IP, PPP, HTTP/HTML, UDP, DHCP, FTP, SNMP, ICMP/PING	
Alarm interface to BTS	8 x open collector output, user programmable	
Max. number of RCU's and/or TMA's	Up to 27 RCU's in daisy chain and up to 6 DTMA's; depending on cable configuration and max. power	
Max. length of control cable	200 m (9 RCU's in daisy chain configuration)	
Temperature range	-25 °C ... +55 °C ambient temperature	
Packing size	597 mm x 367 mm x 148 mm	
Dimensions (h / w / d)	19" 1 HU* (43.6 mm / 483 mm / 250 mm)	

* HU = Height Unit

¹⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand tightened').
The connector should be tightened by hand only.


Standards: EN 60950-1
EN 55022
EN 55024
UL 60950-1, 1st edition

Certifications: CE, FCC part 15 class B; UL


Scope of supply: CCU
RET Manual
DC Cable
AC Power Cords for USA, UK and Germany
Ethernet cable, crossed



CCU Interfaces

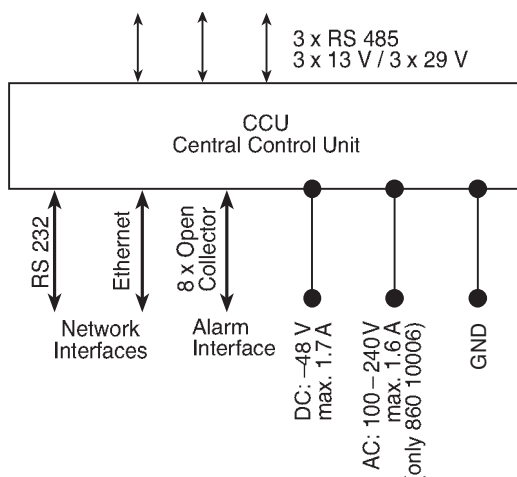

Examples of CCU – RCU connections

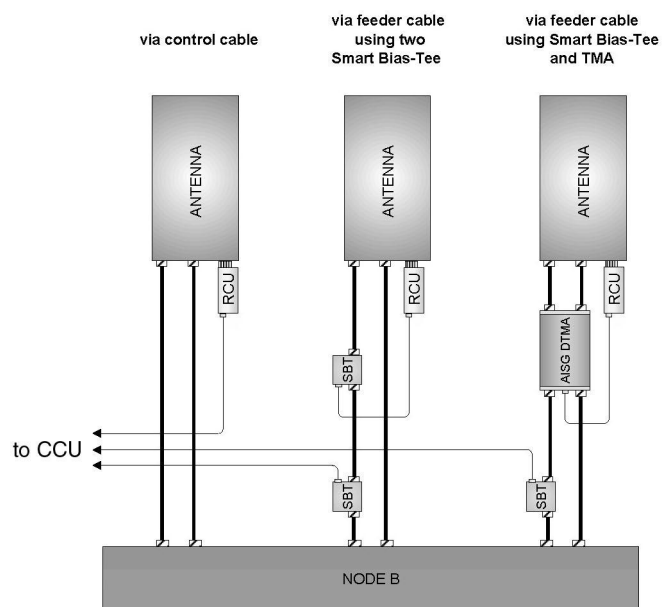

Portable Control Adapter (PCA) For Remote Control Unit (RCU) For Tower Mounted Amplifier (TMA)

KATHREIN
Antennen · Electronic



Portable Control Adapter

Type No.	86010046
Connector * to RCU/TMA	1 x 8-pin connector according to IEC 60130-9, female, conforming to AISG RF-connector (SMB male)
Input voltage of PCA	24 V DC
Output voltage to RCU's/ TMA's	AISG female pin 6 (24 V DC): 24 V DC $\pm 10\%$ AISG female pin 1 (12 V DC): 14 V DC $\pm 7\%$ RF male (at 24 V DC): 24 V DC $\pm 10\%$ *** RF male (at 12 V DC): 14 V DC $\pm 7\%$ ***
Output power (power supply to RCU's/ TMA's)	AISG female pin 6 (24 V DC) without load on pin 1 (12 V DC) and on RF-plug: ≤ 60 W AISG female Pin 1 (12 V DC) with max. 30 W load on pin 6 (24 V DC) and/or on RF plug: ≤ 30 W
Current monitoring measurement level	Per branch (12 V, 24 V, RF): 10 – 2500 mA
Over-current protection	Per branch (12 V, 24 V, RF): < 2500 mA
Interface to RCU/TMA	RS 485 / power supply / RF connector (SMB male)
Protocol to RCU/TMA	HDLC hex-coded command set, conforming to AISG 1.1 and 3GPP / AISG 2.0
Interface to PC	USB 1.1/2.0
Max. number of RCU's/TMA's	27/3 pcs., depending on system configuration and length of control cable
Max. length of control cable	200 m / 9 RCU's (in daisy chain configuration) 150 m / 6 RCU's (in splitter configuration)
Weight	535 g (incl. external power adapter)
Temperature range	0 ... +55 °C ambient temperature
Height x width x depth	40 mm x 95 mm x 160 mm
External power supply **	Input: 90 – 264 V AC, 47 – 63 Hz 24 V DC / 3.0 A

* Tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened').

The connector should be tightened by hand only!

** If powered via AISG-interface, no external power supply is required.

*** Switchable with software

Certificate:

CE
FCC part 15 class B
UL (for external power adapter)

Standards:


EN 60950-1
EN 55022
EN 55024

System requirements for PCA Software:

Windows 2000; Windows XP, Vista, Win7
(32 bit version)

Scope of supply:

PCA
External power supply (24 V DC / 70 W)
USB cable
AC power cable
CD-ROM with PCA software, drivers and manual
Installation guide

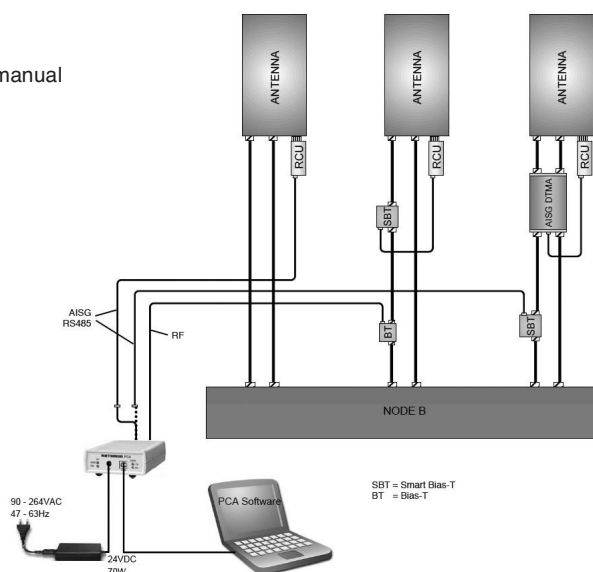

SBT = Smart Bias-T
BT = Bias-T

Connecting Cable For Remote Electrical Tilt (RET) System

For indoor and outdoor use

RET Cable for power supply and control

Type No.	86010007 ...
Connectors	2 x 8 pin connector according IEC 60130-9, female/male
Tightening torque for fixing the connectors	0.5 – 1 Nm (The connector should be tightened by hand only)
Construction	Screen 1x twisted pair 100 Ω/1 MHz 2x power supply, 1x ground AWM style 20317 I/II A/B + 20549 + 20233
Rated current	4 A (power supply) (at 50 °C air temperature)
Temperature range	–40 °C to +80 °C, (fixed position)
Protection class	IP 67 (connected)
Cable diameter	8 mm
Flammability	VL 1581 VW-1 CSA FT 1
Colour	Black, similar to RAL 9005


Minimum bending radius: One time 60 mm,
several times 120 mm.

The male and female connectors of all Kathrein RET products are compatible components which are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E.



Control Cable

Length	Type No.
0.5 m	86010054
1 m	86010007
2 m	86010008
3 m	86010029
5 m	86010009
10 m	86010010
20 m	86010032
25 m	86010011
40 m	86010012
50 m	86010033
60 m	86010013
80 m	86010014
100 m	86010015

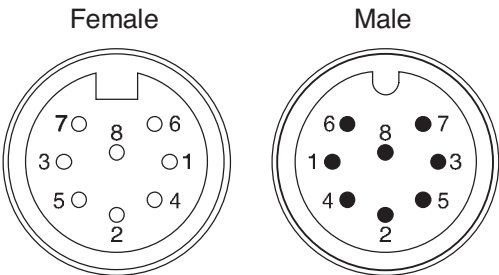

- PIN assignment according AISG:**
- 1 +13 V DC (+12 V DC nominal)
 - 2 not connected
 - 3 RS485 B
 - 4 not connected
 - 5 RS485 A
 - 6 +29 V DC (+24 V DC nominal)
 - 7 DC Return
 - 8 not connected

DC-Power and Signal Splitter For Remote Electrical Tilt (RET) Indoor and Outdoor Use

AISG compliant device for splitting of DC-power and control signals from one input to three outputs.



3-way Splitter for RET

Type No.	86010002
Connectors ¹⁾	4 x 8 pin connector according IEC 60130-9, 1 x male, 3 x female
Rated current (power supply)	3 A (at 50 °C)
Max. voltage	60 V
Protection class	IP 65
Weight	250 g
Packing size	114 mm x 117 mm x 117 mm
Height/width/depth	91 mm / 103 mm / 72 mm

¹⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!


- Material:

Connector plate: Aluminum.
Cap: Plastic.
- Mounting:

Mast mounting (50 – 145 mm diameter) by clamp.
Wall mounting by screws (not supplied).
- Note:

Connectors must be situated at the bottom.
No inverted mounting possible.
- Scope of supply:

3-way Splitter
Clamp (Art.-No. 1311847)

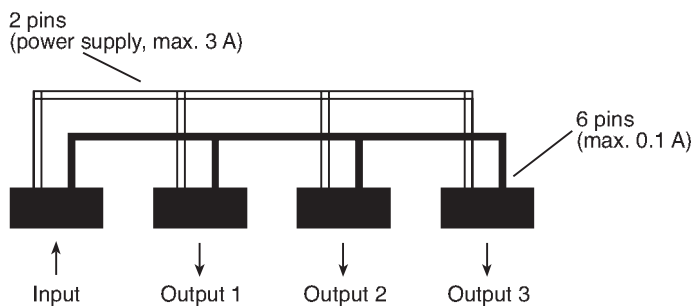

Clamp, Art. No. 1311847

Lightning Protection Device (LPD) For Remote Electrical Tilt (RET) Indoor and Outdoor Use

The device is designed for lightning protection of control cables carrying partial lightning currents up to 25 kA (shield) and 2.5 kA (inner conductor), according IEC 61643-1, IEC 61312-3. Each pin is protected individually.




Lightning Protection Device for RET

Type No.	86010030
Connectors ¹⁾	2 x 8 pin connector according IEC 60130-9, input: male, output: female
SPD-Type	8 x bipolar gas tube
Max. impuls current	25 kA (housing, shield) (10/350 μ s) inner conductors: 2.5 kA/pin (10/350 μ s)
Max. dynamic overvoltage at spark gap (1 kV/ μ s)	< 700 V
Static overvoltage (100 V/s)	< 100 V
Grounding	Via mounting plate / clamps at metallic surfaces or via separate cable, min. cross-section 5 mm ² Cu (screw M6)
Max. operation current	4 A at 50 °C
Max. operation voltage	60 V
Weight	250 g
Packing size	114 mm x 117 mm x 117 mm
Height/width/depth	91 mm / 103 mm / 72 mm

¹⁾ The tightning torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be tightened by hand only!

- Material:** Connector plate: Aluminum.
Cap: Plastic.
- Mounting:** Mast mounting (50 – 145 mm diameter) by clamp.
Wall mounting by screws (not supplied).
- Note:** **No decoupling elements are integrated. The coordination with additional LPD's (device input) should be checked according to IEC 61312.**
- Grounding of the device via the mounting plate at metallic surfaces or via additional grounding cable (not included in the delivery extend).**
- Connectors must be situated at the bottom. No inverted mounting possible.**
- Important: A control cable with a minimum length of 2 meters is required between Lightning Protection Device and Central Control Unit at the BTS to achieve the required decoupling.**
- Scope of supply:** Lightning Protection Device
Clamp (50 ... 145 mm)

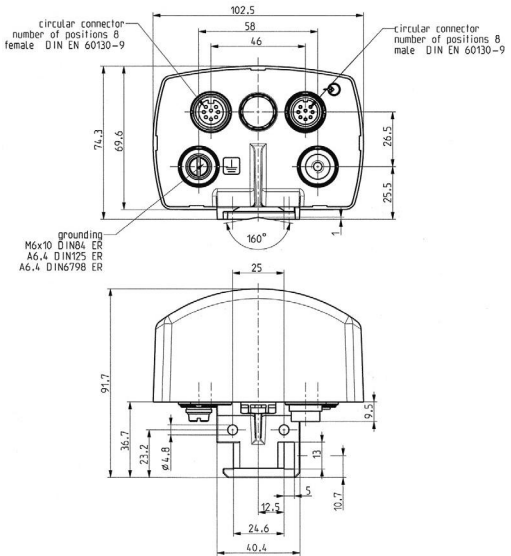

Earthing Clamp For Power Supply and Control Cable For Remote Control Unit (RCU)

KATHREIN
Antennen · Electronic

The clamp is designed for lightning protection of control cables according to EN 50164-1


Earthing clamp for RCU power supply and signal cable

Type No.	86010031
Max. lightning current	20 kA (pulse 10/350 μ sec)
Contact resistance	< 3 m Ω
Protection class	IP 68
Grounding	Via stranded grounding wire, 16 mm ² , length 0.5 m, one end terminated with cable eye (10 mm lug)
Packing size	Plastic bag: 210 mm x 210 mm
Weight	160 g

Material: Body: Stainless steel with vulcanized Ethylene-Propylene-Caoutchouc
Screw: Stainless steel
Skin: Copper alloy
Grounding wire: Copper


Note: The earthing clamp is suitable only for the Kathrein Power Supply and Signal Cables,
Type No. 860 10007 to 860 10015, 860 10029, 860 10032, 860 10033, 860 10054 to 860 10060 or shielded cables with
– shield diameter 6.1 mm
– jacket diameter 7.8 mm $\pm$ 0.3 mm

The kit contains: 1 x Grounding kit body incl. Butyl sealing rope covered with paper
1 x Screw M6 DIN 912
1 x Grounding wire

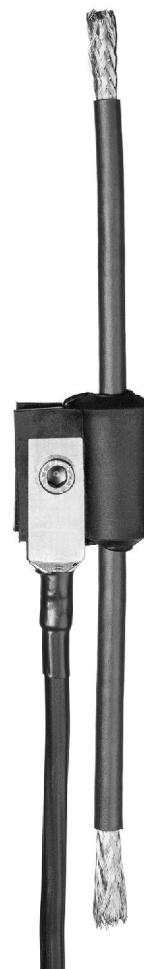

Mounting instructions:

This instruction is written for qualified and experienced personnel. Please read it carefully before starting work. Any liability or responsibility for the result of improper or unsafe installation is disclaimed!

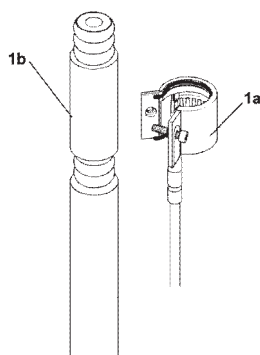


Attention!


Install grounding kit only where the cable runs straight.

Fig. 1a Preassembled grounding kit.

Fig. 1b Clean the plastic jacket at the desired grounding point and cut out a strip of 15 mm with aid of a suitable stripping tool.



Remove covering paper from Butyl sealing. Wrap the grounding kit body around the cable and align it.



Tighten the screw (> 6 Nm)

Splitters

Type	Type No.	Frequency range	Remark	Max. power	Connector female	Page
2-way Splitter 380–3800	86010130	380 – 3800 MHz	Indoor/Outdoor	200 W	N	190
2-way Splitter 380–3800	86010131	380 – 3800 MHz	Indoor/Outdoor	700 W	7-16	190
2-way Splitter 694–2700	86010017	694 – 2700 MHz	Indoor	100 W	N	191
3-way Splitter 694–2700	86010018	694 – 2700 MHz	Indoor	100 W	N	191
4-way Splitter 694–2700	86010019	694 – 2700 MHz	Indoor	100 W	N	191
2-way Splitter 694–3800	86010100	694 – 3800 MHz	Indoor/Outdoor	200 W	N	192
2-way Splitter 694–3800	86010101	694 – 3800 MHz	Indoor/Outdoor	700 W	7-16	192
3-way Splitter 694–3800	86010102	694 – 3800 MHz	Indoor/Outdoor	200 W	N	192
3-way Splitter 694–3800	86010103	694 – 3800 MHz	Indoor/Outdoor	700 W	7-16	192
4-way Splitter 694–3800	86010104	694 – 3800 MHz	Indoor/Outdoor	200 W	N	192
4-way Splitter 694–3800	86010105	694 – 3800 MHz	Indoor/Outdoor	700 W	7-16	192

Tappers

2-way Tapper 694–2700 7.0/1.0 dB	86010136	694 – 2700 MHz	Indoor	100 W	N	193
2-way Tapper 694–2700 10.4/0.4 dB	86010137	694 – 2700 MHz	Indoor	100 W	N	193
2-way Tapper 694–2700 15.1/0.1 dB	86010138	694 – 2700 MHz	Indoor	100 W	N	193
2-way Tapper 694–2700 7.0/1.0 dB	86010150	694 – 2700 MHz	Indoor/Outdoor	500 W	7-16	194
2-way Tapper 694–2700 10.4/0.4 dB	86010151	694 – 2700 MHz	Indoor/Outdoor	500 W	7-16	194
2-way Tapper 694–2700 15.1/0.1 dB	86010152	694 – 2700 MHz	Indoor/Outdoor	500 W	7-16	194

Continuously adjustable ratio

2-way Tapper 790–960/1710–2170 5.0–15.0dB	K63236001	790 – 960 MHz 1710 – 2170 MHz	Indoor	100 W	N	195
2-way Tapper 870–960/1710–2500 5.0–15.0dB	86010023	870 – 960 MHz 1710 – 2500 MHz	Indoor	100 W	N	195

Antenna Measurement Tools (from Schomandl)

SWR Instrument FAT 2710N	196
WLAN Power Meter (VSWR)	197

Power Meter

WLAN Power Meter (Power)	197
Broadcast RF Power Monitor	198
Safe One Resonant RF Safety Monitor	199

Low-loss Power Splitters Multi-band

380–3800



KATHREIN
Antennen · Electronic

For indoor and outdoor use.

2-way Splitter 380–3800


Type No.	86010130	86010131
Connector (female)	N	7-16
Max. power (at 50 °C ambient temperature)	200 W	700 W
For connecting ... antennas	2	
Frequency range	380 – 3800 MHz	
VSWR	< 1.5	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Impedance	50 Ω	
Insertion loss	< 0.05 dB	
Weight	750 g	870 g
Packing size	300 x 75 x 75 mm	

- Material: Brass. Surface treatment: CuSnZn3
- Mounting: Bracket for wall mounting included in the scope of supply.
For pipe mast mounting use clamps listed below (order separately).
- DC capability: DC transmission between all terminations (suitable for remote power supply systems).
- Environmental conditions: ETS 300 019-1-4 class 4.1 E
– Low temperature: –55 °C
– High temperature (dry): +60 °C
IP 65

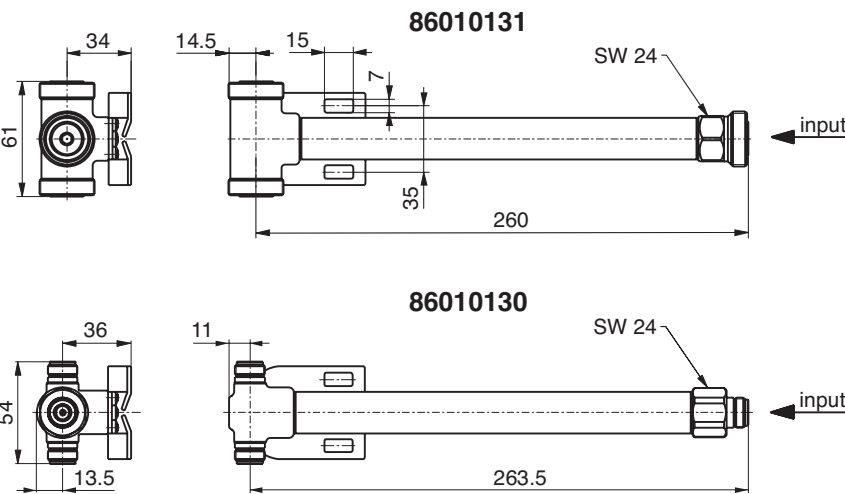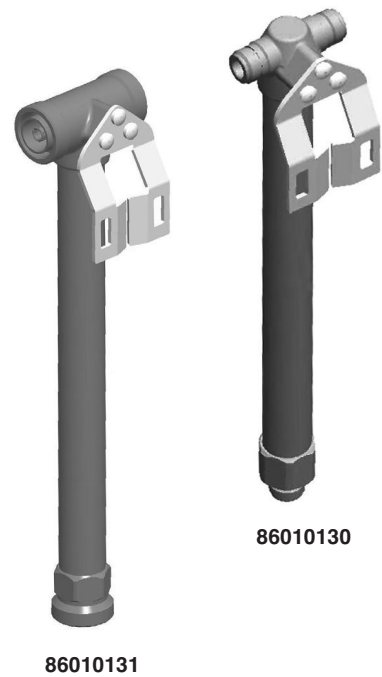

Clamps (order separately)

Type	Description	Remarks
736801	1 clamp	Mast: 34 – 60 mm diameter
736802	1 clamp	Mast: 60 – 80 mm diameter
736803	1 clamp	Mast: 80 – 100 mm diameter
736804	1 clamp	Mast: 100 – 120 mm diameter
736805	1 clamp	Mast: 120 – 140 mm diameter

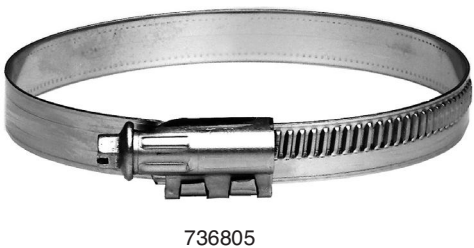

For indoor use.

2-way Splitter 694–2700

3-way Splitter 694–2700


4-way Splitter 694–2700

Type No.	86010017	86010018	86010019
Frequency range	694 – 2700 MHz		
For connecting ... antennas	2	3	4
Insertion loss	< 0.05 dB		
Impedance	50 Ω		
VSWR	694 – 894 MHz: 790 – 2500 MHz: 2500 – 2700 MHz:	< 1.52 < 1.25 < 2.02	< 1.5 < 1.3 < 2.0
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power	100 W (at 50 °C ambient temperature)		
Connector	N female		
Weight	approx. 0.6 kg		
Profile cross-section	25 x 25 mm		
Packing size	242 x 110 x 95 mm		
Max. size	204 / 63 / 41 mm		

Material: Housing: Aluminum.
Inner conductor: Brass.

DC capability: DC transmission between all terminations
(suitable for remote power supply systems).

Environmental conditions: IP 52

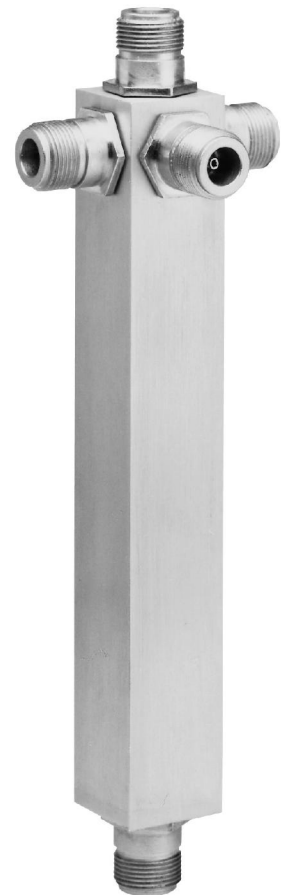

Input 
86010019

Low-loss Power Splitters Multi-band

694–3800

KATHREIN
Antennen · Electronic

For indoor and outdoor use.

2-way Splitter 694–3800

3-way Splitter 694–3800

4-way Splitter 694–3800



Type No.	86010100	86010101	86010102	86010103	86010104	86010105
Connector (female)	N	7-16	N	7-16	N	7-16
Max. power (at 50 °C ambient temperature)	200 W	700 W	200 W	700 W	200 W	700 W
For connecting ... antennas	2		3		4	
Frequency range	694 – 3800 MHz					
VSWR	694 – 894 MHz: < 1.32 790 – 3800 MHz: < 1.15					
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)					
Impedance	50 Ω					
Insertion loss	< 0.05 dB					
Weight	750 g	870 g	760 g	900 g	775 g	960 g
Packing size	300 x 75 x 75 mm					

Material: Brass. Surface treatment: CuSnZn3

Mounting: Bracket for wall mounting included in the scope of supply.
For pipe mast mounting use clamps listed below (order separately).


DC capability: DC transmission between all terminations (suitable for remote power supply systems).

Environmental conditions: ETS 300 019-1-4 class 4.1 E
– Low temperature: –55 °C
– High temperature (dry): +60 °C
IP 65

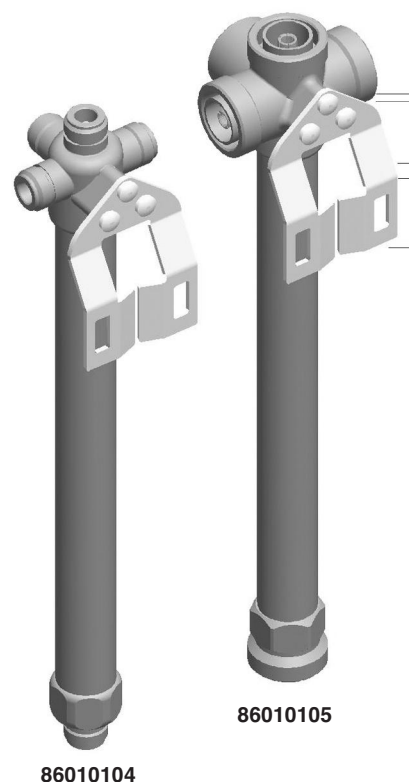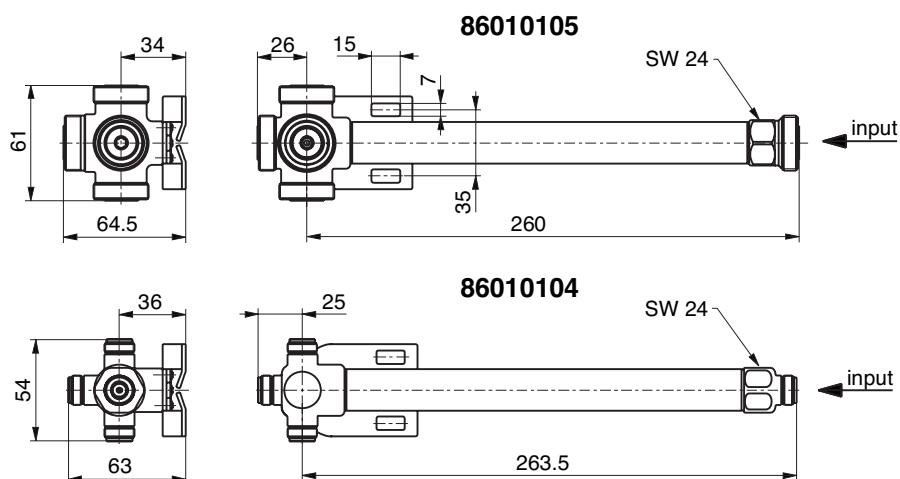

Clamps (order separately)

Type	Description	Remarks
736801	1 clamp	Mast: 34 – 60 mm diameter
736802	1 clamp	Mast: 60 – 80 mm diameter
736803	1 clamp	Mast: 80 – 100 mm diameter
736804	1 clamp	Mast: 100 – 120 mm diameter
736805	1 clamp	Mast: 120 – 140 mm diameter

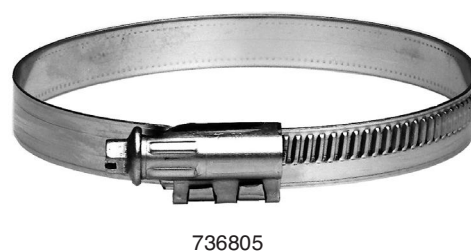

Low-loss Power Tappers

Multi-band

694–2700

KATHREIN
Antennen · Electronic

For indoor use.

2-way Tapper 694–2700 7.0 /1.0dB
2-way Tapper 694–2700 10.4/0.4dB
2-way Tapper 694–2700 15.1/0.1dB

Type No.	86010136	86010137	86010138
Frequency range	694 – 2700 MHz		
Tap Loss	– 1.0 dB	– 0.4 dB	– 0.1 dB
Input ↔ P ₁	– 7.0 dB	– 10.4 dB	– 15.1 dB
Input ↔ P ₂			
For connecting ... antennas	2		
Insertion loss	< 0.05 dB		
Impedance	50 Ω		
VSWR	694 – 790 MHz: < 2.0 790 – 2500 MHz: < 1.5 2500 – 2700 MHz: < 2.0		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power	100 W (at 50 °C ambient temperature)		
Connector	N female		
Weight	500 g		
Profile cross-section	25 x 25 mm		
Packing size	267 x 95 x 111 mm		
Max. size	244 / 64 / 25 mm		

Material: Housing: Aluminum.
Inner conductor: Brass.

DC capability: DC transmission only between input and port P₁.
P₂ is coupled capacitively.

Environmental conditions: IP 52



Low-loss Power Tappers Multi-band

694–2700

KATHREIN
Antennen · Electronic

For indoor and outdoor use.


2-way Tapper 694–2700 7.0 /1.0dB

2-way Tapper 694–2700 10.5/0.5dB

2-way Tapper 694–2700 15.3/0.3dB


Type No.	86010150	86010151	86010152
Frequency range	694 – 2700 MHz		
Tap Loss			
Input ↔ P ₁	–1.0 dB	–0.5 dB	–0.3 dB
Input ↔ P ₂	–7.0 dB	–10.5 dB	–15.3 dB
For connecting ... antennas	2		
Insertion loss	< 0.05 dB		
Impedance	50 Ω		
VSWR	694 – 2700 MHz: < 1.5		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	500 W (at 50 °C ambient temperature)		
Connector	7-16 female		
Weight	Approx. 1.3 kg		
Packing size	310 x 93 x 112 mm		
Max. size	244 / 90 / 55 mm		

Material:	Housing: Aluminum. Inner conductor: Brass.
DC capability:	DC transmission only between input and port P ₁ . P ₂ is coupled capacitively.
Mounting:	Bracked for wall mounting included in the scope of supply. For pipe mast mounting use clamps listed below (order separately).
Environmental conditions:	IP 65

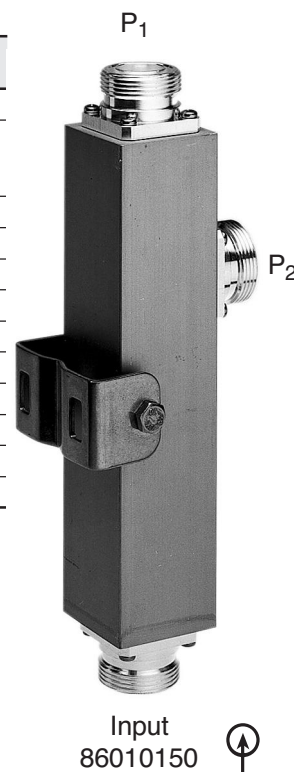

Clamps (order separately)

Type No.	Description	Remarks
734360	1 tension band	Mast: 34 – 60 mm diameter
734361	1 tension band	Mast: 60 – 80 mm diameter
734362	1 tension band	Mast: 80 – 100 mm diameter
734363	1 tension band	Mast: 100 – 120 mm diameter
734364	1 tension band	Mast: 120 – 140 mm diameter
734365	1 tension band	Mast: 45 – 125 mm diameter

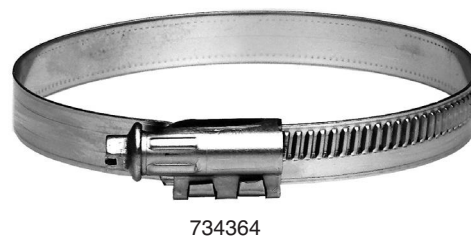

Low-loss Power Tappers

Multi-band

Continuously Adjustable

790–960 / 1710–2170

870–960 / 1710–2500

5.0 – 15.0 dB

KATHREIN

Antennen · Electronic

For indoor use.

K63236001: 2-way Tapper 790–960/1710–2170 5.0–15.0dB


86010023: 2-way Tapper 870–960/1710–2500 5.0–15.0dB

Type No.	K63236001	86010023
Frequency range	790 – 960 MHz and 1710 – 2170 MHz	870 – 960 MHz and 1710 – 2500 MHz
Power ratio between outputs ($P_2 \leftrightarrow P_1$)	–5.0 dB to –15.0 dB continuously adjustable	
For connecting ... antennas	2	
Insertion loss	< 0.1 dB	
Impedance	50 Ω	
VSWR	790 – 824 MHz: < 2.1 824 – 960 MHz: < 1.7 1710 – 2170 MHz: < 1.7	< 1.7
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power	100 W (at 50 °C ambient temperature)	
Connector	N female	
Weight	0.5 kg	
Profile cross-section	25 x 25 mm	
Packing size	249 x 111 x 40 mm	277 x 111 x 40 mm
Max. size	235 / 100 / 25 mm	263 / 100 / 25 mm

Material: Housing: Aluminum.
Inner conductor: Brass.
Adjustment mechanism: ASA.

DC capability: DC transmission only between input and port P_1 .
 P_2 is coupled capacitively.

Environmental conditions: IP 52

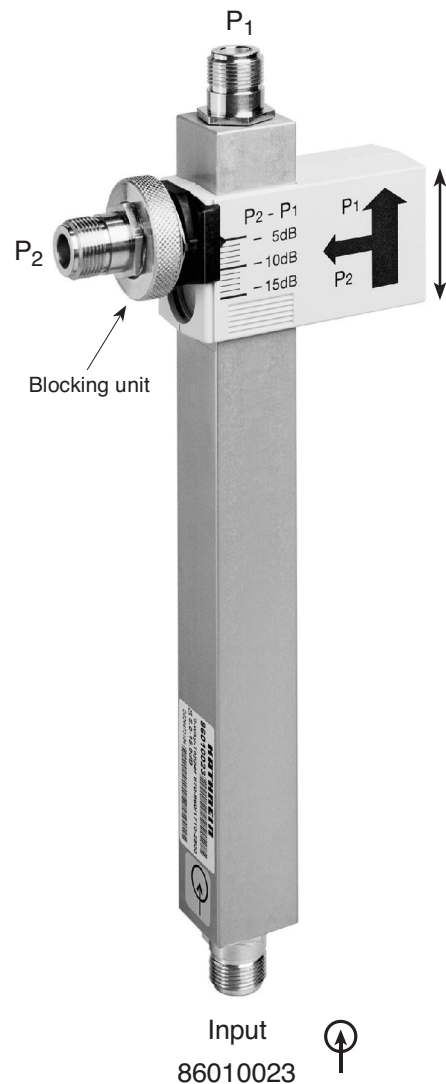

Splitting table

P_2 / P_1 [dB]	Splitting ratio P_1 / P_2	Splitting attenuation	
		P_{Input} / P_1 [dB]	P_{Input} / P_2 [dB]
–5	3.2	–1.2	–6.2
–6	4	–1.0	–7.0
–7	5	–0.8	–7.8
–8	6.3	–0.6	–8.6
–9	8	–0.5	–9.5
–10	10	–0.4	–10.4
–11	12.6	–0.3	–11.3
–12	15.8	–0.3	–12.3
–13	20	–0.2	–13.2
–14	25.1	–0.2	–14.2
–15	31.6	–0.1	–15.1

- LCD Display works in direct sunlight and with backlight in dark areas.
- Built-in synthesized RF sweeping source.
- Measured results can stored for further analysing and documentation on internal and external storage media
- Time stamp and operator ID is possible
- All in one analysing for antenna tuning and control
- FAT 2710 measures antenna, frequency, SWR and bandwidth by sweeping band of interest
- A cost-effective SWR Analyzer covering all major Cellular and mobile radio communication bands
- FAT 2710 gives you quick and reliable trouble-shooting



Specifications

Model	FAT 2710 (BN: 86817.001)
Application	Measurement of SWR in 50 Ω transmission lines
Frequency range	30->2700 MHz entered as centre and span
Center Frequency	30 to 2700 MHz.
Span	0 to 2670 MHz.
Frequency stability	± 50 ppm
Measurement range	1.0<SWR<9.9, 0<dB<-30dB
Impedance	Nom. 50 Ω
Generator output	Approx. -4dBm
Max. input on test terminal	100 mW
Tolerance on SWR reading	30-650MHz) $\pm 5\%$; 650-1450MHz $\pm 10\%$; and 1450-2700MHz $\pm 15\%$
Operating temperature range	0° C-> + 50° C
Storage temperature range	-30°C -> + 50° C
Connectors	"N"-female RF test connector. USB A type for memory key. USB B type for serial PC communication. Mini DIN for RS232 communication up to 38400 Baud
Power supply	4 NiMH type AA rechargeable batteries (Batteries, NiMH rechargeable and 230VAC/7.5VDC charger supplied)
Auto Power off NOT OK	For battery economy, FAT 2710 automatically turns off 3 min. after last entry
Normal operating use	Fully charged: More than 10 hours.
Colour	Silver/blue
Width	82 mm
Depth	31 mm
Height	165 mm
Weight	500 gram (incl. Batteries)
EMC	Complies with directive 89/336EEC as amended by 92/31EEC and 93/68/EEC
Standards	Emissions: EN 61000-6-4: 2001 Immunity: EN 61000-6-2: 2005
Accessory	Soft carrying bag with RF-adaptor set, car charging cable and two 7/16 connectors
Order Number for Accessory:	BN: 86817.101

Please contact for technical information and orders:

SCHOMANDL-Vertriebs-GmbH
Bahnhofstraße 108 · D-83224 Grassau/Germany
Telephone: 08641-403-140 · Telefax: 08641-403-264
e-mail: info@schomandl.de · Internet: <http://www.schomandl.de>

Display forward, reflected power and VSWR

2 GHz to 6 GHz

Diagnose 802.11a,b and g WLAN

Accessory:

Soft carrying bag with SMA 50 Ohm load 6 GHz, RPSMA male BN 86817.104 to SMA female Adaptor, SMA male to RPSMA, SMA male to SMA male Adaptor and special 2,4 GHz SMA Antenna



Specifications

Model No.:	86817.004
Frequency range:	2 – 6 GHz
Insertion loss:	<0.4dB
Absolute accuracy :	±1dB
Power range indicated:	1µW – 999mW
VSWR indicated:	1.01 – 9.99 : 1
Directivity:	>30dB
Peak Detect of:	<1mS pulse
Auto Power off	1 minute
Power Supply:	3Volt (2 X AAA Alkaline)
Max power consumption:	50 mA
Operating time (no backlight)	20 Hours
Optional Accessories:	SMA to RPSMA adaptors
Belt clip	Option
EMI/RFI	EN55022 /B
Dimensions:	
– Width:	58 mm
– Depth:	23 mm
– Height:	105 mm
Weight incl. Batteries:	approx. 130g
Temperature:	
– Operating	0 to 40°C
– Storage	-20 to 80°C
Colour:	
– Standard	White/Grey

Broadcast RF Power Monitor

Digital RF Power Meter



KATHREIN
Antennen · Electronic

Also available as 19" Rack mount Version:

1U Rack mount Power Monitor

including all options BN 86818.000

additional power, reflected power, VSWR calculation



Accessory:

UHF Probe 1 or 2 required BN 86818.101

VHF Probe 1 or 2 required BN 86818.102

Specifications for Broadcast Power Monitor with external coupler

Model No.:	86818.002
Frequency range: (Coupler dependent)	50 – 860 MHz
Coupling Flatness , from 6dB/octave Probes 3015,3016	±0,2dB
Absolute accuracy after offset adjustment:	±0,2dB (±4%)
True RMS Power range:	–34 dBm to +10 dBm
Peak Power range:	+24 dBm
Dynamic range:	> 50 dB
Power readout: Auto range 1KW – 999KW	1024 steps
Coupler attenuation VHF @ 100MHz:	43 dB to 73 dB
Coupler attenuation UHF @ 500MHz:	50 dB to 80 dB
VSWR readout:	1,00:1-9,99:1
Remote Temperature Sensing	0 – 99°C
Remote Voltage Sensing	0–100VDC
Remote Current Sensing	0–3V DC (1024 bits)
Relay Out/Digital Out:	Open Collector 50V/0,5A
Controller out for SNMP or dialup	RS232 1200- 9600 Bps
Power Supply: – AC power:	90-264V @ 50-60Hz
Max power consumption: – AC	10W/A
EMI/RFI	EN55022 /B
Connectors: – RF sensors – Power AC in rear Options: – Analogue/digital – RS232	DB9 Female IEC DB9 Female DB9 Male
Dimensions: – Width: 19" unit – Depth: 1HU	482.5 mm 180 mm 44 mm
Dimensions: – Width: Stand alone unit – Depth: – Height:	216 mm 180 mm 53 mm
Weight:	approx. 1.8 kg
Temperature: – Operating -Storage	5 to 50°C 20 to 80°C
Colour: – standard	Silver Anodised
Order Number for Accessory:	BN: 86817.101

Please contact for technical information and orders:

SCHOMANDL-Vertriebs-GmbH
Bahnhofstraße 108 · D-83224 Grassau/Germany
Telephone: 08641-403-140 · Telefax: 08641-403-264
e-mail: info@schomandl.de · Internet: <http://www.schomandl.de>

Monitors RF fields

Indicates RF pollution

Alarm and Silent modes

Broadband coverage

General Safety According to WHO ICNIRP

Alarm 2W/m² or 10W/m²




Specifications for Broadcast Power Monitor with external coupler

Model No.:	86817.003
Frequency range:	10 – 10000 MHz
Frequency response	ICNIRP
Absolute accuracy 400–2500MHz:	±6dB
Power range indicated:	0.1 – 100 W/m ²
Field strength indicated:	19 – 137 V/m
Dynamic range:	>30dB
Audio Alarm	80dBa
LED Alarm always enabled	15mcd
Normal Mode Audio and LED Alarm: (–)	2W/m ² – 28V/m or 10W/m ² – 137V/m
Timed Mode Silent in: (– –)	5 minutes
Audible Alarm Off Mode: (– – –)	Never
Power Supply:	3Volt (2 X AAA Alkaline)
Max power consumption no alarm:	110µA
Operating time (no Audio Alarm)	+500 Days
Belt clip included	
EMI/RFI	EN55022 /B
Dimensions:	
– Width:	58 mm
– Depth:	23 mm
– Height:	105 mm
Weight incl. Batteries:	approx. 88g
Temperature:	
– Operating	–10 to 40°C
– Storage	–20 to 80°C
Colour:	
– Standard	Black/Grey


	Page
Mounting Configurations	202
Dimensions of Panels	203
Colour Coding for Connectors on outdoor Base Station Antennas	204
Modified Product Line of Mounting Parts	205
Amount of needed Clamps per Panel Type	206
Clamps	207
Downtilt kit “L”	208
Downtilt kit “L” and “M”	209
Downtilt kit “H”	210
Azimuth Adjustment Kits	211
3 Sector Clamps	212
Offset	213
2x Panel Mounting Kit	214
Tension Band	216
Side-mounting Clamp Omnis	217
Azimuth Adjustment Tool	220
Installation Tool Triple-band Antennas	221

The hereinafter referred to “wind load category L - M - H” correspond to the defined “category of mounting hardware” given in the respective data sheets.


Small Pipe Diameter




Large Pipe Diameter




Off-set

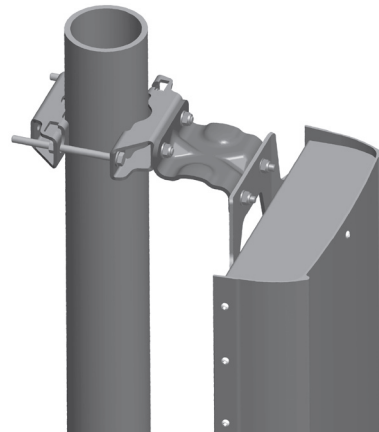


Flat Surface

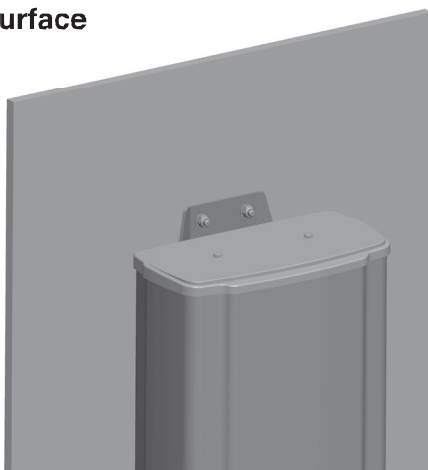


Standard Downtilt

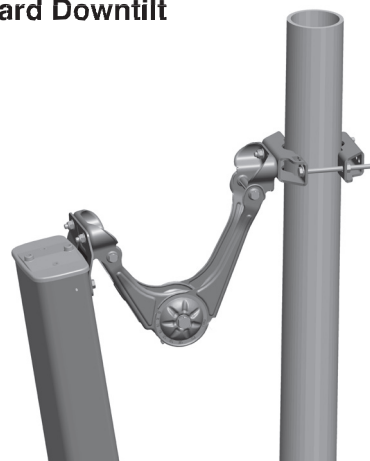

Off-set Downtilt

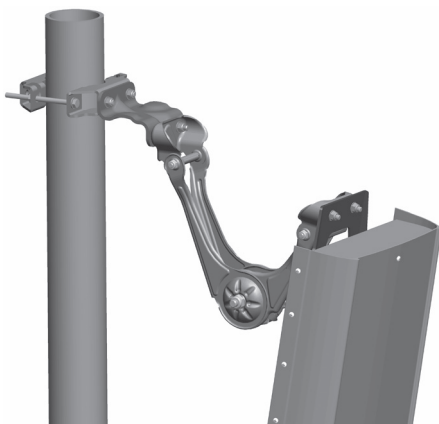


Azimuth

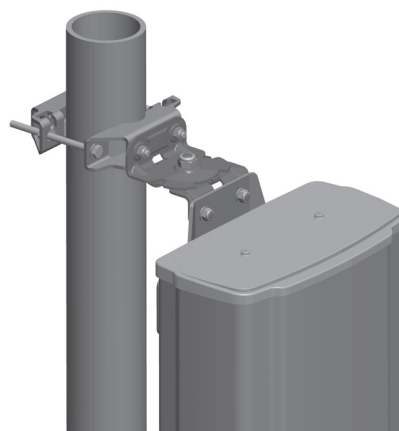












Antenna dimensions and detailed connector position can be found on our current data sheets. Please refer to the information on page 2 of our latest data sheets which are available on our homepage:

www.kathrein.de
– Base station system products
– Product search

An example is shown below of how the antenna dimensions are displayed on our data sheets:





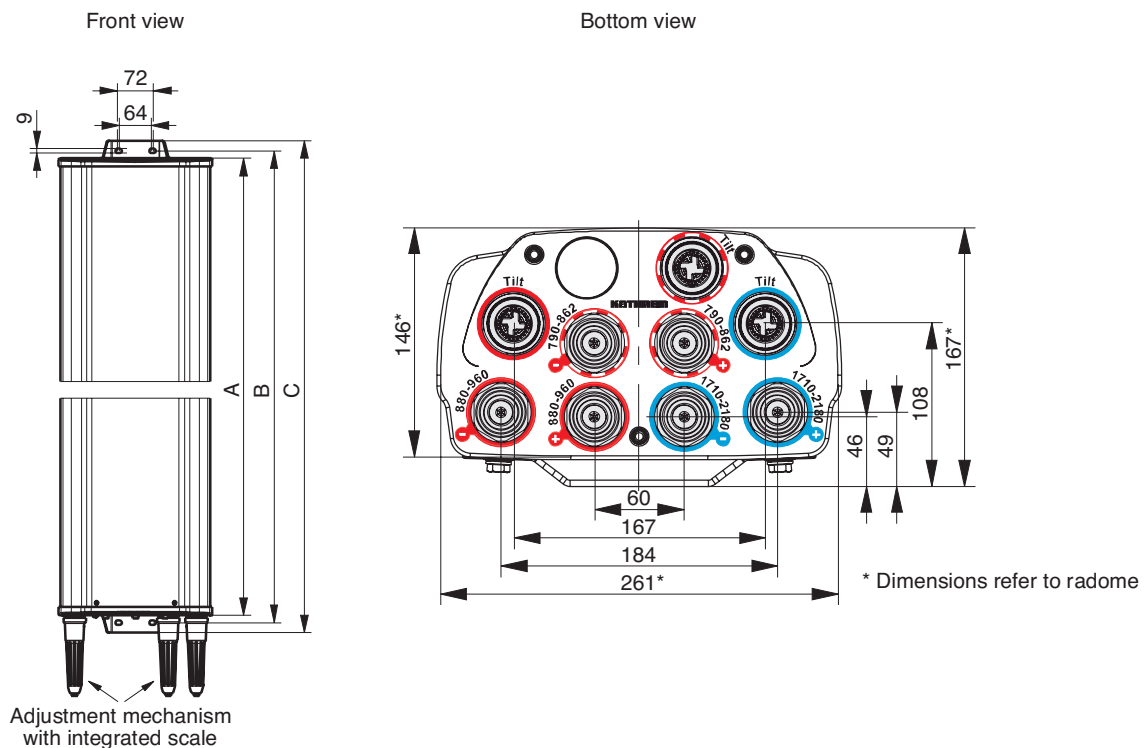


Colour Coding for Connectors on outdoor Base Station Antennas

	First coding	Second coding	Third coding
Frequency range (MHz)	Frequency range is not divided	Frequency range is split into 2 bandwidths or 2 separate systems within same frequency range	Frequency range is split into 3 bandwidths or 3 separate systems within same frequency range
Low band 694 ... 960	Base colour Red Continuous line	 Broken line	 Dotted line
High-band 1710 ... 2200	Base colour Blue Continuous line	 Broken line	 Dotted line
incl. LTE 2.6 1710 ... 2690	Base colour Yellow Continuous line	 Broken line	 Dotted line
Dual-band antenna	Dual-band filterantenna // 2.6 GHz  Standard Dual-band 800 MHz // 2.6 GHz  Standard Dual-band 800 MHz // 2.6 GHz Combiner Version  Dual-band 800 MHz // 2.6 GHz 	Side-by-side 900 // 900 MHz  Side-by-side 800 // 900 MHz 	not available
Triple-band antenna	Filterantenna Triple-band 900 MHz // 2 // 2.6 GHz 	Filterantenna Triple-band 800 // 900 MHz // 2 GHz  Stacked Triple-band 900 MHz // 2.6 // 2.6 GHz 	Triple-band 2.6 // 2.6 // 2.6 GHz 
Quad-band antenna	not available	Filterantenna Quad-band 800 // 1800 MHz // 2 // 2.6 GHz  Quad-band 800 // 1800 MHz // 2 // 2.6 GHz	no example available yet


Modified Product Line of Mounting Parts

KATHREIN
Antennen · Electronic

Type	Windload Classification	Pole Diameter in mm	Type No.	Remark
Clamp 	light / medium	Ø 28 – 64	731651	Modified product
	light / medium / heavy	Ø 42 – 115	738546	
	light / medium / heavy	Ø 110 – 220	85010002	
		Ø 210 – 380	85010003	
Downtilt kit 	light		732317	Modified product
			732318	
			732321	
			732322	
			732327	
Downtilt kit 	light / medium		737971	Modified product
			737972	
			737973	
			737974	
			737975	
			737976	
			737977	
			737978	
Downtilt kit 	heavy	New product	85010008	Replacement for 85010007
Azimuth Adjustment Kit 	light / medium		85010014	Pole mounting adjustment angle ±30° (additional clamp needed)
	heavy		85010015	
Azimuth Adjustment Kit 	light / medium		85010016	Wall mounting adjustment angle ±30°
	heavy		85010017	
3 Sector Clamp 	light / medium	Ø 88.9	742263	New product
		Ø 88.9	742317	
		Ø 114.3	742033	
		Ø 139.7	742034	
	heavy	Ø 114.3	85010058	New product
		Ø 139.7	85010059	New product
Offset 	light / medium	New product	85010060	Clearance between pole and antenna (additional clamp needed)
	heavy	New product	85010061	
2x Panel Mounting Kit 	light / medium		742113	Additional clamp needed
	heavy		85010006	
Tension Band 	light	Ø 34 – 60	734360	Please note: Only usable without downtilt kit
		Ø 60 – 80	734361	
		Ø 80 – 100	734362	
		Ø 100 – 120	734363	
		Ø 120 – 140	734364	
		Ø 45 – 125	734365	


VPol 800/900
All other Panels

2 pcs

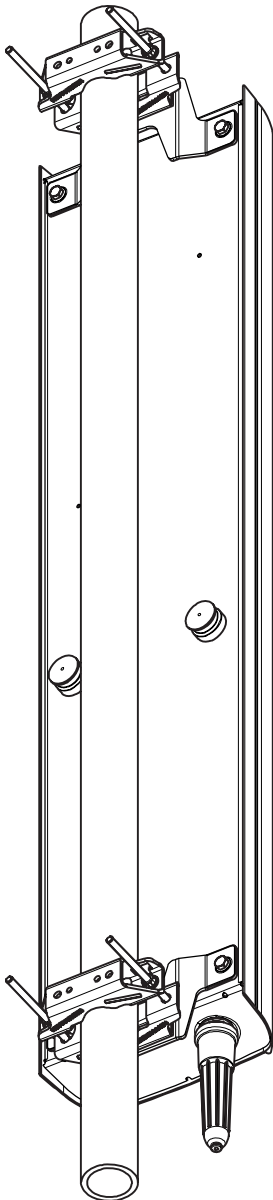

VPol 800/900
Antenna height: 264 mm

1 pc

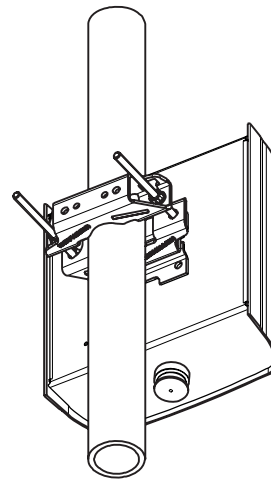


Panel Accessories

Mounting Hardware

Clamps

Clamps

Type No.	731651	738546	85010002	85010003
Suitable for mast diameter	28 – 60 mm	42 – 115 mm	110 – 220 mm	210 – 380 mm
Antenna – mast distance F	25 – 28 mm	20 – 26 mm	47 – 55 mm	48 – 68 mm
Number of pieces	1 clamp	1 clamp	1 clamp	1 clamp
Material – Clamp	Hot-dip galvanized steel	Hot-dip galvanized steel	Hot-dip galvanized steel	Hot-dip galvanized steel
– Screws	Hot-dip galvanized steel/ Stainless steel	Hot-dip galvanized steel/ Stainless steel	Hot-dip galvanized steel/ Stainless steel	Stainless steel/ Stainless steel
– Nuts	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Weight	0.8 kg	1.1 kg	2.7 kg	4.8 kg

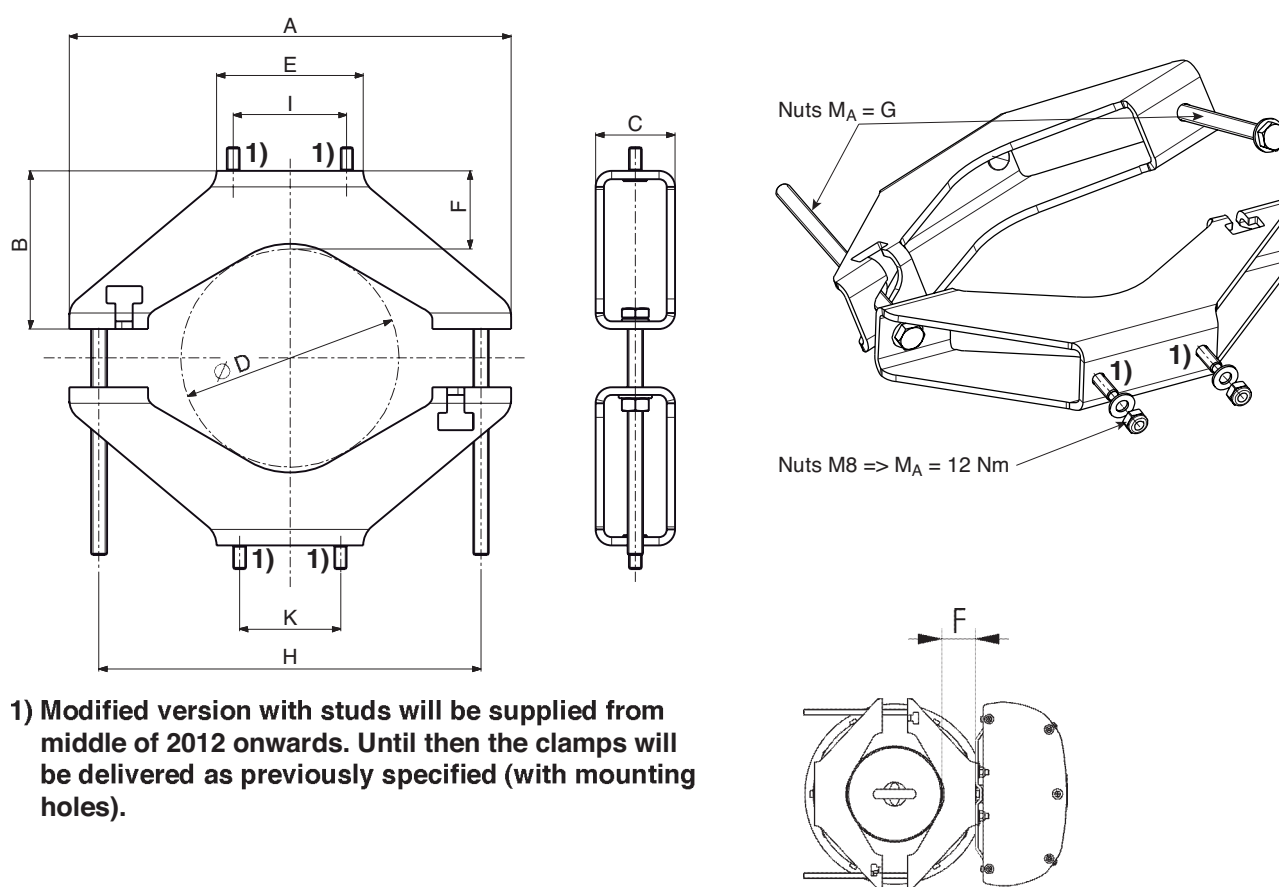


Type No.	A	B	C	D	E	F	G	H	I	K
731651	116 mm	40 mm	40 mm	28 – 60 mm	93 mm	25 – 28 mm	20 Nm	84 mm	–	64 mm
738546	152 mm	40 mm	40 mm	42 – 115 mm	93 mm	20 – 26 mm	25 Nm	125 mm	72 mm	64 mm
85010002	280 mm	100 mm	50 mm	110 – 220 mm	93 mm	47 – 55 mm	35 Nm	240 mm	72 mm	64 mm
85010003	442 mm	150 mm	50 mm	210 – 380 mm	150 mm	48 – 68 mm	35 Nm	392 mm	72 mm	64 mm

**Please note: Kathrein does not recommend to use counter nuts.
The additional nuts supplied are only meant as spares.**

Standard Downtilt kit for Panel Antennas (Wind load Category “L”)

Antenna height: 502 mm
662 mm
982 mm
1302 mm

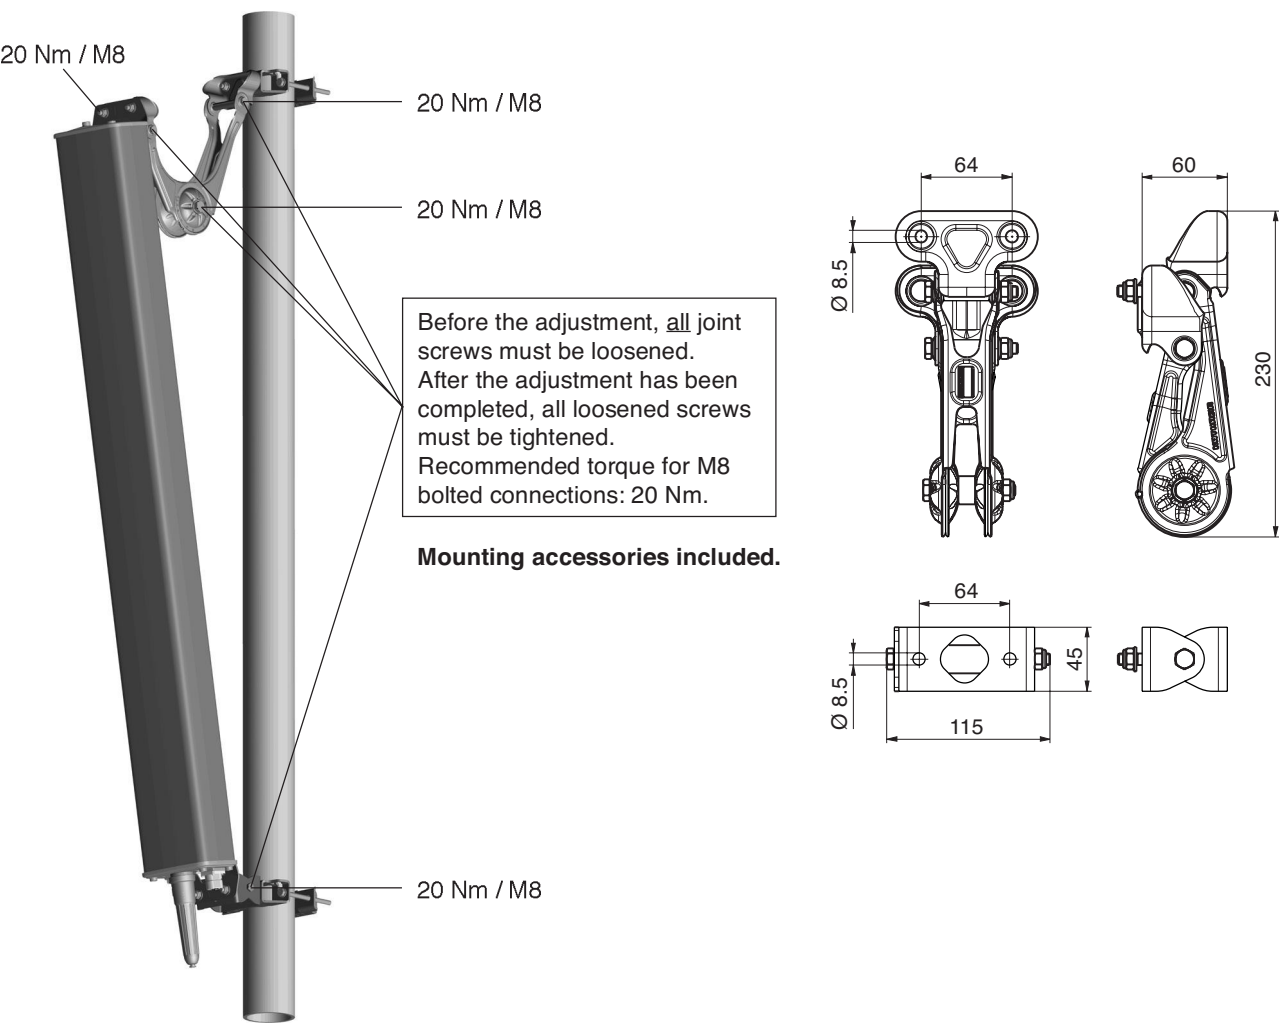

For heights not mentioned in this table please use downtilt kit 732327.

Downtilt angle		Downtilt kit with scale	Downtilt kit without scale*		
Antenna height	Downtilt angle	Type No.	Type No.	Weight	Material
502 mm	0° – 25°	732322	732327	Approx. 1.3 kg	All parts: Hot-dip galvanized steel Nuts / washers: Stainless steel
662 mm	0° – 19°	732321			
982 mm	0° – 13°	732318			
1302 mm	0° – 10°	732317			



* Instructions to adjust the required downtilt angle are given in the datasheet or on the rearside of the antenna.

Mounting a downtilt kit enlarges the spacing between mast and antenna by 42 mm.

Standard Downtilt kit for Panel Antennas (Wind load Category “L” and “M”)

KATHREIN
Antennen · Electronic

Antenna height: 654 – 735 mm
974 – 1032 mm
1294 – 1306 mm
1934 – 1946 mm
2254 / 2256 mm
2574 – 2582 mm

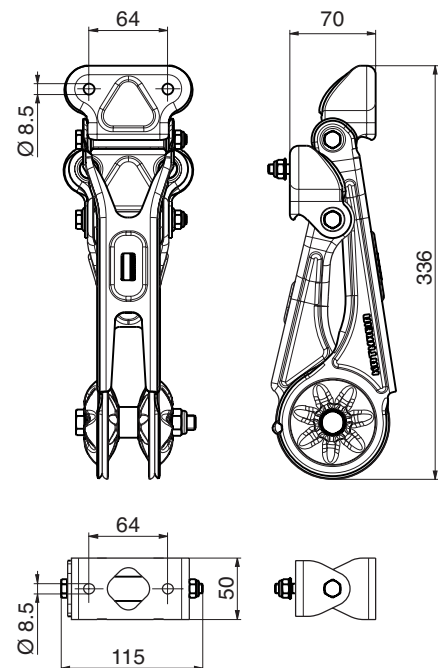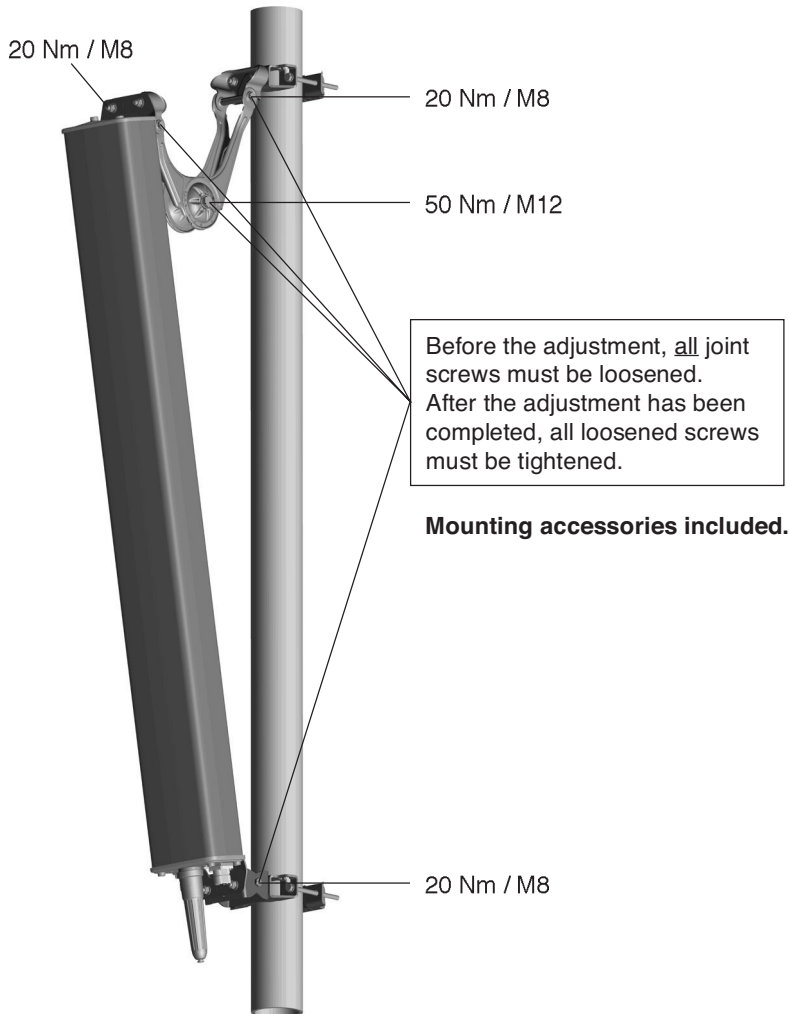

For heights not mentioned in this table please use downtilt kit 737978.

Downtilt angle		Downtilt kit with scale	Downtilt kit without scale*	Weight	Material
Antenna height	Downtilt angle	Type No.	Type No.		
654 – 735 mm	0° – 30°	737972	737978	Approx. 2.3 kg	All parts: Hot-dip galvanized steel Nuts / washers: Stainless steel
974 – 1032 mm	0° – 21°	737973			
1294 – 1306 mm	0° – 16°	737974			
1934 – 1946 mm	0° – 11°	737975			
2254 / 2256 mm	0° – 9°	737977			
2574 – 2582 mm	0° – 8°	737971			

* Instructions to adjust the required downtilt angle are given in the datasheet or on the rearside of the antenna.

Mounting a downtilt kit enlarges the spacing between mast and antenna by 84 mm.


Use the downtilt kit together with the clamps Type No. 731651, 738546, 85010002, 85010003, 85010014 for pole mounting and 85010016 for wall mounting.

Standard Downtilt kit for Panel Antennas (Wind load Category “H”)

Special downtilt kit for Panel antennas with a higher wind load.

Downtilt kit

Type No.	85010008
Preferred range of use	– Panel antennas with a higher wind load – Panel antennas with attached mounting plates – Downtilt kit without scale for universal use
Weight	6.5 kg
Material	Hot-dip galvanized steel
Screws	Hot-dip galvanized steel / stainless steel
Nuts	Stainless steel

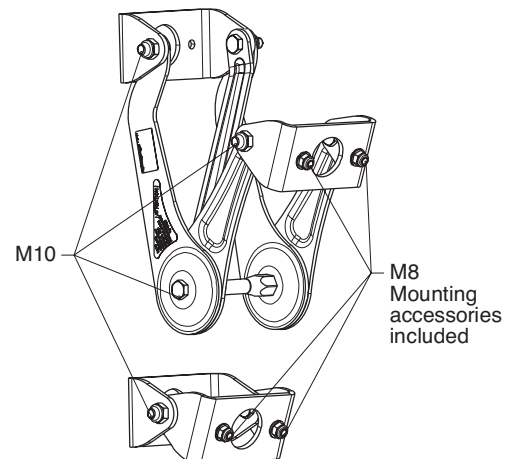

Recommended mast clamps:

Type No.	Description	Mast diameter	Weight approx.	Units per antenna
738546	1 clamp	42 – 115 mm	1.1 kg	2
85010002	1 clamp	110 – 220 mm	2.9 kg	2
85010003	1 clamp	210 – 380 mm	4.8 kg	2

Recommended torque for all bolted connections:


Screw size	Torque
M8	20 Nm
M10	50 Nm

Maximum acceptable load:

Frontal wind load	< 5000 N
Lateral wind load	< 1300 N

Downtilt angle

Antenna height	Downtilt angle
1498 mm	0° – 13°
2058 mm	0° – 10°
2516 mm	0° – 8°
2628 mm	0° – 8°




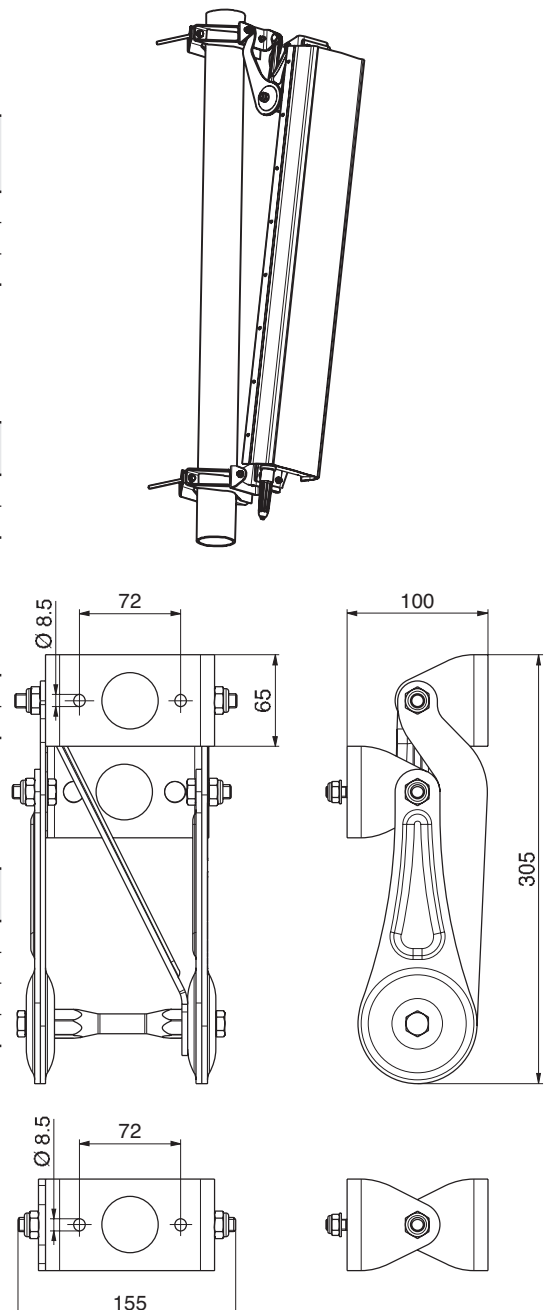


All Panels

Mounting Hardware

Azimuth Adjustment Kits

KATHREIN
Antennen · Electronic

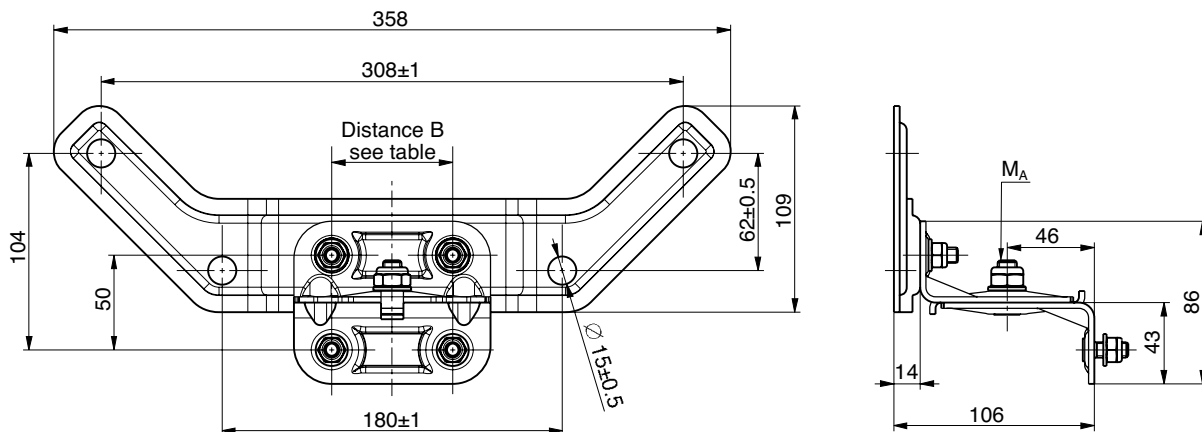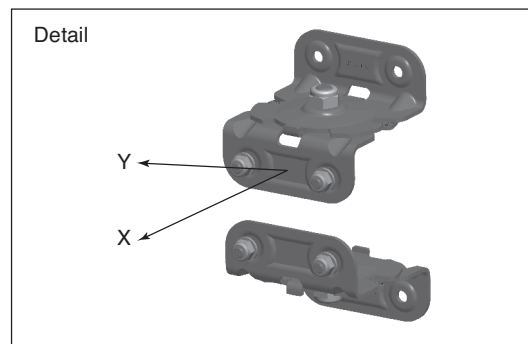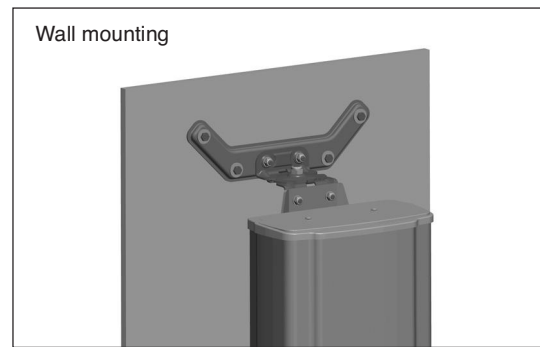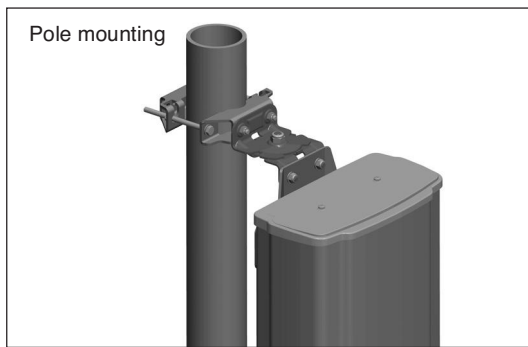

The azimuth adjustment kit for pole mounting can be mounted with all suitable clamps, 3-Sector clamps and 2x A-/C-/F-Panel mounting kits (with the latter only as an interface between mounting kit and antenna).

Type No.	85010014	85010015	85010016	85010017
Suitable for	pole mounting		wall mounting	
Number of pieces	2 brackets	2 brackets	2 brackets	2 brackets
Distance between screws [B]	64 mm	72 mm	64 mm	72 mm
Angular range	± 30°		± 30°	
Weight / kit	approx. 1260 g	approx. 1260 g	approx. 2500 g	approx. 2500 g
Supplied mounting accessories	all screws		Screws and dowels for wall fastening are not supplied, they must be chosen by installer according to on-site requirements.	
	Adapter for downtilt kit 7323xx series		Adapter for downtilt kit 7323xx series	
Materials	Parts are hot-dip galvanized steel; Captive nuts are stainless steel			
Max. permissible static load / kit				
– X direction	2150 N	5100 N	2150 N	5100 N
– Y direction	760 N	1350 N	760 N	1350 N

Recommended torque: Screws M6: 8 Nm; Screws M8: 20 Nm; MoS₂ greased.
Minimum torque MA: 30 Nm; MoS₂ greased

3 Sector Panel Arrangement

3 Sector Clamp Kit





Mounting Hardware

KATHREIN
Antennen · Electronic

- Slim and unobtrusive design.
- Nearly cylindrical optical appearance with small outer diameter.
- Suitable for all Panels with an antenna housing width less than 400 mm (H_{max}).

Please note:

Panels with connector position “Rearside” fit only with downtilt kit azimuth adjustment kit or offset mounted in-between.

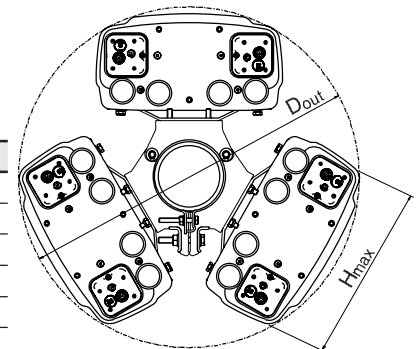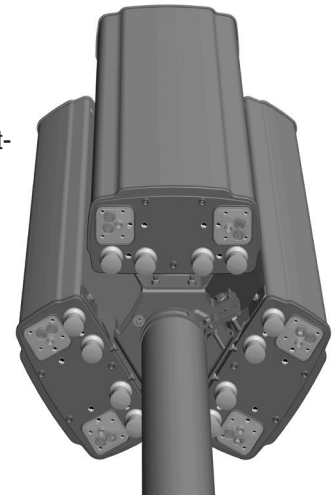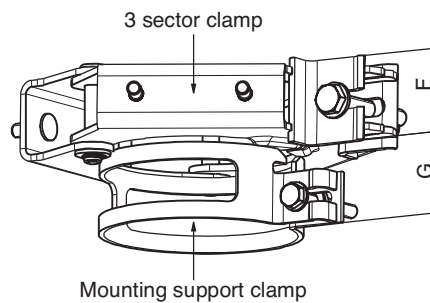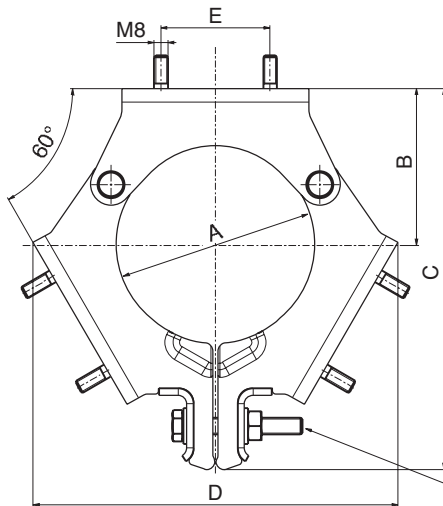

Type No.	A	B	C	D	E	F	G	H_{max}	Weight
742263	88.9	65	180	168	64	50	45	280	4 kg
742317	88.9	88	213	199	64	50	45	361	4 kg
742033	114.3	92	217	207	64	50	45	375	4 kg
742034	139.7	100	236	228	64	50	45	400	4 kg
85010058	114.3	92	217	207	72	50	45	375	4 kg
85010059	139.7	100	236	228	72	50	45	400	4 kg

All dimensions in mm.

D_{out} is determined by mounted components.

3 Sector Clamp Kit (Antenna Wind load Category “L” and “M”)

Type No.	742263	742317	742033	742034
Angle between antennas	120°	120°	120°	120°
Suitable for mast diameter	88.9 mm	88.9 mm	114.3 mm	139.7 mm
Number of pieces	2 x 3 sector clamp 2 x mounting support clamp	2 x 3 sector clamp 2 x mounting support clamp	2 x 3 sector clamp 2 x mounting support clamp	2 x 3 sector clamp 2 x mounting support clamp
Material				
– 3 sector clamp	Hot-dip galvanized steel	Hot-dip galvanized steel	Hot-dip galvanized steel	Hot-dip galvanized steel
– Mounting support clamp	Aluminum	Aluminum	Aluminum	Aluminum
– Screws	Hot-dip galvanized steel	Hot-dip galvanized steel	Hot-dip galvanized steel	Hot-dip galvanized steel
– Nuts	Stainless steel	Stainless steel	Stainless steel	Stainless steel

3 Sector Clamp Kit (Antenna Wind load Category “H”)

Type No.	85010058	85010059
Angle between antennas	120°	120°
Suitable for mast diameter	114.3 mm	139.7 mm
Number of pieces	2 x 3 sector clamp 2 x mounting support clamp	2 x 3 sector clamp 2 x mounting support clamp
Material		
– 3 sector clamp	Hot-dip galvanized steel	Hot-dip galvanized steel
– Mounting support clamp	Aluminum	Aluminum
– Screws	Hot-dip galvanized steel	Hot-dip galvanized steel
– Nuts	Stainless steel	Stainless steel



Mounting Hardware Offset for Panel Antennas

KATHREIN
Antennen · Electronic

Type No.	85010060	85010061
Wind load category	"L" and "M"	"H"
Quantity needed per antenna	2 x spacer	
Material: – spacer – nuts	Hot-dip galvanized steel Stainless steel	
Dimension "A"	64 mm	72 mm
Weight	0.65 kg	
Scope of supply	1 x spacer, Fitting accessories	

Recommended torque for M8 bolted connections: 20 Nm

Please use the offset in combination with clamps corresponding to the pole diameter.

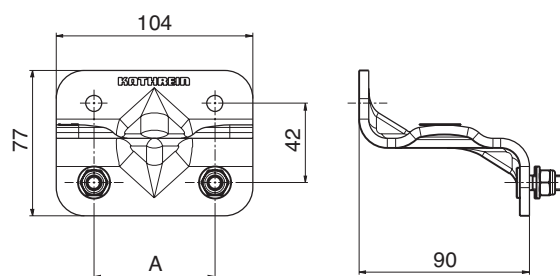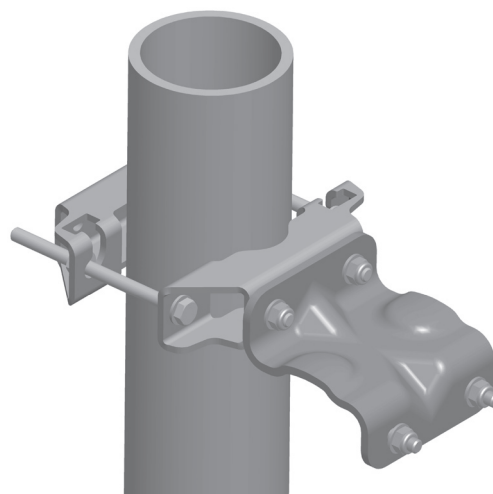

Mounting accessories (order separately)

Possible clamps in combination with:

85010060

Type No.	Description	Mast diameter	Weight approx.	Units per antenna
731651	1 clamp	28 – 64 mm	0.8 kg	2
738546	1 clamp	42 – 115 mm	1.1 kg	2
85010002	1 clamp	110 – 220 mm	2.9 kg	2
85010003	1 clamp	210 – 380 mm	4.8 kg	2
742263	2 x 3 sector clamp	88.9 mm	4.0 kg	1
742317	2 x 3 sector clamp	88.9 mm	4.0 kg	1
742033	2 x 3 sector clamp	114.3 mm	4.0 kg	1
742034	2 x 3 sector clamp	139.7 mm	4.0 kg	1

85010061

Type No.	Description	Mast diameter	Weight approx.	Units per antenna
738546	1 clamp	42 – 115 mm	1.1 kg	2
85010002	1 clamp	110 – 220 mm	2.9 kg	2
85010003	1 clamp	210 – 380 mm	4.8 kg	2
85010058	2 x 3 sector clamp	114.3 mm	4.0 kg	1
85010059	2 x 3 sector clamp	139.7 mm	4.0 kg	1

If a downtilt kit is used, please choose the fitting one from the antenna data sheet.

Panel Accessories

2 x Panel Mounting Kit

for Panels width 112 mm and 155 mm



KATHREIN
Antennen · Electronic

Use this mounting kit only for Panels with
a maximum width of 160 mm.
Wind load category: L (Light) or M (Medium)

2 x Panel Mounting Kit

Type No.	742113
Contents	2 x brackets and mounting accessories
Material: – Clamp and screws – Nuts and washers	Hot-dip galvanized steel Stainless steel
Weight	Approx. 1.6 kg

Recommended torque for M8 bolted connections: 20 Nm

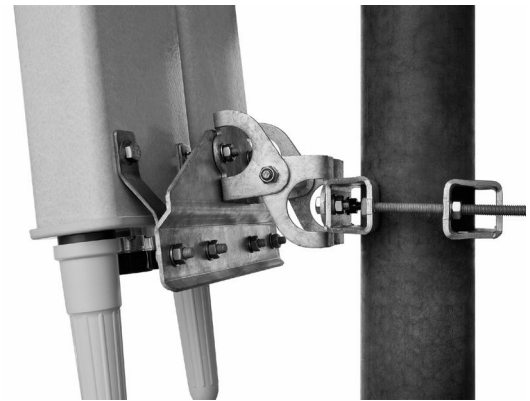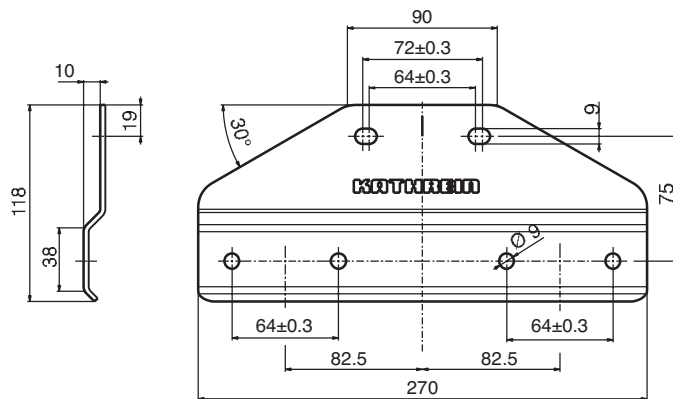

Configuration <u>without</u> mechanical downtilt	Configuration <u>with</u> mechanical downtilt

Use the 2 x Panel Mounting Kit
together with the following mounting accessories

Type No.	Description	Remarks	Weight approx.	Units per antenna
731651	1 clamp	Mast: 28 – 60 mm diameter	0.8 kg	2
738546	1 clamp	Mast: 42 – 115 mm diameter	1.1 kg	2
85010002	1 clamp	Mast: 110 – 220 mm diameter	2.7 kg	2
85010003	1 clamp	Mast: 210 – 380 mm diameter	4.8 kg	2
85010060	1 offset	in combination with the clamps	1.3 kg	2
737978	1 downtilt kit	Downtilt angle: depending on antenna height	2.3 kg	1

For a three sector panel arrangement,
use the mounting kit type no. 742113
together with the three sector clamp
742213, 742033 or 742034.
Three sector clamp 742263 does not
match.

If a downtilt kit is used, please choose the fitting one from the antenna
datasheet.

Panels VPol / XPol 800/900



Panels XXPoI 800/900 / 1800/2000

2 x Panel Mounting Kit

Use this mounting kit only for Panels with
a maximum width of 262 mm.
Wind load category: H (Heavy)

Type No.	85010006
Contents	2 x brackets and mounting accessories
Material: – Clamp and screws – Nuts and washers	Hot-dip galvanized steel Stainless steel
Weight	Approx. 3.3 kg

Recommended torque for M8 bolted connections: 20 Nm

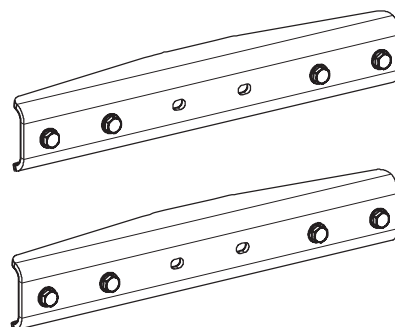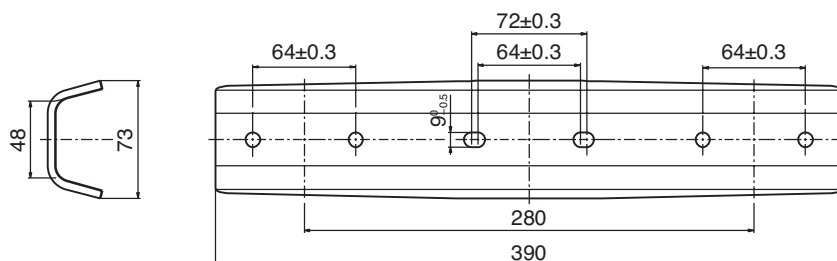

Configuration <u>without</u> mechanical downtilt	Configuration <u>with</u> mechanical downtilt

Mounting Accessories (order separately)

Clamps (only the listed clamps are allowed!)

Type No.	Description	Remarks	Weight approx.	Units per antenna
85010002	1 clamp	Mast: 110 – 220 mm diameter	2.7 kg	2
85010003	1 clamp	Mast: 210 – 380 mm diameter	4.8 kg	2
85010061	1 offset	in combination with the clamps	1.3 kg	2


If a downtilt kit is used, please choose the fitting one from the antenna datasheet.

Mounting Hardware

Tension Band for Panel Antennas

(Wind load Category “L”)

Type No.	734360	734361	734362	734363	734364	734365
Suitable for mast diameter	34 – 60 mm	60 – 80 mm	80 – 100 mm	100 – 120 mm	120 – 140 mm	45 – 125 mm
Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Weight (approx.)	0.06 kg	0.07 kg	0.08 kg	0.09 kg	0.11 kg	0.08 kg

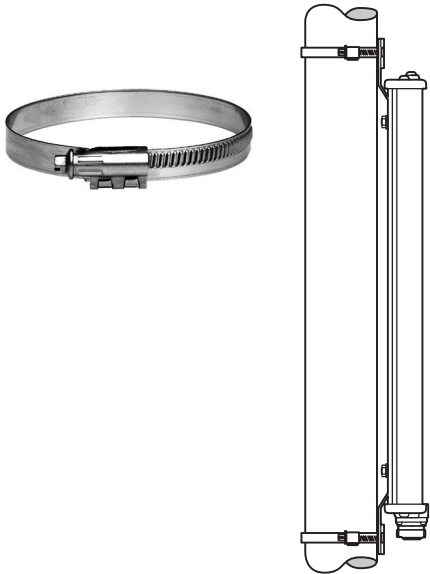


Please note:
Only usable without downtilt kit!

Side-mounting Clamp Omnidirectional Antennas Large Pipe

KATHREIN
Antennen · Electronic

Type No. 738908


For masts of 94 – 125 mm diameter

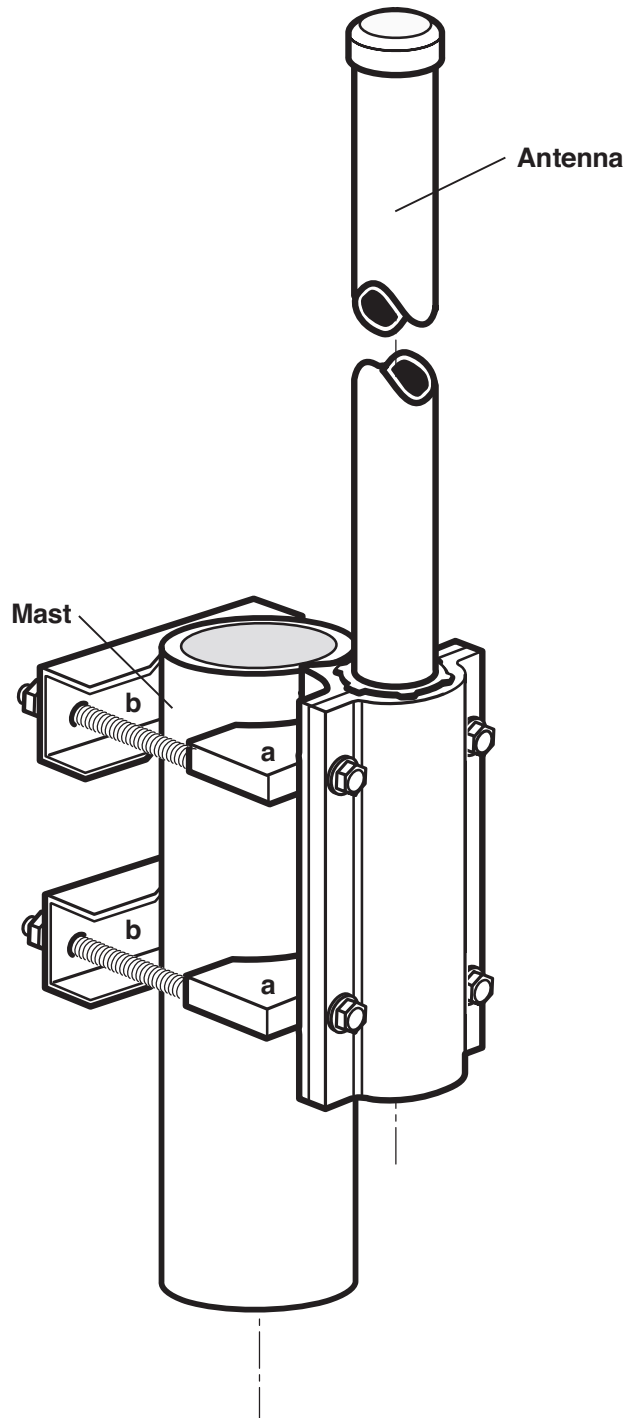








Side-mounting Bracket Omnidirectional Antennas

Type No. 737398
 Side-mounted bracket
 (for mast diameters of 40 – 105 mm)

Type No.	737398			
Bracket	At the bottom only			
Fits for antenna type no.	800/900 MHz 736347 736348 736349 736350 736351 738664 738192	1800 MHz 739785 738187 739404 737190	UMTS 741790	Dual-band 80010274

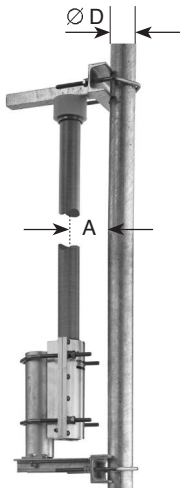

Side-mounting is possible for four fixed distances between the tubular mast and the antenna:

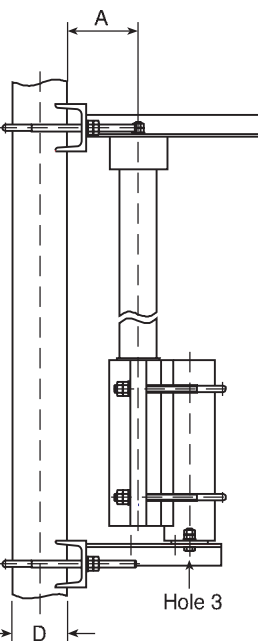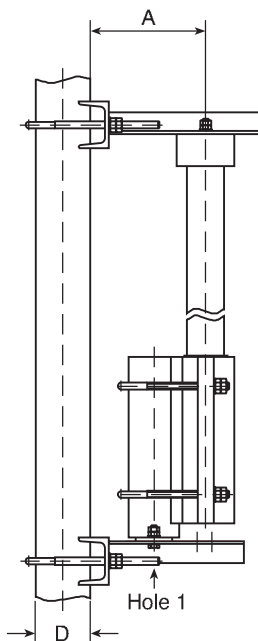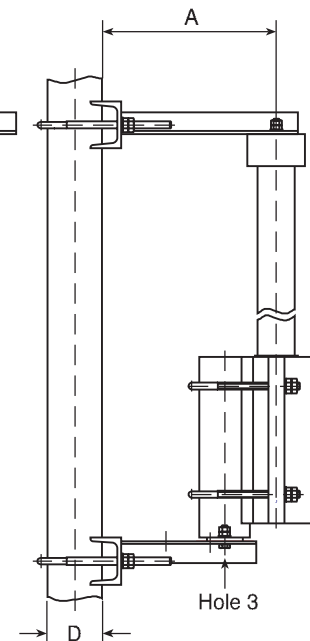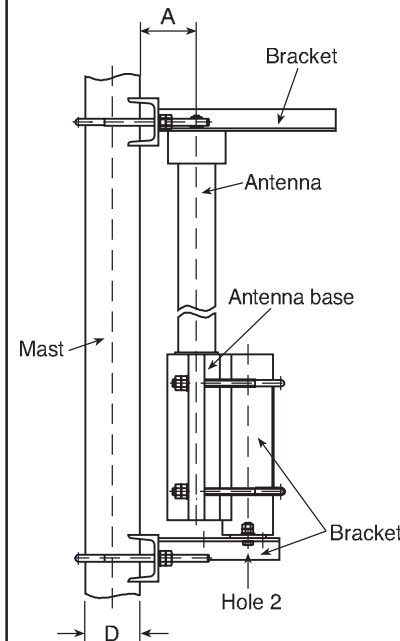800/900 MHz (holes 1 and 3)			1800/2000 MHz (hole 2)								
A = 100 mm = 0.3 λ  Hole 3			A = 160 mm = 0.5 λ  Hole 1			A = 240 mm = 0.75 λ  Hole 3			A = 80 mm = 0.5 λ  Mast Bracket Antenna Antenna base Hole 2		
Pipe D	Horizontal Radiation Pattern	Spacing A Curve	Pipe D	Horizontal Radiation Pattern	Spacing A Curve	Pipe D Curve	Horizontal Radiation Pattern	Spacing A			
40 mm		100 mm	40 mm		100 mm	40 mm		80 mm			
		160 mm			160 mm						
		240 mm			240 mm						
direction from mast to antenna →			direction from mast to antenna →			direction from mast to antenna →					



Side-mounting Brackets Omnidirectional Antennas 900


For mast diameters of 40 – 105 mm

Type No.	K61335
Bracket	At the bottom only
Fits for antenna type no.	K75116.. K75156..

Side mounting is possible for three fixed distances between the tubular mast and the antenna:

100 mm = 0.3 λ
 160 mm = 0.5 λ
 240 mm = 0.75 λ

Pipe D	Horizontal Radiation Pattern	Spacing A Curve	Additional gain to the nominal value of the antenna gain
40 mm		100 mm	2 dB
		160 mm	3 dB
		240 mm	2 dB
100 mm		100 mm	2.5 dB
		160 mm	3.5 dB
		240 mm	2.5 dB

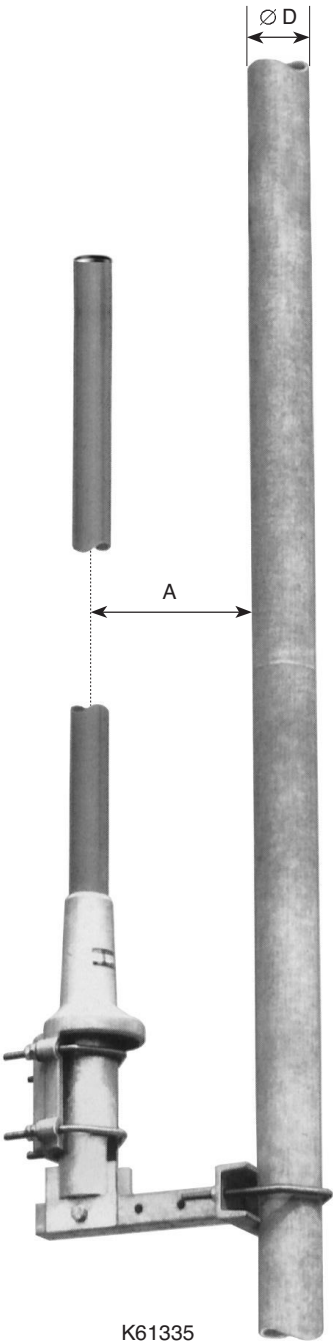


All Panels Accessories Azimuth Adjustment Tool

KATHREIN
Antennen · Electronic

Type No. 738440

Precise azimuth adjustment for mast mounted antennas can easily be achieved by using the azimuth adjustment tool.

This tool is suitable to all types of Panels and Tri-Sector Pipe Antennas with a maximum width of 315 mm.

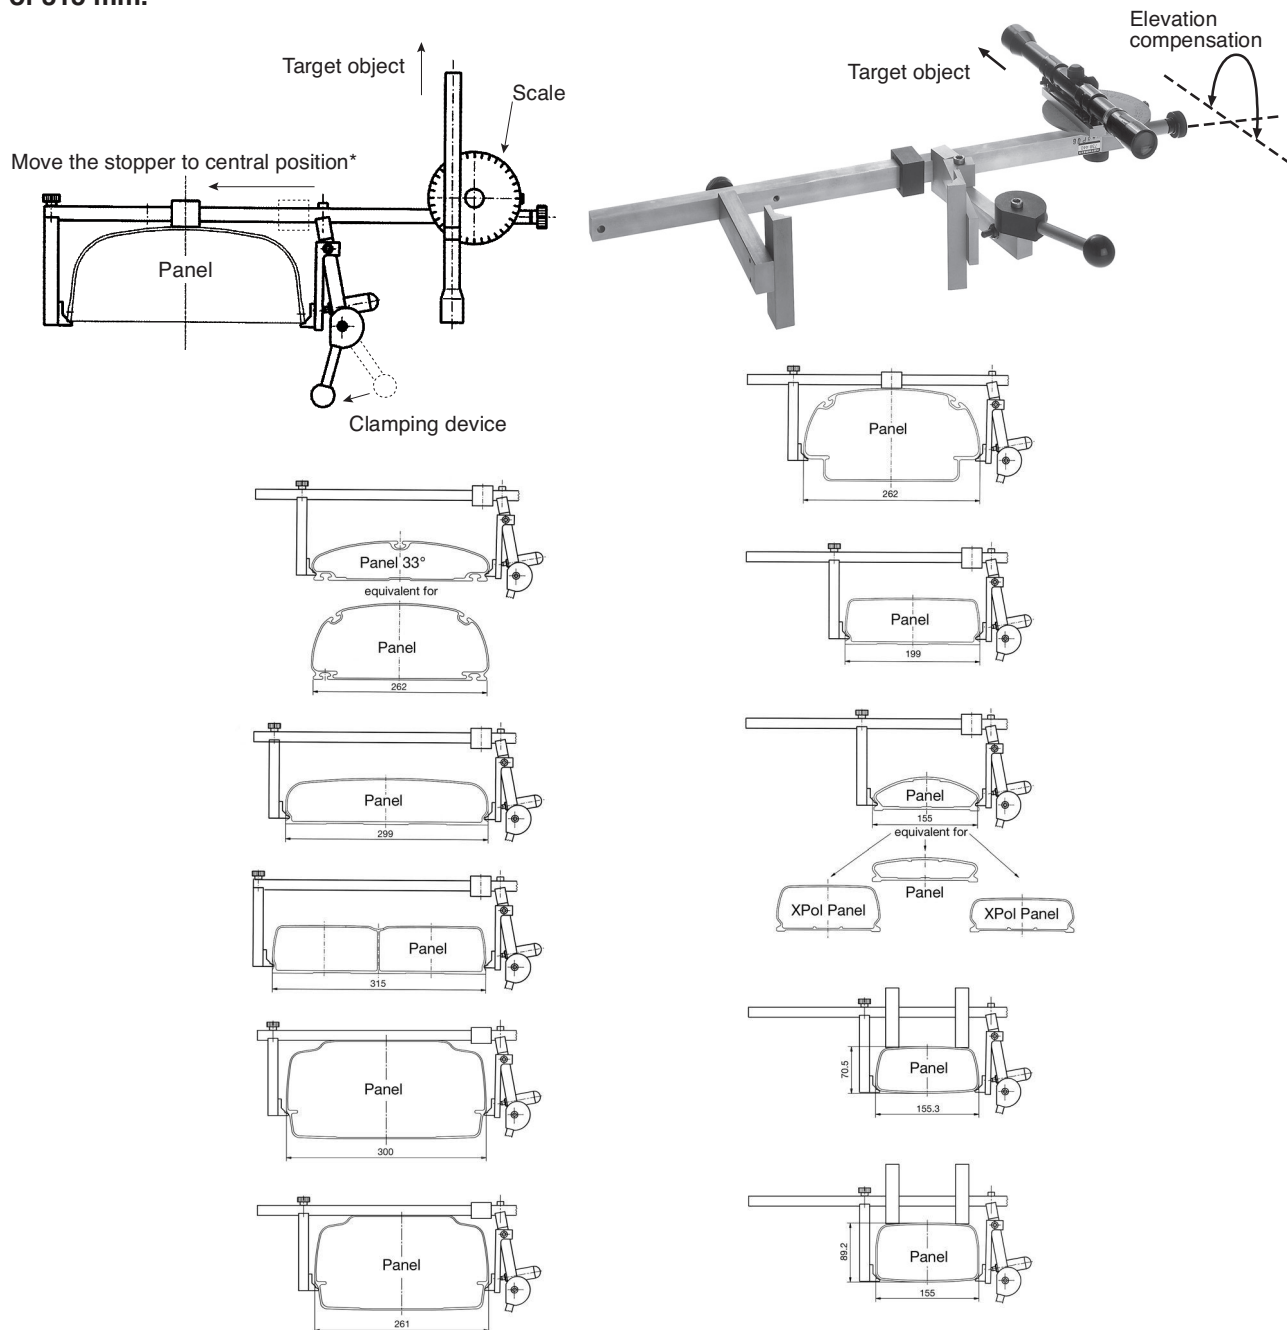

Instruction:

- Use a map to work out the angle between the designed antenna azimuth and target (church, building, mountain peak).
- Set this angle on the scale of the adjustment tool.
- Place the adjustment tool onto the antenna and tighten the clamping device.
- Use the telescope to aim at the target object, if necessary, use elevation compensation.
- Then rotate the antenna until the target object appears in the telescope.

* Observe the position of the stopper when fitting the azimuth adjustment tool.

Kathrein Installation Tool for Triple-band Antennas Type No. 85010005


KATHREIN
Antennen · Electronic

Please note: To avoid any damage to the interfaces, please ensure that only suitable tools are used. To tighten the feederline connector interfaces, we strongly recommend using a special Kathrein installation tool (as shown below) in combination with a standard torque-wrench.

Kathrein installation set: Type No. 85010005

Set has to be ordered separately!


Set consists of two spanners of 27 and 32 mm width.

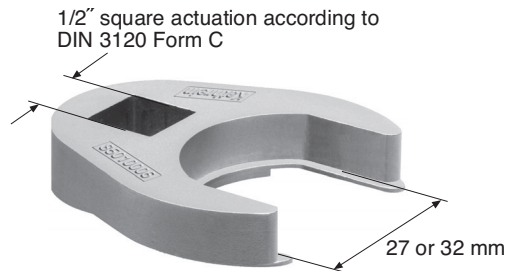

These tools are suitable for 7-16 connectors with a wrench size of 27 or 32 mm.

Tighten nut within a torque range of 25 – 33 Nm depending on connector manufacturers' specifications.

Description of connector arrangement:

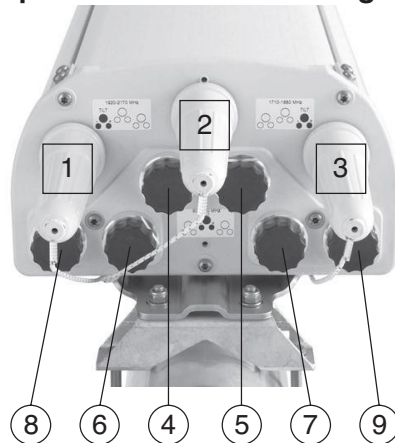

Adjustment mechanisms (1 – 3)

Feederline connectors (4 – 9)

There are six feederline connectors and three adjustment mechanisms located at the bottom of the antenna.

For detailed information about feederline installation for Triple-band Antennas please see Kathrein RET system brochure.

Part 2:

Filters, Combiners and Amplifiers for Mobile Communications