



Product Specification

Integrating Vibration Meters – Types 2513 and 2516

An accurate, cost-effective solution for machine vibration monitoring. Complete set includes accelerometer, cable, vibration meter, mounting magnet and a document folder (2513 is graduated in metric units, and the 2516 in g's and in/s).

Features

- Type 4384 Piezoelectric Accelerometer and cable is supplied but other accelerometers can be used
- AC output for data storage, display and processing
- DB and engineering unit display
- 41 LEDs gives up to 6% resolution (brightness can be adjusted)
- Acceleration vibration ranges cover from 1 to 1000 m/s² (2513), 0.1 to 100 g (2516)
- Velocity vibration ranges from 0.1 to 100 mm/s (2513), 0.01 to 10 in/s (2516)
- True peak, Max-peak, RMS and Max-RMS indication of vibration for acceleration or velocity (1 s time constant)
- Electronic integration of measurement for one minute L_{eq} display ("Equivalent" level)
- Linear and severity frequency weightings
- Vibration measurement techniques based on ISO 10816 (ISO 2372 BS 4675, VDI 2056)
- Selectable frequency band: 10 Hz-1kHz, 10 Hz-10 kHz as standard
- WH2258 option for 2513 provides high pass (HP) filter with 10 s L_{eq} time constant

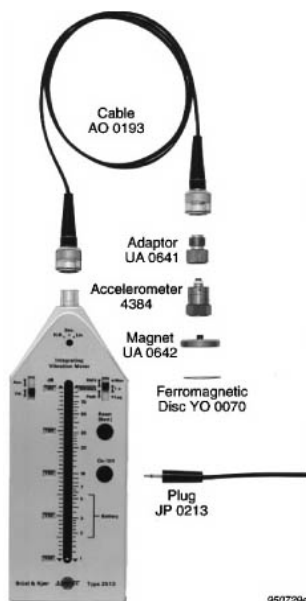


Fig. 1 Interconnection accessories



Fig. 2 The document folder with the Vibration Meter

Technical Information – Integrating Vibration Meters - Types 2513 and 2516

Technical Specifications

Measurement Amplitude Ranges

2513 selectable ranges

Acceleration: 1 to 100 and 10 to 1000 m/s²

Velocity: 0.1 to 10 and 1 to 100 m/s

2516 selectable ranges

Acceleration: 0.1 to 10 and 1 to 100 g

Velocity: 0.01 to 1 and 0.1 to 10 in/s

Maximum internal noise

2513 acceleration: 0.2 m/s²

2513 velocity: 0.1 mm/s

2516 acceleration: 0.02 g

2516 velocity: 0.007 in/s

Measurement frequency ranges

Lin: 10 Hz to 10 kHz +3dB

Sev: 10 Hz to 1 kHz, to ISO 2954

HP: 1 kHz to 10 kHz ±3dB

Environmental

Operating temperature: -10 to +55°C

Storage temperature: -25 to +70°C

Change of temperature: -10 to +55°C (2 cycles, 1°C/min.)

Humidity: 90% RH (non-condensing at 40°C)

Mechanical - non-operating:

Vibration: 0.3mm, 20m/s², 10-500Hz

Shock: 1000m/s²

Bump: 1000 bumps at 250m/s²

Indication

Level indicated: Instantaneous or Maximum True Root-Mean-Square (RMS), with 1s time constant. True Peak, with 1s decay-time constant, L_{eq} simultaneously with Maximum Peak.

Overall Accuracy: (at 80 Hz) +7% (including Accelerometer sensitivity tolerance). Temperature sensitivity +0.05dB/°C. Vibration sensitivity -20dB (relative to the vibration level at the Accelerometer). Magnetic sensitivity negligible for field strengths up to 100 A/m.

Shock Measurement: (with half-sine impulse) +2 - 3dB for 0.1 to 5 ms impulse, +1dB for 0.5 to 2 ms impulse, typical.

RMS Max. Drop: Held indication will fall by not more than 6% of indication per minute.

Peak Rise-Time: 6% per μ s. For a rectangular step: 60 μ s.

L_{eq} /Max.-Peak function: Display gives two simultaneous indications. lower is L_{eq} , upper is Max.-Peak. Display flashes until measurement terminated (after 60 s \pm 2%) with the standard instruments (10 s with the 2513/WH 2258); display is held until total 2 min. after the last "Reset" (2.5 min. for 2513/WH2258).

Display: 41-element LED "thermometer" style.

Brightness Adjustment: Automatic compensation for ambient lighting by photo-sensitive transistor.

Resolution: 6% (0.5 dB). Intermediate levels are signified by illumination of 2 adjacent LEDs.

Scales: Engineering units (m/s² and mm/s on 2513, g's and in/s on 2516) with logarithmic graduations, plus dB re 1 μ m/s² and 1 nm/s (2513) as 0dB (10⁻⁷ in/s on 2516).

Overload Warning: Display flashes and level indication is suppressed until overload is removed.

AC Out: Sub-miniature socket accepting 2.5 mm jack-plug JP0213 or cable AO0173 for connection of a recorder or analyzer. Full insertion of plug disables automatic switch-off. Output impedance 10 Ω in series with 33 mF. Open-circuit voltage 1V corresponds to full scale indication. Min. load 10k Ω .

Batteries

Type: 331.5V cells to IEC specification LR6 ("Penlight" or "AA" size), e.g., alkaline cells QB 0013.

Life: 24 hours continuous measurement in room lighting. In bright sunlight continuous measurement life falls to 10 hours.

Physical Characteristics

Weight: 350 g (12.4 oz) excl. accessories.

Height: 187 mm (7.4 in) without cable.

Width: 72 mm (2.8 in).

Depth: 22 mm (0.9 in).

Enclosure protection: IP20.

Technical Information – Integrating Vibration Meters - Types 2513 and 2516

Accessories included

Integrating Vibration Meters include the following accessories:

Piezoelectric accelerometer.....	4384
Document folder	KE0198
Accelerometer cable (1.2m).....	AO0193
Adaptor, TNC plug to acc.	UA0641
Mounting magnet	UA0642
Sub-miniature Jack plug, 2.5 mm	JP0213
3 Alkaline cells	QB0013
Measurement record pad.....	QP4992

Optional accessories for Types 2513/16

2.5 mm Jack-to-BNC-cable (1.5 m).....	AO0173
Adaptor, 10-32 UNF.....	JP0162
- a miniature coaxial connector to TNC for correction of other accelerometer cables to 2513 or 2516.	
Set of 5 mechanical filters.....	UA0553
Tripod bush adaptor.....	DB1112
Accelerometer calibrator.....	4294

Brüel & Kjær Vibro reserves the right to change specifications without notice

Brüel & Kjær Vibro A/S
2850 Nærum – Denmark
Tel.: +45 4580 0500
Fax: +45 4580 2937
E-mail: info@bkvibro.com

Brüel & Kjær Vibro GmbH
64293 Darmstadt – Germany
Tel.: +49 (0) 6151 428 1100
Fax: +49 (0) 6151 428 1200
E-mail: info@bkvibro.de