



TAPPING CHART

M | MF | UNC | UNF | UNEF | 8UN | BSW | Rc (BSPT) | BSF | BA | BSB | Rp (BSPL) | NPT-NPTF | NPSF | Pg

M ISO METRIC COARSE (60°)		
TAP SIZE	PITCH MM	TAPPING DRILL
M1.6	0.35	1.25
M2	0.4	1.6
M2.5	0.45	2.05
M3	0.5	2.5
M3.5	0.6	2.9
M4	0.7	3.3
M4.5	0.75	3.7
M5	0.8	4.2
M6	1.0	5.0
M8	1.25	6.8
M10	1.5	8.5
M12	1.75	10.2
M14	2.0	12.0
M16	2.0	14.0
M18	2.5	15.5
M20	2.5	17.5
M22	2.5	19.5
M24	3.0	21.0
M27	3.0	24.0
M30	3.5	26.5
M33	3.5	29.5
M36	4.0	32.0
M42	4.5	37.5
M45	4.5	40.5
M48	5.0	43.0
M52	5.0	47.0
M56	5.5	50.5

BSW BRITISH STANDARD WHITWORTH (55°)		
TAP SIZE	T.P.I.	TAPPING DRILL
1/16"	60	1.2
3/32"	48	1.85
1/8	40	2.55
5/32"	32	3.2
3/16	24	3.7
7/32"	24	4.5
1/4	20	5.1
5/16	18	6.5
3/8	16	7.9
7/16	14	9.3
1/2	12	10.5
9/16	12	12.1
5/8	11	13.5
3/4	10	16.25
7/8	9	19.25
1	8	22.0
1 - 1/8	7	24.75
1 - 1/4	7	28.0
1 - 1/2	6	33.5
1 - 3/4	5	39.0
2	4 - 1/2	44.5

Pg STEEL CONDUIT (80°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
Pg7	20	11.3
Pg9	18	13.9
Pg11	18	17.3
Pg13.5	18	19.1
Pg16	18	21.2
Pg21	15	26.8

MF ISO METRIC FINE (60°)		
TAP SIZE	PITCH MM	TAPPING DRILL
M4	0.5	3.5
M5	0.5	4.5
M6	0.75	5.3
M8	1.0	7.0
M10	1.0	9.0
M10	1.25	8.8
M12	1.25	10.8
M12	1.5	10.5
M14	1.25	12.8
M14	1.5	12.5
M16	1.5	14.5
M18	1.5	16.5
M20	1.5	18.5
M22	1.5	20.5
M24	2.0	22.0
M25	1.5	23.5
M32	1.5	30.5
M40	1.5	38.5
M50	1.5	48.5

Rc (BSPT) ISO Rc TAPER SERIES 1:16 (55°)			
TAP SIZE	T.P.I.	DRILL ONLY*	DRILL & REAMER
Rc 1/16	28	6.4	6.2
Rc 1/8	28	8.4	8.4
Rc 1/4	19	11.2	10.8
Rc 3/8	19	14.75	14.5
Rc 1/2	14	18.25	18.0
Rc 3/4	14	23.75	23.0
Rc 1	11	30.0	29.0
Rc 1 - 1/4	11	38.5	38.0
Rc 1 - 1/2	11	44.5	44.0
Rc 2	11	56.0	55.0

BSF BRITISH STANDARD FINE (55°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
3/16	32	4.0
7/32	28	4.6
1/4	26	5.3
5/16	22	6.8
3/8	20	8.3
7/16	18	9.8
1/2	16	11.0
9/16	16	12.7
5/8	14	14.0
11/16	14	15.5
3/4	12	16.75
7/8	11	19.75
1	10	22.75
1 - 1/8	9	25.5
1 - 1/4	9	28.5
1 - 1/2	8	34.5
1 - 3/4	7	41.0

NPSF NATIONAL PIPE STRAIGHT (60°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
1/8	27	8.6
1/4	18	11.3
3/8	18	14.5
1/2	14	18.0

UNF UNIFIED NATIONAL FINE (60°)		
TAP SIZE	T.P.I.	TAPPING DRILL
#3 (.099)	56	2.1
#4 (.112)	48	2.35
#5 (.125)	44	2.65
#6 (.138)	40	2.9
#8 (.164)	36	3.5
#10 (.190)	32	4.1
#12 (.216)	28	4.6
3/16"	32	4.0
1/4	28	5.5
5/16	24	6.9
3/8	24	8.5
7/16	20	9.8
1/2	20	11.5
9/16	18	12.8
M24	18	14.5
3/4	16	17.5
7/8	14	20.5
1	12	23.5
1*	14	24.0
1 - 1/8	12	26.5
1 - 1/4	12	29.5
1 - 3/8	12	33.01
1 - 1/2	12	36.0

NPT-NPTF NATIONAL PIPE TAPER 1:16 (60°)			
TAP SIZE	T.P.I.	DRILL ONLY*	DRILL & REAMER
1/16	27	6.3	6.0
1/8	27	8.5	8.2
1/4	18	11.0	10.8
3/8	18	14.5	14.0
1/2	14	18.0	17.5
3/4	14	23.0	23.0
1	11 - 1/2	29.0	28.5
1 - 1/4	11 - 1/2	37.5	37.0
1 - 1/2	11 - 1/2	44	43.5
2	11 - 1/2	55.5	55.0

8UN (8 TPI) UNIFIED NATIONAL FORM (60°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
1 - 1/8	8	25.5
1 - 1/4	8	28.5
1 - 3/8	8	31.75
1 - 1/2	8	35.0
1 - 5/8	8	38.0
1 - 3/4	8	41.5
1 - 7/8	8	44.5
2	8	47.5

UNEF UNIFIED NATIONAL FORM (60°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
1/4	32	5.6
5/16	32	7.2
3/8	32	8.8
1/2	28	11.8
5/8	24	14.75
3/4	20	18
1	20	24.2


UNC UNIFIED NATIONAL COARSE (60°)		
TAP SIZE	T.P.I.	TAPPING DRILL
#2 (.086)	56	1.85
#3 (.099)	48	2.1
#4 (.112)	40	2.3
#5 (.125)	40	2.6
#6 (.138)	32	2.8
#8 (.164)	32	3.4
#10 (.190)	24	3.8
#12 (.216)	24	4.5
1/4	20	5.1
5/16	18	6.6
3/8	16	8.0
7/16	14	9.4
1/2	13	10.8
9/16	12	12.2
5/8	11	13.5
3/4	10	16.5
7/8	9	19.5
1	8	22.2
1 - 1/8	7	25.0
1 - 1/4	7	28.0
1 - 3/8	6	31.0
1 - 1/2	6	34.0
1 - 3/4	5	39.5
2	4.5	45.0

BA (47.5°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
0	1	5.1
1	0.9	4.5
2	0.81	4.0
3	0.73	3.4
4	0.66	3.0
5	0.59	2.65
6	0.53	2.3
7	0.48	2.05
8	0.43	1.8
9	0.39	1.55
10	0.35	1.4
11	0.31	1.2
12	0.28	1.05
13	0.25	0.98
14	0.23	0.8
15	0.21	0.7
16	0.19	0.6

BSB BRITISH STANDARD BRASS (55°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
1/4	26	5.2
5/16	26	6.8
3/8	26	8.4
7/16	26	10.0
1/2	26	11.6
9/16	26	13.2
5/8	26	14.8
3/4	26	18.0
7/8	26	20.8
1	26	24.3

Rp (BSPL) SEALING PIPE THREAD PARALLEL (55°)		
TAP SIZE	T.P.I.	TAPPING DRILL MM
Rp 1/8	28	8.6
Rp 1/4	19	11.5
Rp 3/8	19	15.0
Rp 1/2	14	18.5
Rp 3/4	14	24.0
Rp 1	11	30.2
Rp 1 - 1/4	11	39.0
Rp 1 - 1/2	11	45.0
Rp 2	11	56.4

THREAD FORMING (FLUTELESS TAPS)		
TAP SIZE	T.P.I.	TAPPING DRILL
METRIC COARSE		
M1	0.25	0.9
M1.1	0.25	1.0
M1.2	0.25	1.1
M1.4	0.3	1.28
M1.6	0.35	1.45
M1.7	0.35	1.55
M1.8	0.35	1.65
M2	0.4	1.8
M2.2	0.45	2.0
M2.3	0.4	2.1
M2.5	0.45	2.3
M2.6	0.45	2.4
M3	0.5	2.8
M3.5	0.6	3.2
M4	0.7	3.7
M5	0.8	4.6
M6	1.0	5.5
M8	1.25	7.4
M10	1.5	9.3
M12	1.75	11.2
BSW		
1/8	40	2.9
5/32	32	3.6
3/16	24	4.3
1/4	20	5.8
5/16	18	7.3
3/8	16	8.8
UNC		
#1 (.073)	64	1.7
#2 (.086)	56	2.0
#3 (.099)	48	2.3
#4 (.112)	40	2.6
#5 (.125)	40	2.9
#6 (.138)	32	3.2
#8 (.164)	32	3.8
#10 (.190)	24	4.4
#12 (.216)	24	5.0
1/4	20	5.8
5/16	18	7.3
3/8	16	8.8
7/16	14	10.2
1/2	13	11.7
UNF		
#1 (.073)	72	1.7
#2 (.086)	64	2.0
#3 (.099)	56	2.3
#4 (.112)	48	2.6
#5 (.125)	44	2.9
#6 (.138)	40	3.2
#8 (.164)	36	3.9
#10 (.190)	32	4.5
#12 (.216)	28	5.1
1/4	28	6.0
5/16	24	7.5
3/8	24	9.0
7/16	20	10.6
1/2	20	12.1
G (BSPF)		
1/8	28	9.25
1/4	19	12.5
3/8	19	16.0
1/2	14	20.0
5/8	14	22.0
3/4	14	25.5
7/8	14	29.25
1	11	32.0

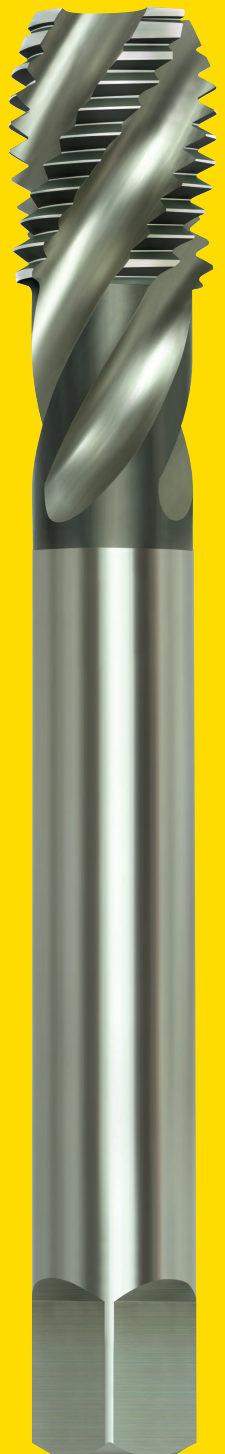

- 135° SPLIT POINT CUTS FASTER AND REDUCES WANDERING
- FULLY GROUND M2 HSS INCREASES DRILL LIFE
- TITANIUM NITRIDE COATING REDUCES HEAT AND INCREASES LUBRICITY FOR EXTENDED LIFE

- MADE IN EUROPE
- PRECISION MANUFACTURED TO I.S.O. & D.I.N. STANDARDS

DISTRIBUTED BY:

BOLT & NUT
AUSTRALIA
PTY LTD.