


Mechanical Joint Rodless Cylinder

Series MY1C

Cam Follower Guide/ø16, ø20, ø25, ø32, ø40, ø50, ø63

How to Order

Cam follower guide

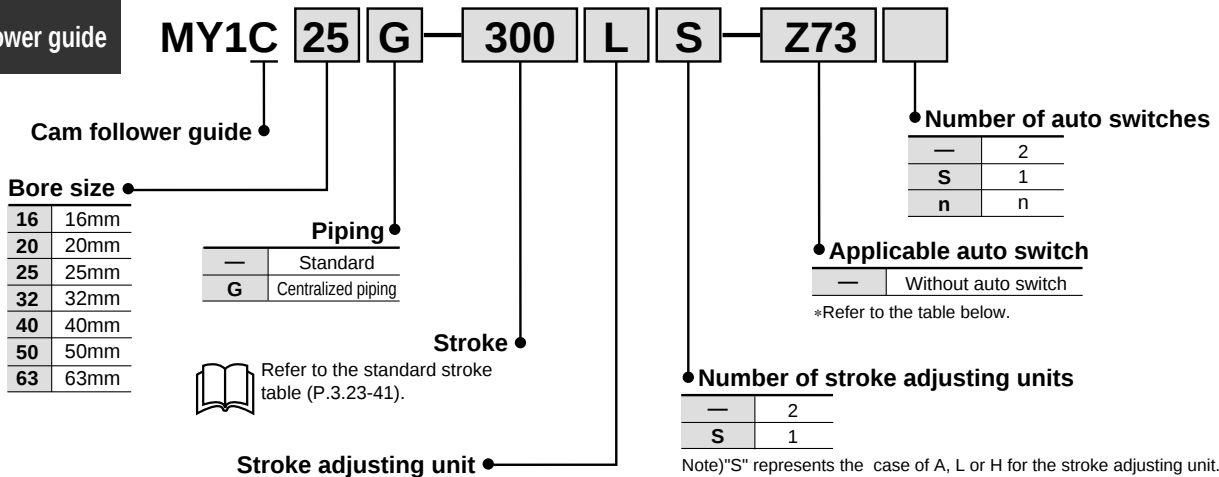

Note)"S" represents the case of A, L or H for the stroke adjusting unit.

Applicable auto switches/ For detailed explanation of the auto switches, refer to the description on p.5.3-2.

For ø16, ø20

Model	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model		Lead wire*(m)			Applicable load	
					DC	AC	Electrical entry		0.5 (—)	3 (L)	5 (Z)		
Reed switch	—	Grommet	No	2 wire	24V	5V 12V 100V or less	A90V	A90	●	●	—	IC	Relay PLC
			Yes	3 wire (Eqv. NPN)	—	5V	A93V	A93	●	●	—	—	—
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	12V	F9NV	F9N	●	●	—	—	Relay PLC
				3 wire (PNP)			F9PV	F9P	●	●	—		
				2 wire			F9BV	F9B	●	●	—		
				3 wire (NPN)			F9NWV	F9NW	●	●	○		
				3 wire (PNP)			F9PWV	F9PW	●	●	○		
				2 wire			F9BWV	F9BW	●	●	○		
				Diagnostic indication (2 color)									

*Lead wire length 0.5m.....— 3m.....L 5m.....Z (Example) F9NW F9NWL F9NWZ

*○: Manufactured upon receipt of order.

For ø25, ø32, ø40, ø50, ø63

Model	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model		Lead wire*(m)			Applicable load	
					DC	AC	Electrical entry		0.5 (—)	3 (L)	5 (Z)		
Reed switch	—	Grommet	Yes	3 wire	—	5V	—	Z76	●	●	—	IC	—
			No	2 wire	24V	5V 12V 100V or less	—	Z73	●	●	●	—	Relay PLC
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V 12V	Y69A	Y59A	●	●	○	—	Relay PLC
				3 wire (PNP)			Y7PV	Y7P	●	●	○		
				2 wire			Y69B	Y59B	●	●	○		
				3 wire (NPN)			Y7NWV	Y7NW	●	●	○		
				3 wire (PNP)			Y7PWV	Y7PW	●	●	○		
				2 wire			Y7BWV	Y7BW	●	●	○		
				Diagnostic indication (2 color)									

*Lead wire length 0.5m.....— 3m.....L 5m.....Z (Example) Y59A Y59AL Y59AZ

*○: Manufactured upon receipt of order.

Shock absorbers for units L and H*

Bore (mm)	16	20	25	32	40	50	63
Unit No.							
Unit L	RB0806	RB0806	RB1007	RB1412	RB1412	RB2015	RB2015
Unit H	—	RB1007	RB1412	RB2015	RB2015	RB2725	RB2725

Note) MY1C16: Unit L only.

Option

Stroke adjusting unit No.

Bore (mm)	16	20	25	32
Unit No.				
Unit A	MYM-A16A	MYM-A20A	MYM-A25A	MYM-A32A
Unit L	MYM-A16L	MYM-A20L	MYM-A25L	MYM-A32L
Unit H	—	MYM-A20H	MYM-A25H	MYM-A32H

Bore (mm)	40	50	63
Unit No.			
Unit A	MYM-A40A	MYM-A50A	MYM-A63A
Unit L	MYM-A40L	MYM-A50L	MYM-A63L
Unit H	MYM-A40H	MYM-A50H	MYM-A63H

Side support No.

Bore (mm)	16	20	25	32
Style				
Side support A	MY-S16A	MY-S20A	MY-S25A	MY-S32A
Side support B	MY-S16B	MY-S20B	MY-S25B	MY-S32B

Bore (mm)	40	50	63
Style			
Side support A	MY-S40A	MY-S63A	
Side support B	MY-S40B	MY-S63B	

For detailed information on size etc, refer to the p.3.23-48.