


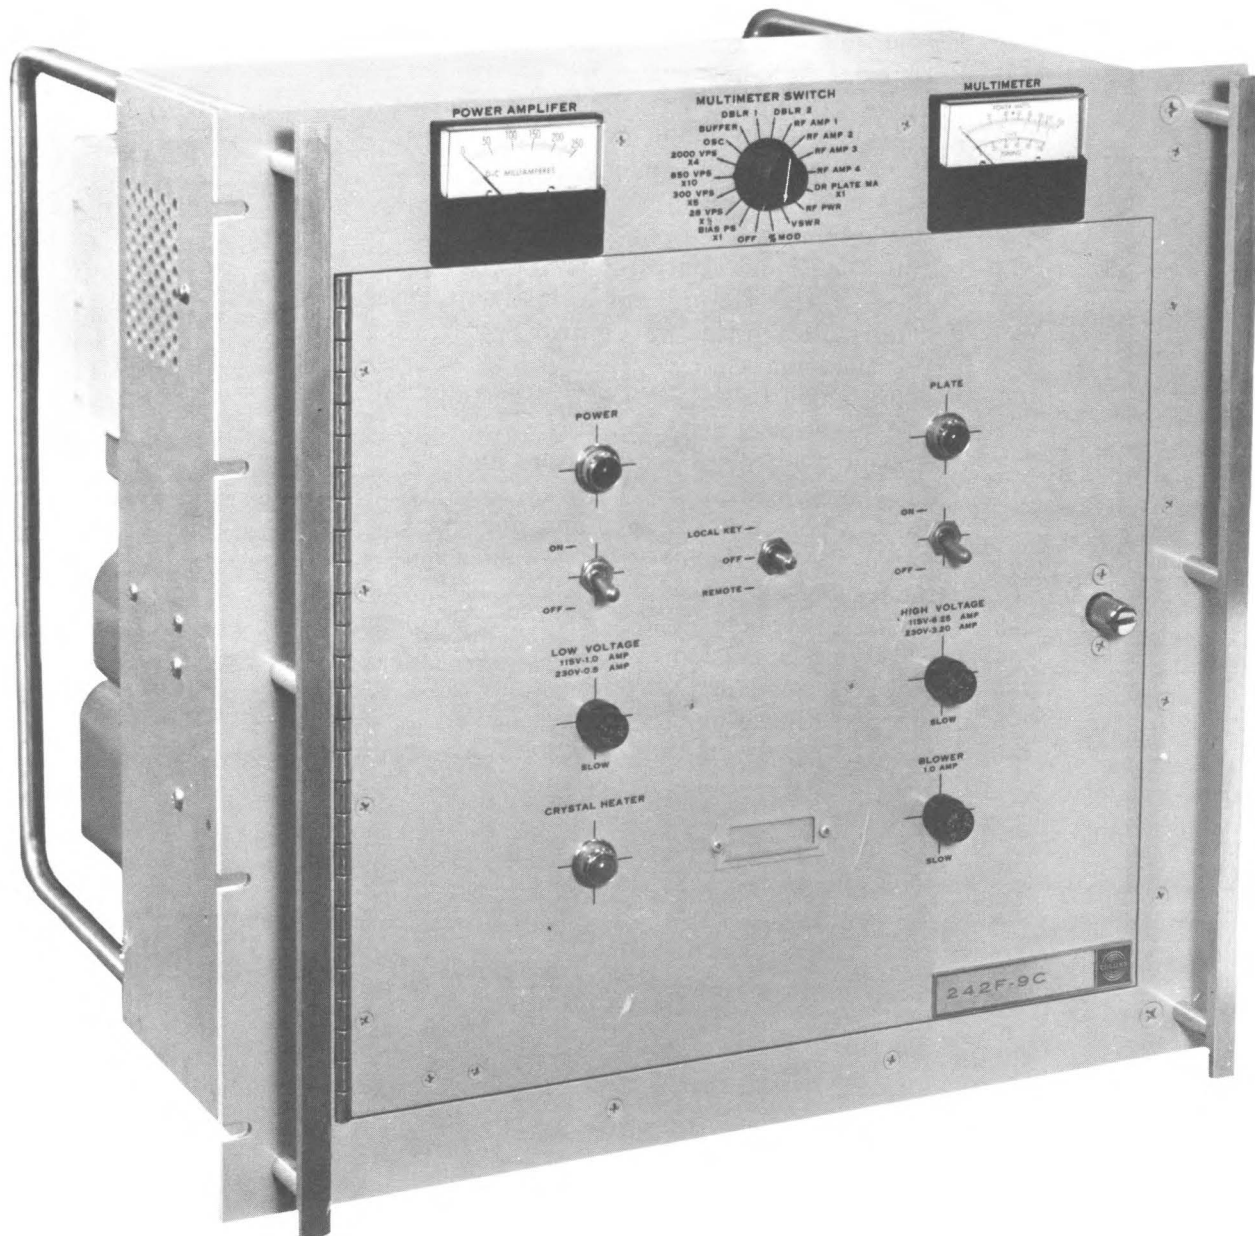

TPI -1915-017

Figure 1-1. 242F-9C VHF/UHF Transmitter.

242F-9C VHF/UHF Transmitter

List of Effective Pages

*The asterisk indicates pages changed, added, or deleted by the current change.

Page No	Issue	Page No	Issue	Page No	Issue
Cover.....	5 April 1968	*6-6.....	1 July 1969	*6-97.....	1 July 1969
*Title.....	1 July 1969	6-7.....	5 April 1968	6-98 thru 6-99.....	5 April 1968
*A thru B.....	1 July 1969	*6-8 thru 6-17.....	1 July 1969	*6-100 thru 6-101.....	1 July 1969
*C Added.....	1 July 1969	6-18.....	5 April 1968	6-102 thru 6-104.....	5 April 1968
i thru iv.....	5 April 1968	*6-19 thru 6-29.....	1 July 1969	*6-105 thru 6-106.....	1 July 1969
*v.....	1 July 1969	6-30.....	5 April 1968	6-107.....	5 April 1968
1-0 thru 1-1.....	5 April 1968	*6-31.....	1 July 1969	*6-108 thru 6-109.....	1 July 1969
*1-2.....	1 July 1969	6-32.....	5 April 1968	6-110 Blank.....	5 April 1968
*2-1 thru 2-2.....	1 July 1969	*6-33 thru 6-35.....	1 July 1969	*7-1.....	1 July 1969
2-3.....	5 April 1968	6-36 thru 6-37.....	5 April 1968	7-2 Blank.....	5 April 1968
2-4 Blank.....	5 April 1968	*6-38 thru 6-39.....	1 July 1969	7-3.....	5 April 1968
2-5.....	5 April 1968	6-40.....	5 April 1968	7-4 Blank.....	5 April 1968
2-6 Blank.....	5 April 1968	*6-41 thru 6-42.....	1 July 1969	*7-5.....	1 July 1969
2-7.....	5 April 1968	6-43.....	5 April 1968	7-6 Blank.....	5 April 1968
*2-8.....	1 July 1969	*6-44 thru 6-45.....	1 July 1969	*7-7.....	1 July 1969
2-9.....	5 April 1968	6-46 thru 6-47.....	5 April 1968	7-8 Blank.....	5 April 1968
*2-10.....	1 July 1969	*6-48.....	1 July 1969		
2-11.....	5 April 1968	6-49.....	5 April 1968		
*2-12 thru 2-26.....	1 July 1969	*6-50.....	1 July 1969		
*2-26A Added.....	1 July 1969	6-51 thru 6-52.....	5 April 1968		
*2-26B Blank Added.....	1 July 1969	*6-53 thru 6-57.....	1 July 1969		
2-27 thru 2-30.....	5 April 1968	6-58 Blank.....	5 April 1968		
*2-30A Added.....	1 July 1969	*6-59 thru 6-63.....	1 July 1969		
*2-30B Blank Added.....	1 July 1969	6-64 Blank.....	5 April 1968		
*2-31.....	1 July 1969	*6-65.....	1 July 1969		
2-32 thru 2-33.....	5 April 1968	6-66 Blank.....	5 April 1968		
2-34 Blank.....	5 April 1968	*6-67.....	1 July 1969		
3-1 thru 3-4.....	5 April 1968	6-68.....	5 April 1968		
4-1 thru 4-14.....	5 April 1968	*6-69 thru 6-71.....	1 July 1969		
*4-15.....	1 July 1969	6-72 Blank.....	5 April 1968		
4-16 thru 4-25.....	5 April 1968	6-73.....	5 April 1968		
4-26 Blank.....	5 April 1968	6-74 Blank.....	5 April 1968		
4-27 thru 4-31.....	5 April 1968	6-75.....	5 April 1968		
4-32 Blank.....	5 April 1968	*6-76.....	1 July 1969		
4-33.....	5 April 1968	6-77 thru 6-84.....	5 April 1968		
4-34 Blank.....	5 April 1968	*6-85.....	1 July 1969		
4-35.....	5 April 1968	6-86.....	5 April 1968		
4-36 Blank.....	5 April 1968	*6-87.....	1 July 1969		
4-37.....	5 April 1968	6-88.....	5 April 1968		
4-38 Blank.....	5 April 1968	*6-89 thru 6-90.....	1 July 1969		
5-1 thru 5-16.....	5 April 1968	6-91.....	5 April 1968		
6-1 thru 6-4.....	1 July 1969	*6-92 thru 6-95.....	1 July 1969		
6-5.....	5 April 1968	6-96.....	5 April 1968		

Collins Radio Company welcomes your comments concerning this instruction book. Although every effort has been made to keep it free of errors, some do occur. When reporting a specific problem, please describe it briefly and include the instruction book part number, the paragraph or figure number, and the page number.

Send your comments to: Collins Radio Company
Publications Engineering Department
Mail Station 172-002
Cedar Rapids, Iowa 52406

242F-9C VHF/UHF Transmitter

Record of Revisions

RETAIN THIS RECORD IN THE FRONT OF MANUAL.
ON RECEIPT OF REVISIONS, INSERT REVISED PAGES IN THE MANUAL,
AND ENTER DATE INSERTED AND INITIALS.

ASSIGNED TO (JOB TITLE)

LOCATION

[illegible]



SERVICE BULLETIN LIST

SERVICE BULLETIN NO.	SUBJECT	MANUAL ED/REV NUMBER	MANUAL REVISION DATE
1	Improved personnel safety protection.		3-15-68
2	Diode removal and spark gap addition for increased reliability.		6-17-68
3	Replacement of screws in the PA tuned cavity.		6-17-68
4	Reduction of transistor failure rate.		10-25-68

table of contents

	<i>Page</i>
Section 1 General Description	1-1
1.1 Purpose of Instruction Book	1-1
1.2 Purpose of Equipment	1-1
1.3 Equipment Supplied	1-1
1.4 Equipment Required But Not Supplied	1-2
1.5 Equipment Specifications	1-2
Section 2 Installation	2-1
2.1 General	2-1
2.2 Unpacking	2-1
2.3 AC Power Cable	2-1
2.4 External Oscillator	2-1
2.5 Installation	2-1
2.6 Antenna Transmission Line	2-2
2.7 Initial Tuning and Adjustment Procedures	2-2
2.7.1 General	2-2
2.7.2 Procedures	2-8
2.8 Narrow Audio Band to Wide Audio Band Conversion	2-32
2.9 RF Band Conversion	2-32
2.9.1 VHF to UHF Conversion	2-32
2.9.2 UHF to VHF Conversion	2-33
Section 3 Operation	3-1
3.1 General	3-1
3.2 Operating Controls and Indicators	3-1
3.3 Operating Procedures	3-1
3.3.1 Local Operation	3-1
3.3.2 Remote Operation	3-3
Section 4 Principles of Operation	4-1
4.1 General	4-1
4.2 General Principles of Operation	4-1
4.3 Detailed Theory of Operation	4-2
4.3.1 Crystal Oscillator and Frequency Doublers	4-2
4.3.2 Exciter Module	4-7
4.3.3 Driver Stage	4-16
4.3.4 Power Amplifier	4-16
4.3.5 Power Amplifier Cavity	4-19
4.3.6 Output Circuitry	4-19
4.3.7 Feedback Circuits	4-19

table of contents (cont)

	<i>Page</i>
4.3.8 Modulator	4-21
4.3.9 Metering Circuits	4-23
4.3.10 Power Supplies	4-29
4.3.11 Control Circuits	4-30
 Section 5 Maintenance	 5-1
5.1 General	5-1
5.2 Troubleshooting	5-1
5.3 Disassembly	5-1
5.3.1 General	5-1
5.3.2 Driver Tube Removal	5-9
5.3.3 Power Amplifier Tube Removal	5-9
5.3.4 PA Tuned Cavity Removal	5-9
5.3.5 PA Tuned Cavity Disassembly	5-10
5.3.6 Gearplate Assembly, Disassembly	5-10
5.3.7 Removal of Power Amplifier Tube Socket and Nonmetallic Gears .	5-10
5.3.8 Driver Tube Socket Removal	5-11
5.3.9 Variable Capacitor C77 and Variable Capacitor C63 Removal	5-11
5.4 Assembly	5-11
5.4.1 General	5-11
5.4.2 Power Amplifier Tube Socket Installation	5-12
5.4.3 Driver Tube Socket Installation	5-13
5.4.4 PA Tuned Cavity Assembly	5-13
5.4.5 Variable Capacitor C77, Variable Capacitor C63, and Power Amplifier Tube Socket Installation	5-14
5.4.6 PA Tuned Cavity Installation	5-15
 Section 6 Parts List	 6-1
 Section 7 Illustrations	 7-1

list of illustrations


<i>Figure</i>	<i>Page</i>
1-1 242F-9C VHF/UHF Transmitter.....	1-0
2-1 Power Supply Connections, T401 and T402.....	2-2
2-2 Assembly of BNC-Type Coaxial Connection.....	2-3
2-3 242F-9C VHF/UHF Transmitter, Outline and Mounting Dimensions	2-5
2-4 Assembly of N-Type Coaxial Connector.....	2-7
2-5 Test Equipment Setup, Initial Tuning and Adjustment, and Modulator Alignment Procedure One.....	2-11
2-6 Test Equipment Setup, Initial Tuning and Adjustment, and Modulator Alignment Procedure Two.....	2-11
2-7 Narrow Audio Band to Wide Audio Band Conversion, Wiring Diagram.....	2-32
2-8 VHF Transmitter, Mounting of Inductor L38.....	2-32
2-9 UHF Transmitter, Mounting of Resistors R26 and R27.....	2-33
3-1 242F-9C VHF/UHF Transmitter, Location of Operating Controls and Indicators.....	3-2
3-2 Microphone Plug Connections.....	3-3
4-1 242F-9C VHF/UHF Transmitter, Block Diagram.....	4-1
4-2 Crystal Oscillator, Simplified Schematic Diagram.....	4-3
4-3 Buffer Amplifier, Simplified Schematic Diagram.....	4-4
4-4 First Doubler, Simplified Schematic Diagram.....	4-5
4-5 Second Doubler, Simplified Schematic Diagram.....	4-6
4-6 VHF First RF Amplifier, Simplified Schematic Diagram.....	4-7
4-7 VHF Second RF Amplifier, Simplified Schematic Diagram.....	4-8
4-8 VHF Third RF Amplifier, Simplified Schematic Diagram.....	4-9
4-9 VHF Fourth RF Amplifier, Simplified Schematic Diagram.....	4-10
4-10 UHF First RF Amplifier/Third Doubler, Simplified Schematic Diagram.....	4-11
4-11 UHF Second RF Amplifier, Simplified Schematic Diagram.....	4-12
4-12 UHF Third RF Amplifier, Simplified Schematic Diagram.....	4-13
4-13 UHF Fourth RF Amplifier, Simplified Schematic Diagram.....	4-15
4-14 UHF Modulation Amplifier, Simplified Schematic Diagram.....	4-15
4-15 Driver Stage, Simplified Schematic Diagram.....	4-17
4-16 Power Amplifier and Cavity, Simplified Schematic Diagram.....	4-18
4-17 AGC Circuit, Simplified Schematic Diagram.....	4-20
4-18 Envelope Feedback Amplifier, Simplified Schematic Diagram.....	4-21
4-19 Audio Limiter, Simplified Schematic Diagram.....	4-22
4-20 Multimeter Circuits, Simplified Schematic Diagram.....	4-25
4-21 UHF Multimeter Circuits, Simplified Schematic Diagram.....	4-28
4-22 Local Control Circuits, Simplified Schematic Diagram.....	4-31
4-23 Remote Control Circuits, Simplified Schematic Diagram.....	4-35

list of illustrations (cont)

<i>Figure</i>	<i>Page</i>
5-1 Nominal Tube Voltages	5-8
6-1 242F-9C Radio Transmitter	6-25
6-2 Transmitter Modulator Subassembly	6-43
6-3 Electrical Component Bracket	6-52
6-4 Electrical Switch Bracket	6-55
6-5 PA Tuned Cavity	6-57
6-6 RF Detector	6-78
6-7 Transmitter VHF Exciter Subassembly (Sheet 1 of 4, Index 1 Through 34)	6-79
6-7 Transmitter VHF Exciter Subassembly (Sheet 2 of 4, Index 35 Through 66)	6-82
6-7 Transmitter VHF Exciter Subassembly (Sheet 3 of 4, Index 67 Through 89A)	6-84
6-7 Transmitter VHF Exciter Subassembly (Sheet 4 of 4, Index 92 Through 152)	6-86
6-8 Transmitter UHF Exciter Subassembly (Sheet 1 of 4, Index 1 Through 29)	6-89
6-8 Transmitter UHF Exciter Subassembly (Sheet 2 of 4, Index 32 Through 68)	6-91
6-8 Transmitter UHF Exciter Subassembly (Sheet 3 of 4, Index 69 Through 107)	6-93
6-8 Transmitter UHF Exciter Subassembly (Sheet 4 of 4, Index 108 Through 162)	6-96
6-9 Frequency Multiplier Oscillator (Sheet 1 of 4, Index 1 Through 20)	6-99
6-9 Frequency Multiplier Oscillator (Sheet 2 of 4, Index 21 Through 64)	6-101
6-9 Frequency Multiplier Oscillator (Sheet 3 of 4, Index 68 Through 100)	6-103
6-9 Frequency Multiplier Oscillator (Sheet 4 of 4, Index 101 Through 150)	6-106
6-10 Resistor Assembly	6-108
7-1 242F-9C VHF/UHF Transmitter, Schematic Diagram	7-1

list of tables

<i>Table</i>	<i>Page</i>
1-1 Equipment Supplied with VHF Transmitter	1-1
1-2 Equipment Supplied with UHF Transmitter	1-1
1-3 Equipment Supplied With Each Transmitter.....	1-1
1-4 Equipment Required But Not Supplied	1-2
1-5 242F-9C VHF/UHF Transmitter Specifications.....	1-2
2-1 Tuning and Adjustment Controls	2-9
2-2 Test Equipment Required	2-10
2-3 Initial Functional Control Settings	2-10
2-4 242F-9C Initial Tuning and Adjustment Procedures	2-12
2-5 Recommended Initial RF Control Settings for VHF Operation	2-31
2-6 Recommended Initial RF Control Settings for UHF Operation	2-31
3-1 Operating Controls and Indicators and Their Functions.....	3-1
4-1 242F-9C Operating Voltages and Functions.....	4-29
5-1 Test Equipment Required for Troubleshooting.....	5-1
5-2 Troubleshooting Procedure.....	5-2
5-3 Typical Multimeter Readings Versus Frequency for 50-Watt Operation.....	5-5
5-4 Nominal Transistor DC Voltages.....	5-5
5-5 Nominal Transistor AC Voltages.....	5-6
5-6 Nominal Transistor Audio Voltages.....	5-7

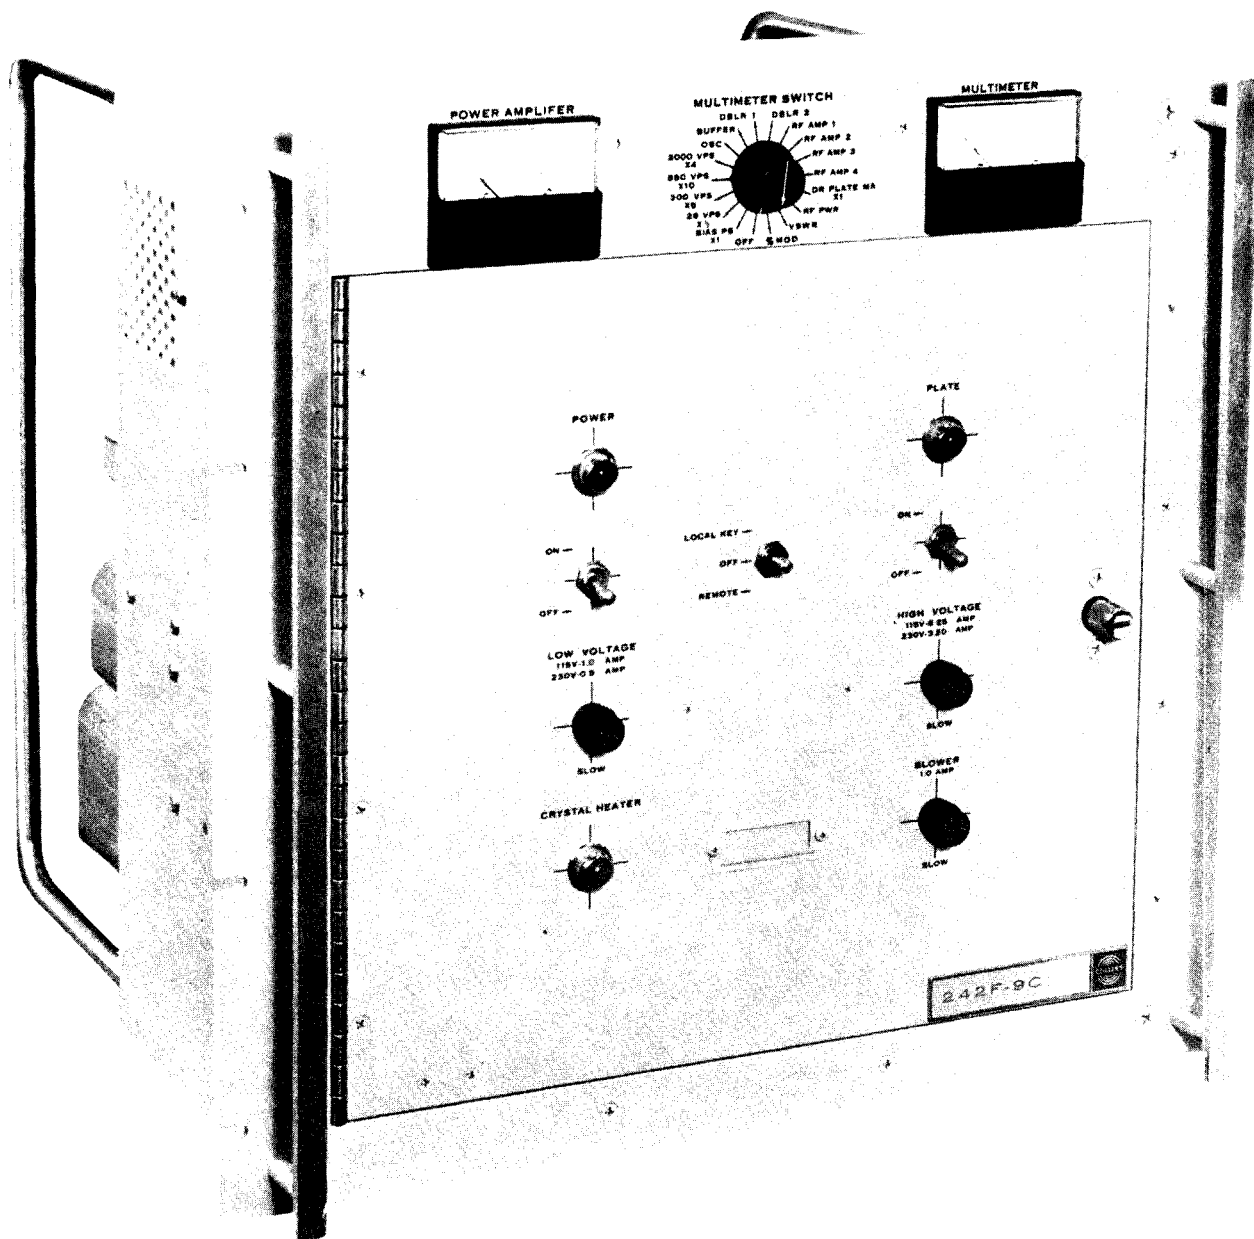

TPI-1915-017

Figure 1-1. 242F-9C VHF/UHF Transmitter.

list of tables

<i>Table</i>	<i>Page</i>
1-1 Equipment Supplied with VHF Transmitter	1-1
1-2 Equipment Supplied with UHF Transmitter	1-1
1-3 Equipment Supplied With Each Transmitter.....	1-1
1-4 Equipment Required But Not Supplied	1-2
1-5 242F-9C VHF/UHF Transmitter Specifications.....	1-2
2-1 Tuning and Adjustment Controls	2-9
2-2 Test Equipment Required	2-10
2-3 Initial Functional Control Settings	2-10
2-4 242F-9C Initial Tuning and Adjustment Procedures	2-12
2-5 Recommended Initial RF Control Settings for VHF Operation	2-31
2-6 Recommended Initial RF Control Settings for UHF Operation	2-31
3-1 Operating Controls and Indicators and Their Functions.....	3-1
4-1 242F-9C Operating Voltages and Functions.....	4-29
5-1 Test Equipment Required for Troubleshooting.....	5-1
5-2 Troubleshooting Procedure.....	5-2
5-3 Typical Multimeter Readings Versus Frequency for 50-Watt Operation.....	5-5
5-4 Nominal Transistor DC Voltages.....	5-5
5-5 Nominal Transistor AC Voltages.....	5-6
5-6 Nominal Transistor Audio Voltages.....	5-7

242F-9C VHF/UHF Transmitter

List of Effective Pages

*The asterisk indicates pages changed, added, or deleted by the current change.

Page No	Issue	Page No	Issue	Page No	Issue
Cover.....	5 April 1968	*6-6.....	1 July 1969	*6-97.....	1 July 1969
*Title.....	1 July 1969	6-7.....	5 April 1968	6-98 thru 6-99.....	5 April 1968
*A thru B.....	1 July 1969	*6-8 thru 6-17.....	1 July 1969	*6-100 thru 6-101.....	1 July 1969
*C Added.....	1 July 1969	6-18.....	5 April 1968	6-102 thru 6-104.....	5 April 1968
i thru iv.....	5 April 1968	*6-19 thru 6-29.....	1 July 1969	*6-105 thru 6-106.....	1 July 1969
*v.....	1 July 1969	6-30.....	5 April 1968	6-107.....	5 April 1968
1-0 thru 1-1.....	5 April 1968	*6-31.....	1 July 1969	*6-108 thru 6-109.....	1 July 1969
*1-2.....	1 July 1969	6-32.....	5 April 1968	6-110 Blank.....	5 April 1968
*2-1 thru 2-2.....	1 July 1969	*6-33 thru 6-35.....	1 July 1969	*7-1.....	1 July 1969
2-3.....	5 April 1968	6-36 thru 6-37.....	5 April 1968	7-2 Blank.....	5 April 1968
2-4 Blank.....	5 April 1968	*6-38 thru 6-39.....	1 July 1969	7-3.....	5 April 1968
2-5.....	5 April 1968	6-40.....	5 April 1968	7-4 Blank.....	5 April 1968
2-6 Blank.....	5 April 1968	*6-41 thru 6-42.....	1 July 1969	*7-5.....	1 July 1969
2-7.....	5 April 1968	6-43.....	5 April 1968	7-6 Blank.....	5 April 1968
*2-8.....	1 July 1969	*6-44 thru 6-45.....	1 July 1969	*7-7.....	1 July 1969
2-9.....	5 April 1968	6-46 thru 6-47.....	5 April 1968	7-8 Blank.....	5 April 1968
*2-10.....	1 July 1969	*6-48.....	1 July 1969		
2-11.....	5 April 1968	6-49.....	5 April 1968		
*2-12 thru 2-26.....	1 July 1969	*6-50.....	1 July 1969		
*2-26A Added.....	1 July 1969	6-51 thru 6-52.....	5 April 1968		
*2-26B Blank Added.....	1 July 1969	*6-53 thru 6-57.....	1 July 1969		
2-27 thru 2-30.....	5 April 1968	6-58 Blank.....	5 April 1968		
*2-30A Added.....	1 July 1969	*6-59 thru 6-63.....	1 July 1969		
*2-30B Blank Added.....	1 July 1969	6-64 Blank.....	5 April 1968		
*2-31.....	1 July 1969	*6-65.....	1 July 1969		
2-32 thru 2-33.....	5 April 1968	6-66 Blank.....	5 April 1968		
2-34 Blank.....	5 April 1968	*6-67.....	1 July 1969		
3-1 thru 3-4.....	5 April 1968	6-68.....	5 April 1968		
4-1 thru 4-14.....	5 April 1968	*6-69 thru 6-71.....	1 July 1969		
*4-15.....	1 July 1969	6-72 Blank.....	5 April 1968		
4-16 thru 4-25.....	5 April 1968	6-73.....	5 April 1968		
4-26 Blank.....	5 April 1968	6-74 Blank.....	5 April 1968		
4-27 thru 4-31.....	5 April 1968	6-75.....	5 April 1968		
4-32 Blank.....	5 April 1968	*6-76.....	1 July 1969		
4-33.....	5 April 1968	6-77 thru 6-84.....	5 April 1968		
4-34 Blank.....	5 April 1968	*6-85.....	1 July 1969		
4-35.....	5 April 1968	6-86.....	5 April 1968		
4-36 Blank.....	5 April 1968	*6-87.....	1 July 1969		
4-37.....	5 April 1968	6-88.....	5 April 1968		
4-38 Blank.....	5 April 1968	*6-89 thru 6-90.....	1 July 1969		
5-1 thru 5-16.....	5 April 1968	6-91.....	5 April 1968		
6-1 thru 6-4.....	1 July 1969	*6-92 thru 6-95.....	1 July 1969		
6-5.....	5 April 1968	6-96.....	5 April 1968		

Collins Radio Company welcomes your comments concerning this instruction book. Although every effort has been made to keep it free of errors, some do occur. When reporting a specific problem, please describe it briefly and include the instruction book part number, the paragraph or figure number, and the page number.

Send your comments to: Collins Radio Company
Publications Engineering Department
Mail Station 172-002
Cedar Rapids, Iowa 52406

1.4 EQUIPMENT REQUIRED BUT NOT SUPPLIED

Table 1-4 lists the equipment required but not supplied with each transmitter.

1.5 EQUIPMENT SPECIFICATIONS

Table 1-5 lists the specifications for the 242F-9C.

Table 1-4. Equipment Required But Not Supplied.

EQUIPMENT	FUNCTION	DESCRIPTION
Crystal, CR-65/U	Determines the transmitter output frequency	HC-6/U holder
Microphone	Local voice operation	Low impedance carbon type with a 3-wire circuit or transistorized, dynamic, carbon microphone replacement, Turner A25338A, Collins 020-0200-000
Antenna transmission line	Connects transmitter rf output to antenna	Coaxial with 50-ohm impedance, RG-213/U, Collins 425-0952-000

Table 1-5. 242F-9C VHF/UHF Transmitter Specifications.

CHARACTERISTIC	SPECIFICATION
Rf power output	50-watt carrier power at 90% modulation.
Vhf frequency range	116 to 152 MHz.
Uhf frequency range	225 to 400 MHz.
Frequency stability	±0.0014% using internal tuning circuit.
Channels	1.
Oscillator	Crystal controlled with CR-65/U type crystal (±0.001% tolerance). An external oscillator may be used in place of the internal oscillator.

Table 1-5. 242F-9C VHF/UHF Transmitter Specifications (Cont).

CHARACTERISTIC	SPECIFICATION
Harmonic attenuation	Not less than 80 db down from carrier.
Rf intermodulation	
Vhf	At least 55 db below carrier.
Uhf	At least 50 db below carrier.
Undesired radiation	Not more than 45 db above 1 microvolt, 25 to 440 MHz. Not more than 50 db above 1 microvolt, 440 to 1000 MHz.
Modulation	Low-level, up to 90%.
Audio input	600 or 150-ohm balanced inputs, -15 to +10 dbm, low impedance microphone.
Audio response	
Narrow band	±1.5 db, 300 to 3000 Hz; -15 db, 10 kHz.
Wide band	±3 db, 100 to 20,000 Hz.
Audio limiting	Not more than a 3-db increase in modulation percentage with a 20-db increase in audio input.
Audio distortion	Not more than 10% with a 50-watt output.
Carrier rise/fall time	Not more than 35 milliseconds.
Noise level	Not less than 50 db below 90% modulation.
Carrier shift	Not more than 10%.
Weight	94 pounds.
Temperature	-10 to +60 °C (+14 to +140 °F).
Humidity	0 to 95%.
Power source requirement	115 or 230 volts, 50 to 60 Hz, single-phase. (Units are factory wired for 115 vac.)

section 2

installation

2.1 GENERAL

This section contains information pertaining to the installation of the 242F-9C VHF/UHF Transmitter. This information includes initial procedures for turning on and aligning the transmitter. Also included are procedures for converting the modulator from narrow to wide audio band operation, and for converting a vhf to a uhf transmitter and vice versa.

2.2 UNPACKING

Carefully unpack the 242F-9C. Open the front panel door and inspect the interior areas for evidence of breakage, damage, or connections which may have worked loose during shipping. Inspect all components on the front and rear portions of the transmitter for breakage and damage. Check all switches and controls for freedom of movement. Any claim for damage should be filed promptly with the transportation company. If a claim is to be filed, the unit must be repacked in its original shipping container.

2.3 AC POWER CABLE

If the 242F-9C is to be used with a 115-volt ac power source, the power cable supplied with the transmitter should be used (refer to tables 1-1 or 1-2). The 242F-9C also has the capability of being powered from a 230-volt ac power source. To use the 230-volt ac power source, the following procedure should be performed:

Caution

Under no circumstances should the transmitter be connected to a 230-volt ac power source when the transmitter power supplies are wired for 115 volts ac.

- a. Remove parallel-connected jumpers on transformers T401 and T402 and install jumpers for series connections. Refer to figure 2-1.
- b. Replace the 115-volt ac fuses on the front panel door with appropriate 230-volt ac fuses.
- c. If necessary, replace facility outlet connector on furnished power cable with a standard 230-volt ac connector.

2.4 EXTERNAL OSCILLATOR

The 242F-9C has an internal crystal oscillator. If the customer desires to use an external oscillator (HP-606 or equivalent, 50- to 100-mv level) instead of the crystal oscillator, the following procedure should be performed:

- a. Remove crystal oven from oscillator-doubler module.
- b. Connect rf cable from external oscillator to AUXILIARY OSCILLATOR INPUT jack J12 on oscillator-doubler module.

Note

If the external oscillator cable connector does not mate with J12, the furnished mating connector may be used. Refer to figure 2-2.

2.5 INSTALLATION

The 242F-9C is designed to be mounted in a standard 19-inch relay rack. Refer to figure 2-3 for the vertical and depth requirements. Careful consideration should be given to the placement of the transmitter, particularly with regard to the power line source, antenna location, servicing access area, and ventilation. Because the transmitter uses forced-air cooling, it should be located in an area having a

reasonably clean environment. The transmitter should be placed as close as possible to the antenna to prevent excessive losses in the coaxial cable connecting the transmitter to the antenna. The ambient equipment temperature should not exceed +60 °C (+140 °F) in order to prolong component life.

2.6 ANTENNA TRANSMISSION LINE

The antenna transmission line should be connected to RF OUTPUT jack J11.

Note

If the antenna transmission line connector does not mate with J11, the furnished connector may be used instead. Refer to figure 2-4.

2.7 INITIAL TUNING AND ADJUSTMENT PROCEDURES

2.7.1 General

After the 242F-9C has been installed in its operating position, certain tuning and adjustment procedures must be performed. These tuning and adjustment procedures consist of checking the power supply outputs, adjusting the driver and power amplifier bias supplies, tuning the rf stages, and adjusting the modulator circuit. However, before beginning the tuning and adjustment procedures, determine whether narrow audio band or wide audio band modulation is to be used (reference paragraph 2.8). Also determine whether the 242F-9C is to be operated as a vhf transmitter or as a uhf transmitter. Paragraph 2.9 provides the information on rf band conversion.


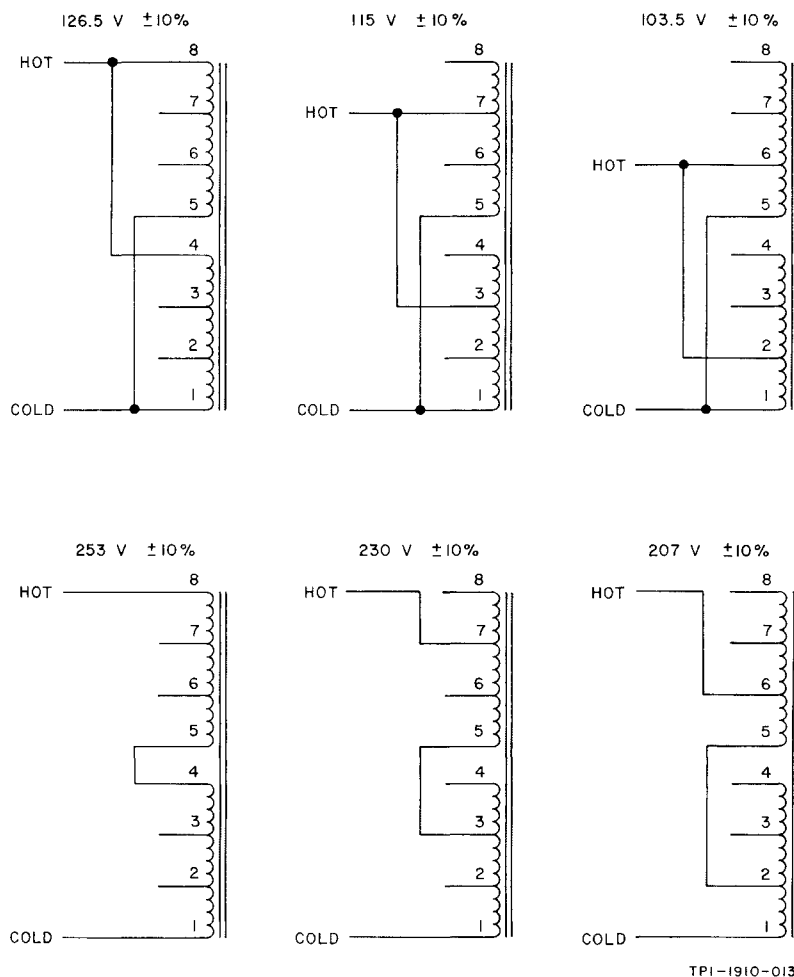


Figure 2-1. Power Supply Connections, T401 and T402.

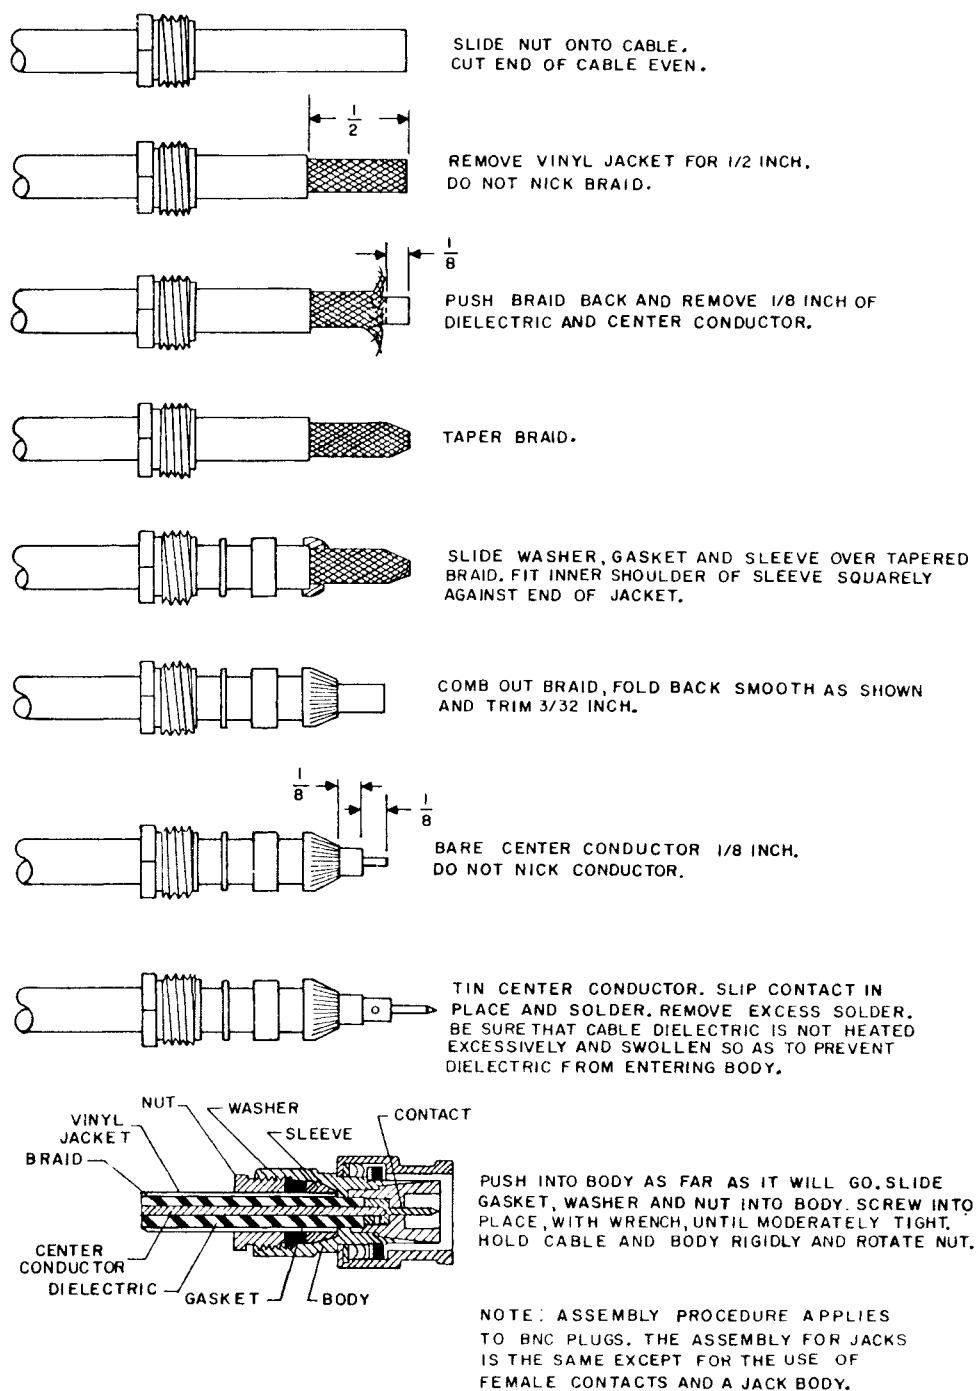

TP0-3205-017

Figure 2-2. Assembly of BNC-Type Coaxial Connector.

—

—

—