
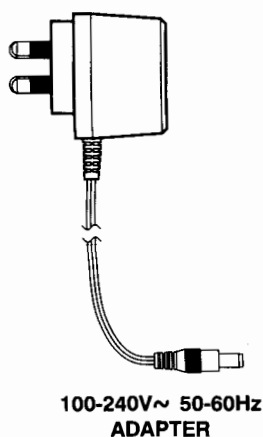



AUDIO / VIDEO MODULATOR

A. This Package Includes:

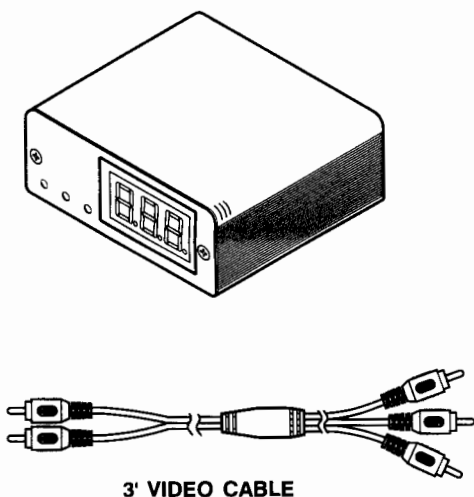


B. Modulator Installation:

<Front View>



<Back View>



100-240V~ 50-60Hz

B5



Video (Yellow)
Audio (Black)

APPLICATION (not included)

B2

2-WAY SPLITTER

RF Cable

B3

From CATV line

RF CABLE

B4

TO TV RF input

B1

AUDIO R (Red)
AUDIO L (White)
VIDEO (Yellow)


(Video/Audio Sources)



OR



OR



VCR/VCD/DVD

CAMCORDER

SECURITY CAMERA

- B1. Connect video and audio sources to RCA jacks on back of the Audio/Video Modulator with the supplied video cable.
- B2. Connect the Audio/Video Modulator RF port to output of a splitter with an RF cable.
- B3. Connect the other splitter output to CATV line.
- B4. Connect splitter input to RF input of TV.
- B5. Connect the 6V 500mA power jack to 100-240V~ 50-60Hz power source with the supplied adapter.

C. Channel Programming Steps:

Step 1:

Use a needle or a pointed object to press down the "SET" button until a displayed number is flashing.
(See the following figure.)

Step 2:

Release the button, and press the "+" or "-" key to change the channel number. These two keys are enabled only when the displayed number is flashing.