

TOSHIBA



For dazzling
true colours.

x3000

- Unique image quality by NCE 3™-chip
- Attractive design
- High security by password function and panellock



LCD stands for Liquid Cristal Displays
NCE 3: Colour optimization by Toshiba
for LCD projectors



x3000

Immerse yourself
in a world of colour.

Display 0.7" LCD Chip

Resolution XGA 1,024 x 768

Brightness 3,000 ANSI-lumens

Colour reproduction 16.7 mio. colours

Contrast 600 : 1

Projection format 4 : 3 switchable to 16 : 9

Lamp 220 W (TLPLW12LAMP)

Max. lamp life up to max. 2,000 hours/
up to max. 3,000 hours in ECO mode

Lens F = 1.8 - 2.1 / f = 26.5 - 31.5 mm, manual focus and zoom

Zoom 1.2 x

Frequency (hor./vert.) 16 - 106 kHz / 50 - 85 Hz

Projection front, rear and ceiling

Digital keystone correction auto vertical +/- 30°

Picture size (diagonal) 0.84 m - 7.62 m

Projection distance 1.45 m - 11.29 m

Input signals NTSC / PAL / SECAM, 480i, 480p, 576i, 576p,
720p, 1.080i, VGA / SVGA, XGA / SXGA / UXGA (compr.)

Inputs RGB (D-sub 15), S-video, composite video (1 x RCA),
RGB audio (stereo mini jack), video / S-video audio (1 x RCA L/R)

Outputs RGB (D-sub 15), audio (stereo mini jack)

Serial interface RS-232C (mini DIN8 pin)

Power supply AC 100 - 240 V, 50 / 60 Hz

Loudspeaker 1 W mono

Dimensions (W x H x D) 288 x 92 x 247 mm


Weight 2.8 kg

Operation noise standard 34 dB / ECO mode 29 dB

Specials security-function, user logo, password,
panellock, NCE 3, with detachable control panel,
quick start / instant shut down (5 sec.), black board-function

Accessories mouse remote control with laserpointer and
batteries, owners manual (CD ROM), quick reference, RGB and
power cable, softcase

Options ceiling mounting, trolley, spare lamp, camera c001

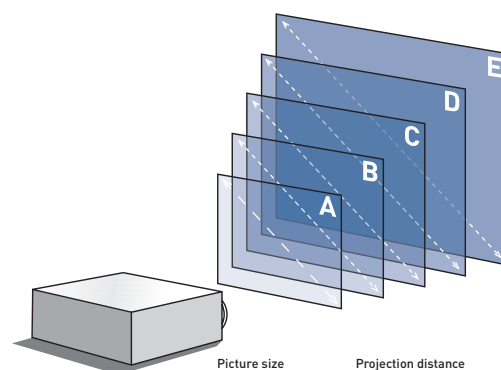

Picture size	Projection distance
A 0.84 m	1.45 m
B 1.52 m	2.21 - 2.66 m
C 2.54 m	3.72 - 4.47 m
D 5.08 m	7.51 - 9.01 m
E 7.62 m	11.29 m