
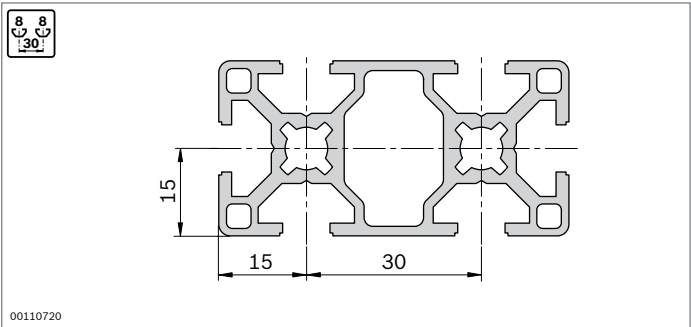


Strut profiles with 8 mm slot





Strut profiles with 8 mm slot for medium loads, such as material shuttles, light fixtures, frames and partition walls.

The 30x60x60 profile for constructing showcases and flow racks. Attractive covers and hoods can be designed with radius profiles.

Slot, modular dimensions, central bore

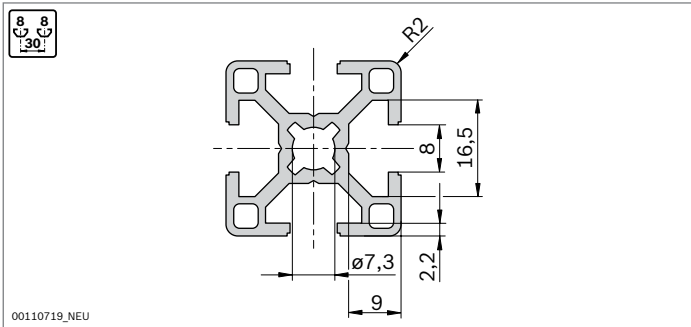

Profile finishing




Minimum profile lengths (mm) for Quick & Easy standard profile finishes on one or both sides

	-	M8	D7.8	D11/DB11
-	50	50	50	50
M8	50	80	62	70
D7.8	50	62	60	50
D11/DB11	50	70	50	60

30x30

A = 3,1 cm²
I_x = 2,8 cm⁴
I_y = 2,8 cm⁴
W_x = 1,8 cm³
W_y = 1,8 cm³
m = 0,9 kg/m




Cover cap	Color	ESD		No.
30x30 (1x)	Signal grey		100	3 842 548 744
30x30 (1x)	Black		20	3 842 548 745
Material:		PP		

Cover cap with hole	Color	ESD		No.
30x30 (1x)	Signal grey		20	3 842 548 774
30x30 (1x)	Black		20	3 842 548 775
Material:		PP		

30x30 1N


A = 3,7 cm²
I_x = 3,1 cm⁴
I_y = 3,5 cm⁴
W_x = 2,0 cm³
W_y = 2,3 cm³
m = 1,0 kg/m



Cover cap: See 30x30

30x30 2N

A = 3,7 cm²
I_x = 3,1 cm⁴
I_y = 3,5 cm⁴
W_x = 2,0 cm³
W_y = 2,3 cm³
m = 1,0 kg/m



Cover cap: See 30x30

30x30	L (mm)	No.
1 unit 	50 ... 5600	3 842 990 720 / L
1 unit M8 	50 ... 5600	3 842 990 721 / L
1 unit M8  M8	80 ... 5600	3 842 990 723 / L
1 unit M8  D11	70 ... 5600	3 842 990 724 / L
1 unit D7,8  D7,8	60 ... 5600	3 842 992 965 / L
1 unit D11 	50 ... 5600	3 842 990 722 / L
1 unit D11  D11	60 ... 5600	3 842 990 725 / L
1 unit D11  D11V	60 ... 5600	3 842 990 726 / L
 20 units 	5600	3 842 509 178

Quick & Easy (p. 2-8, see fold-out section)

30x30	3 842 993 703 / ...
Length L (mm)	50 ... 5600
Standard profile finishes (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Customized profile finishes (L _{max} = 4900 mm)	DI / DIS / MT / MTS / MI / MIS / DG ¹⁾

¹⁾ DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30 1N	L (mm)	No.
1 unit 	50 ... 5600	3 842 992 397 / L
 20 units 	5600	3 842 506 948

Quick & Easy (p. 2-8, see fold-out section)

30x30 1N	3 842 993 704 / ...
Length L (mm)	50 ... 5600
Standard profile finishes (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Customized profile finishes (L _{max} = 4900 mm)	DI / DIS / MT / MTS / MI / MIS / DG ¹⁾

¹⁾ DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30 2N	L (mm)	No.
1 unit 	50 ... 5600	3 842 992 399 / L
 20 units 	5600	3 842 506 950


Quick & Easy (p. 2-8, see fold-out section)

30x30 2N	3 842 993 705 / ...
Length L (mm)	50 ... 5600
Standard profile finishes (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Customized profile finishes (L _{max} = 4900 mm)	DI / DIS / MT / MTS / MI / MIS / DG ¹⁾

¹⁾ DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30 2NVS

$A = 3,5 \text{ cm}^2$
 $I_x = 3,1 \text{ cm}^4$
 $I_y = 3,1 \text{ cm}^4$
 $W_x = 2,0 \text{ cm}^3$
 $W_y = 2,0 \text{ cm}^3$
 $m = 1,0 \text{ kg/m}$




19181

Cover cap: See 30x30

30x30 3N

$A = 3,3 \text{ cm}^2$
 $I_x = 3,1 \text{ cm}^4$
 $I_y = 2,8 \text{ cm}^4$
 $W_x = 2,3 \text{ cm}^3$
 $W_y = 2,1 \text{ cm}^3$
 $m = 0,9 \text{ kg/m}$




19182

Cover cap: See 30x30

30x30°

$A = 3,7 \text{ cm}^2$
 $I_x = 3,5 \text{ cm}^4$
 $I_y = 3,6 \text{ cm}^4$
 $W_x = 2,0 \text{ cm}^3$
 $W_y = 1,9 \text{ cm}^3$
 $m = 1,0 \text{ kg/m}$



19183

Cover cap	Color	ESD	No.
30x30° (1x)	Black	20	3 842 524 050

Material: PA

30x30 2NVS	L (mm)	No.
1 unit	50 ... 5600	3 842 992 398 / L
20 units	5600	3 842 506 949

Quick & Easy (p. 2-8, see fold-out section)

30x30 2NVS	3 842 993 706 / ...
Length L (mm)	50 ... 5600
Standard profile finishes (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Customized profile finishes ($L_{\max} = 4900 \text{ mm}$)	DI / DIS / MT / MTS / MI / MIS / DG ¹⁾

¹⁾ $DG_{\max} = 45^\circ$; $L_{\min1} / L_{\min2} = 352 / 404 \text{ mm}$

30x30 3N	L (mm)	No.
1 unit	50 ... 5600	3 842 992 400 / L
20 units	5600	3 842 506 951

Quick & Easy (p. 2-8, see fold-out section)

30x30 3N	3 842 993 707 / ...
Length L (mm)	50 ... 5600
Standard profile finishes (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Customized profile finishes ($L_{\max} = 4900 \text{ mm}$)	DI / DIS / MT / MTS / MI / MIS / DG ¹⁾

¹⁾ $DG_{\max} = 45^\circ$; $L_{\min1} / L_{\min2} = 352 / 404 \text{ mm}$

30x30°	L (mm)	No.
1 unit	50 ... 5600	3 842 993 010 / L
20 units	5600	3 842 524 031

Quick & Easy (p. 2-8, see fold-out section)

30x30°	3 842 993 708 / ...
Length L (mm)	50 ... 5600
Standard profile finishes (note minimum length, p. 2-16)	M8
Customized profile finishes	—