


Standard Lengths	Type No.	Finish
2"	55D2CB	Anodised
4"	55D4CB	Anodised -
6"	55D6CB	Anodised
8"	55D8CB	Anodised
36"	55D36C	Plain
72"	55D72C	Plain



50mm 50HS-55D With T03 Plain or Anodized

Custom processing to order


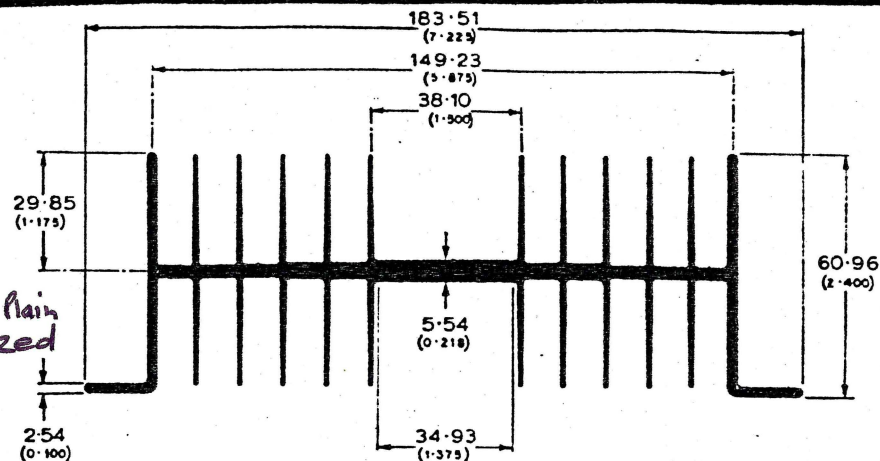


Dimensions in mm.
Inch conversions in brackets.

Scale 1:2

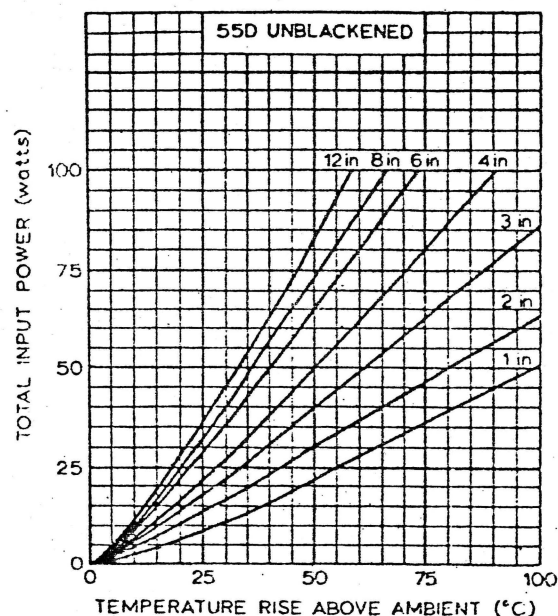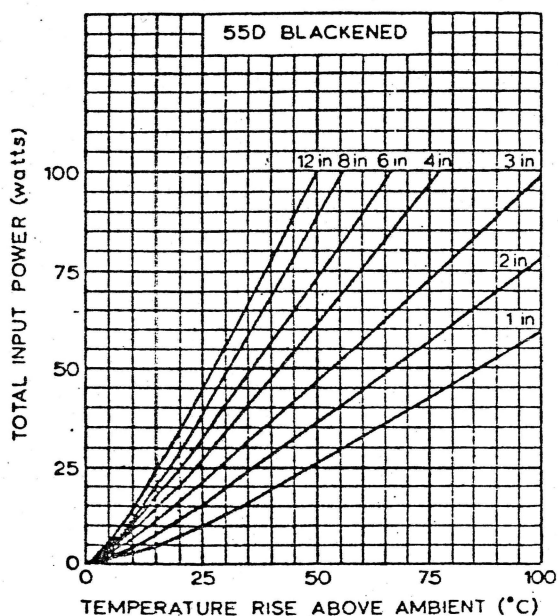

Total input power versus rise above ambient temperature for various lengths of extrusion with natural convection cooling.

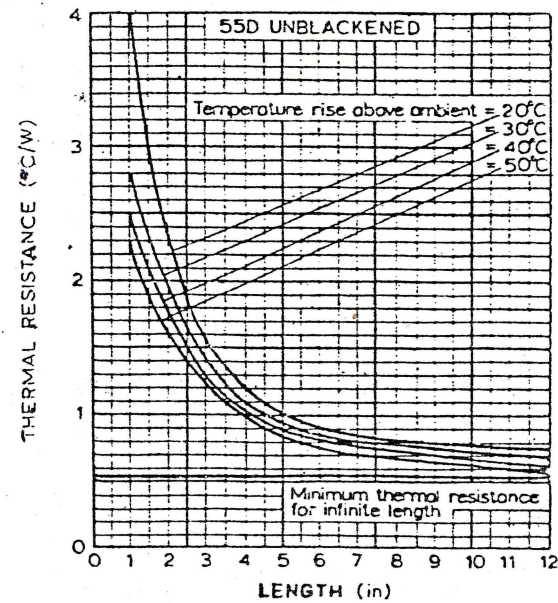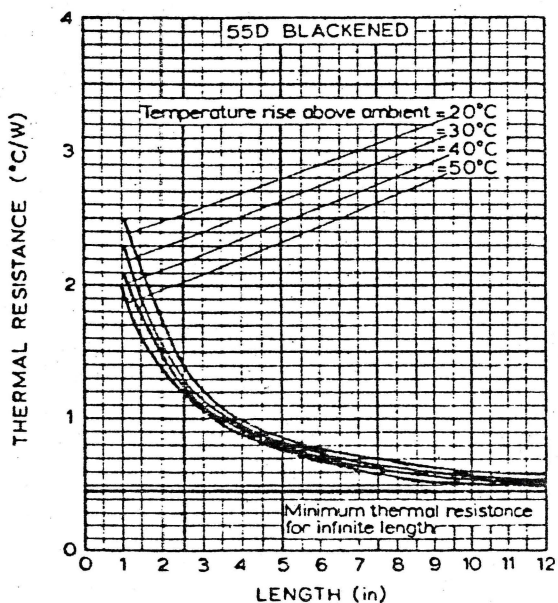

Thermal resistance versus extrusion length, for various rises above ambient temperature and with natural convection cooling.

Processed and distributed by:-



modular systems ltd.

P.O. Box 30-028

Lower Hutt, New Zealand

Telephone 687-277, Wellington

FAX (04) 685 161 911