
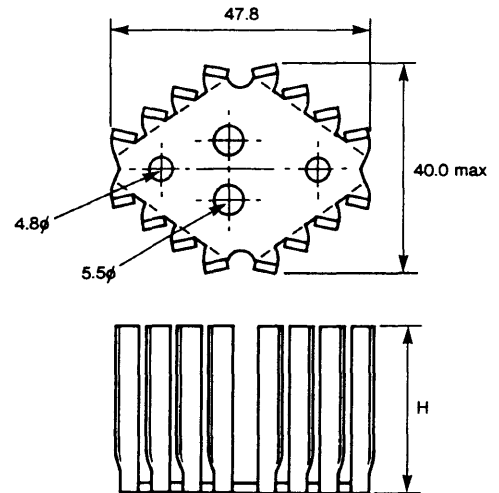






PF515 PF516 Heatsink - T03

Space saving design together with good thermal efficiency. Available in two fin heights.
 Finish: Black anodised.

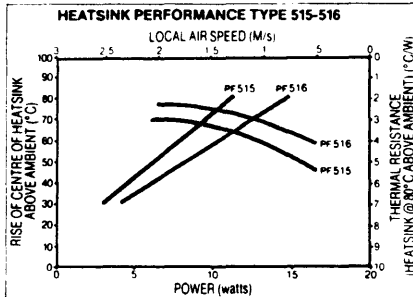




PF523 PF526 PF527 Heatsink - T03

Space saving heatsinks clamp over T03 case without disturbing the device connections and using almost no additional board space.
 Finish: Black anodised.

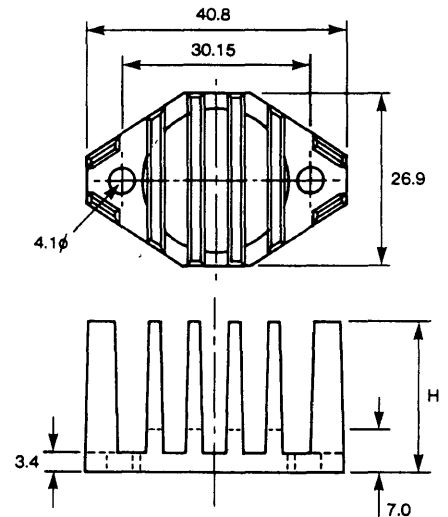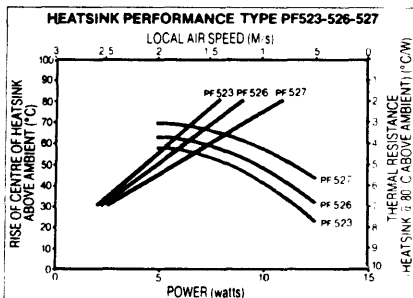

AV16 Heatsink - T03 AV17 Heatsink - T0220 (x 2)

4 sided heatsink with alternate sloping vanes designed for maximum dissipation surface and low unit cost.
 Finish: Black anodised

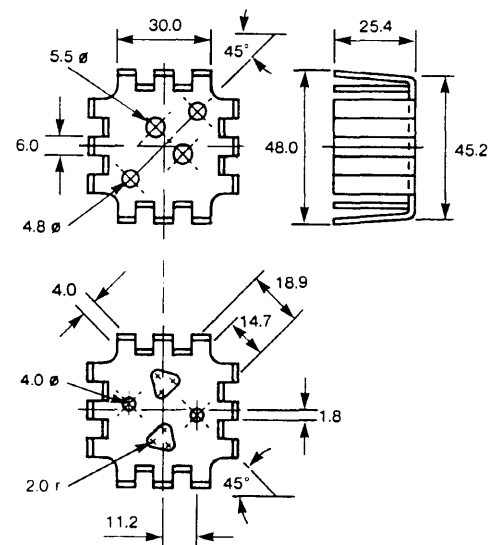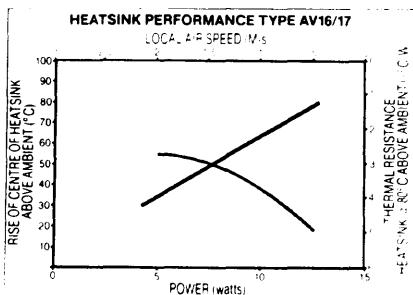

Standard Hole Patterns

TO3


Available in all standard lengths of the following powersink types:

L LA MA MB MD ME MH MK Q T W Y

To order, add -2 to the length/type code.


e.g. 4L-2 6W-2 etc.

M type is also available but should be ordered as 2M-16 etc.

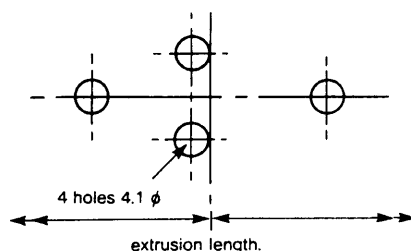

2 x T03

Length 'L'	Dimn 'A'
100mm	26.3
4"	27.1
6"/150mm	46.2

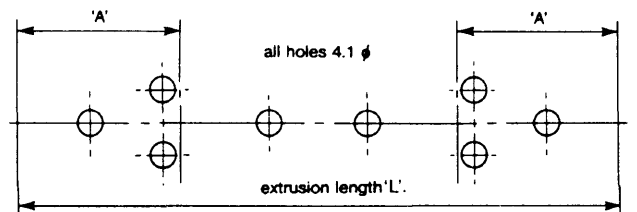


Available in standard lengths of the following types:

L LA M MA MB MD ME MH MK Q T W

To order, add -4 to the length/type code.
e.g. 4Q-4 MK150-4 etc.

2 x T03 (Y)

Dimn 'A'
3.5Y-4 21.5
4Y-4 27.8
6Y-4 43.6

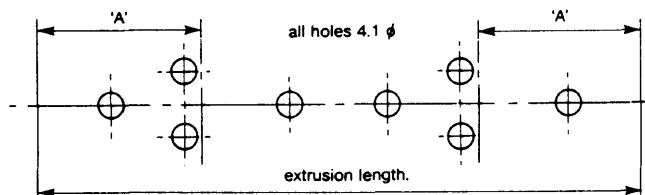


TO66


3M-3 4M-3

2Y-3 3Y-3 3.5Y-3 4Y-3

TO66 hole pattern in other lengths and extrusions to order.

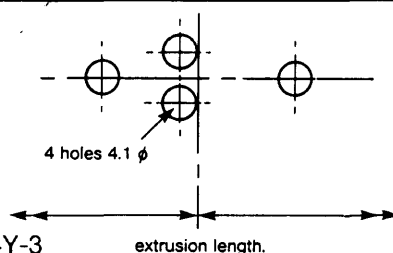


TO3 (MG)

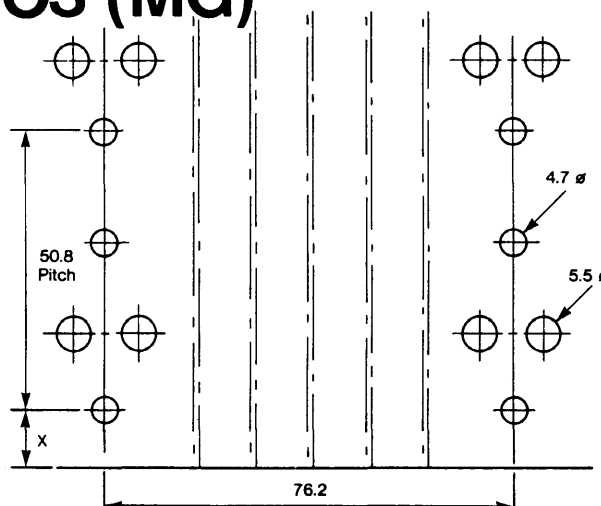

3MG-8	(2 x TO3) x = 23
4MG-10	(4 x TO3) x = 10.3
6MG-14	(6 x TO3) x = 10.3
8MG-22	(8 x TO3) x = 10.3

TO220 (MC)

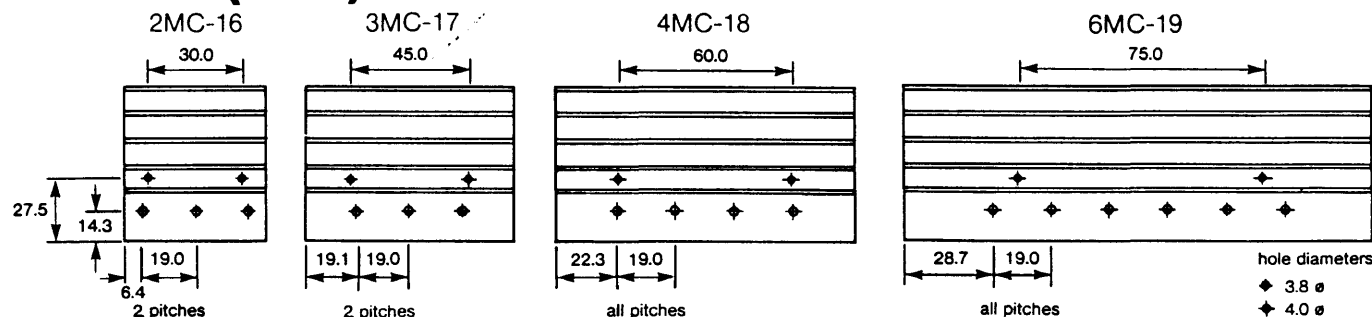

Installation Notches

Standard installation notches available in types P PC and PD
Number of notches and position to order.

