



A professional style of resistor that is also widely used in consumer equipment. It meets the high standards required for test and measuring equipment and for communications equipment etc. The lacquer is non-flammable and is resistant to all the usual cleansing solvents.

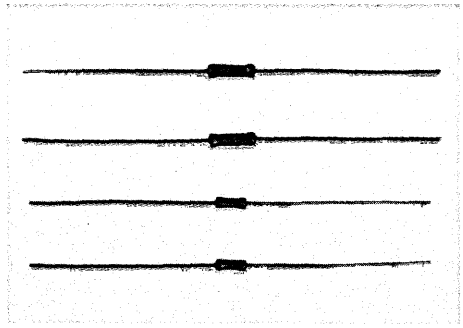

style	D _{max}	L _{max}	l	d	a _{max}
MR25	2,5	6,5	28 ± 2	0,6	1
MR30	3	10	28 ± 2	0,6	1
MR52	5,2	16,5	38 ± 3	0,6	1




Nomogram to find style or stability

Example

What is the stability of a 1 kΩ metal film resistor, style MR25, operating at 0,33 W in an ambient of 60 °C? Find 0,33 W on MR25 style column. Follow the line right, down, left, to where it intersects the 1000 h line.

$\Delta R/R$ is 0,28% over 1000 working hours.

Use the reverse procedure to find right style for a given stability and dissipation.

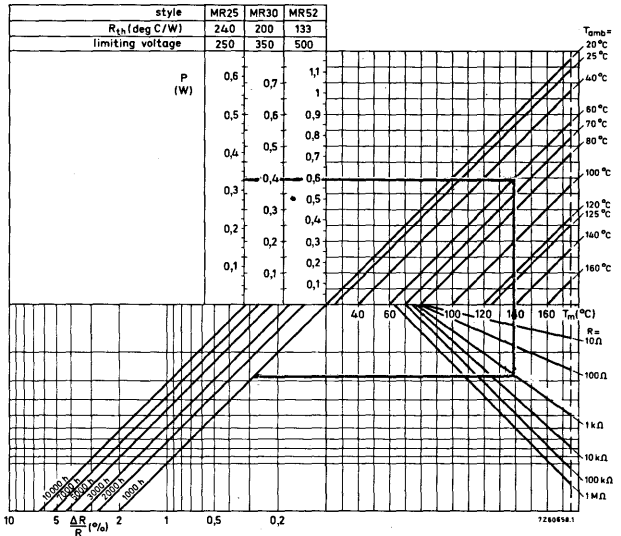


fixed resistors

metal film - lacquered

MR25 MR30 MR52

Resistance ranges	from 1 Ω to 1 MΩ E24, E96 and E192 series
Resistance tolerance	± 0,5, ± 1, ± 2, ± 5%
Temperature coefficient	± 50, ± 100, ± 200 ppm/°C
Abs. max. dissipation at T _{amb} = 70 °C	MR25 0,4 W MR30 0,5 W MR52 0,75W
Basic specification	IEC 115-1
Climatic category (IEC68)	55/155/56
Stability after load	see nomogram

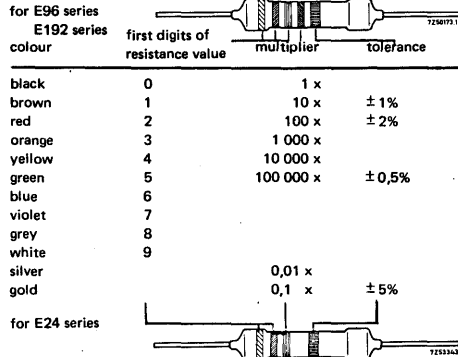

style	limiting voltage (r.m.s) V	rated dissipation at 70 °C W	resistance range	tolerance ± %	series	temperature coefficient ± ppm/°C	catalogue no. 2322 followed by
MR25	250	0,4	4,99 Ω - 681 kΩ	0,5	E192	50 ¹⁾	151 7
	250		4,99 Ω - 681 kΩ	1	E96 + E24	50 ¹⁾	151 5
	250		1 Ω - 680 kΩ	2	E24	100	151 4
	250		1 Ω - 680 kΩ	5	E24	200	151 6
MR25 on reel	250		4,99 Ω - 681 kΩ	1	E96	50 ¹⁾	151 2
	250		1 Ω - 680 kΩ	2	E24	100	151 1
	250		1 Ω - 680 kΩ	5	E24	200	151 3
MR30	350	0,5	4,99 Ω - 1 MΩ	0,5	E192	50 ¹⁾	152 7
	350		4,99 Ω - 1 MΩ	1	E96 + E24	50 ¹⁾	152 5
	350		5,1 Ω - 1 MΩ	2	E24	100	152 4
	350		5,1 Ω - 1 MΩ	5	E24	200	152 6
MR30 on reel	350		4,99 Ω - 1 MΩ	1	E96	50 ¹⁾	152 2
	350		5,1 Ω - 1 MΩ	2	E24	100	152 1
	350		5,1 Ω - 1 MΩ	5	E24	200	152 3
MR52	500	0,75	4,99 Ω - 1 MΩ	1	E96	100	153 5

Composition of the catalogue no.

2322

Style code
see table

Tolerance code
7 for ± 0,5%
2 or 5 for ± 1%
1 or 4 for ± 2%
3 or 6 for ± 5%

Resistance code: first three figures of the resistance value followed by

8 for R of 1 to 9,76 Ω
9 for R of 10 to 97,6 Ω
1 for R of 100 to 976 Ω
2 for R of 1 to 9,76 kΩ
3 for R of 10 to 97,6 kΩ
4 for R of 100 to 976 kΩ
5 for R of 1 MΩ

¹⁾ For values < 49,9 Ω: 100 ppm/°C.

Example

The catalogue no. of an MR30 resistor of 3650 Ω with a tolerance of 1% is 2322 152 53652.