

HIGH EFFICIENCY FAST RECOVERY RECTIFIER DIODES


FEATURES

- SUITED FOR SMPS
- VERY LOW FORWARD LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY
- INSULATED VERSION TOP3I:
Insulating voltage = 2500 V DC
Capacitance = 12 pF

DESCRIPTION

Dual center tap rectifier suited for switchmode power supply and high frequency DC to DC converters.

Packaged in SOT93, or TOP3I this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

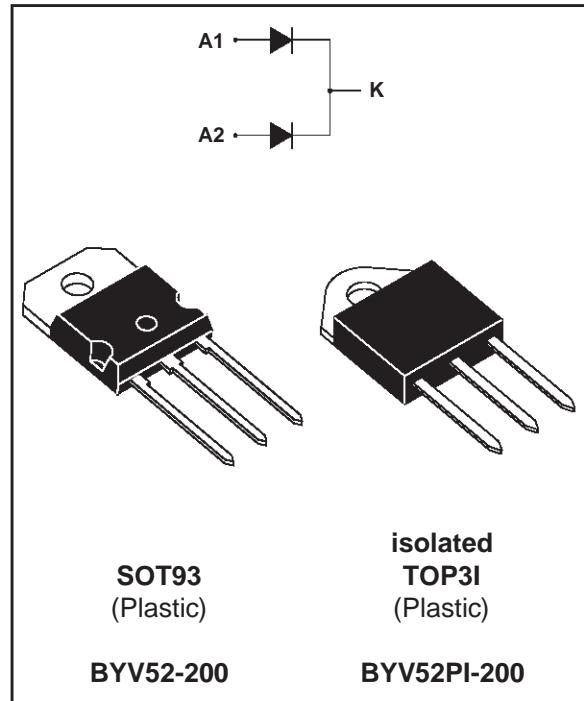

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter				Value	Unit
$I_{F(RMS)}$	RMS forward current		Per diode		50	A
$I_{F(AV)}$	$\delta = 0.5$	Average forward current	SOT93	T _c =110°C	Per diode	30
			TOP3I	T _c =90°C	Per diode	30
I_{FSM}	Surge non repetitive forward current		tp=10ms sinusoidal	Per diode	500	A
T_{stg} T_j	Storage and junction temperature range				- 40 to + 150	°C
					- 40 to + 150	°C

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	200	V

BYV52/PI

THERMAL RESISTANCE

Symbol	Parameter			Value	Unit
Rth (j-c)	Junction to case	SOT93	Per diode	1.2	°C/W
			Total	0.75	
	TOP3I		Per diode	1.8	
			Total	1.2	
Rth (c)	Coupling	SOT93		0.3	°C/W
		TOP3I		0.6	

When the diodes 1 and 2 are used simultaneously :

$$T_j - T_c \text{ (diode 1)} = P(\text{diode 1}) \times R_{\text{th(j-c)}} \text{ (Per diode)} + P(\text{diode 2}) \times R_{\text{th(c)}}$$

ELECTRICAL CHARACTERISTICS (Per diode)

STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
I _R *	T _j = 25°C	V _R = V _{RRM}			25	μA
	T _j = 100°C				2.5	mA
V _F **	T _j = 125°C	I _F = 20 A			0.85	V
	T _j = 125°C	I _F = 40 A			1.00	
	T _j = 25°C	I _F = 40 A			1.15	

Pulse test : * tp = 5 ms, duty cycle < 2 %

** tp = 380 μs, duty cycle < 2 %

To evaluate the conduction losses use the following equation :

$$P = 0.7 \times I_{F(AV)} + 0.0075 \times I_{F}^2(\text{RMS})$$

RECOVERY CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
trr	T _j = 25°C	I _F = 0.5A I _R = 1A	I _{rr} = 0.25A		35	ns
		I _F = 1A V _R = 30V	dI _F /dt = -50A/μs		50	
tfr	T _j = 25°C	I _F = 1A V _{FR} = 1.1 x V _F	tr = 5 ns	10		ns
V _{FP}	T _j = 25°C	I _F = 1A	tr = 5 ns	1.5		V

Fig.1 : Average forward power dissipation versus average forward current.

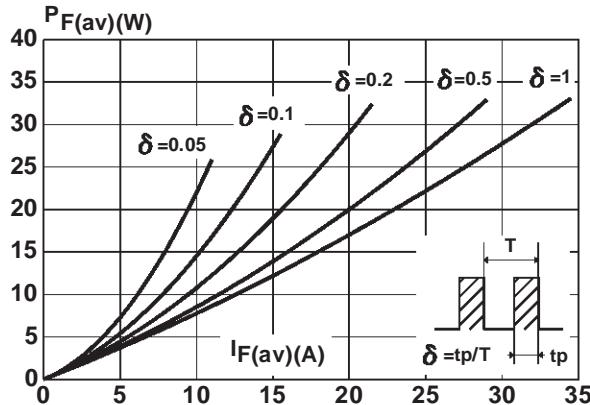


Fig.3 : Forward voltage drop versus forward current (maximum values).

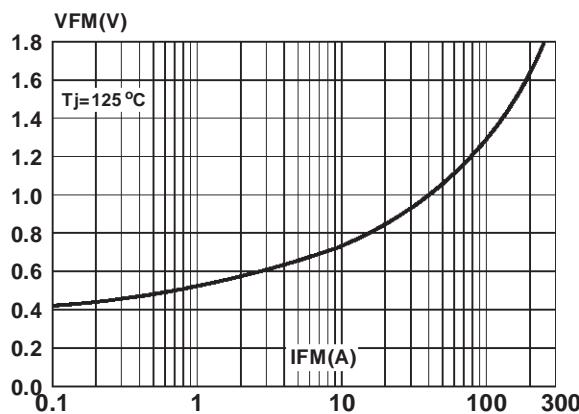


Fig.5 : Non repetitive surge peak forward current versus overload duration.
(SOD93)

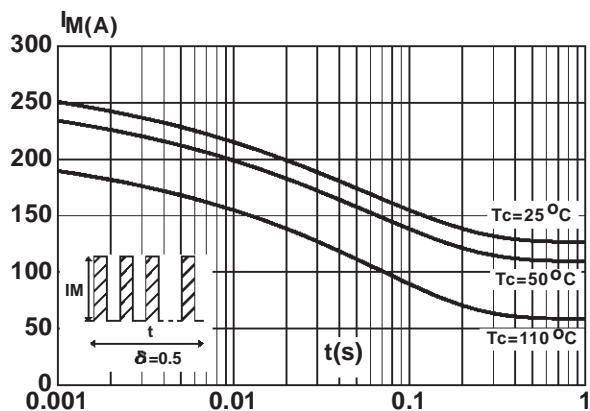


Fig.2 : Peak current versus form factor.

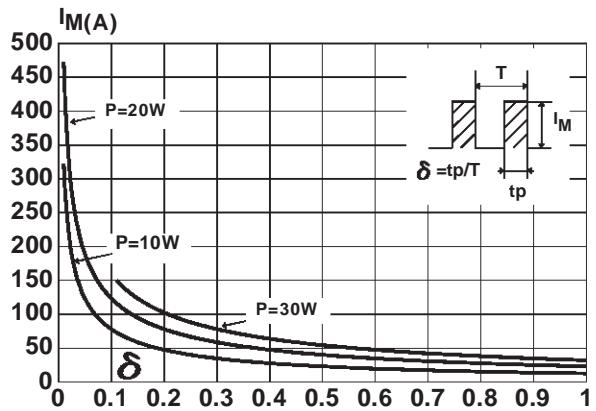


Fig.4 : Relative variation of thermal impedance junction to case versus pulse duration.


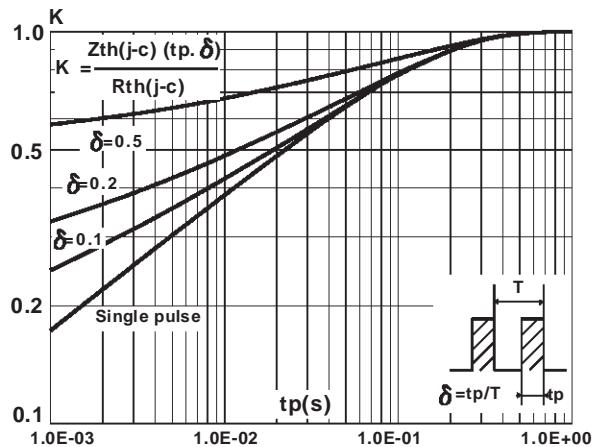


Fig.6 : Non repetitive surge peak forward current versus overload duration.
(TOP3I)

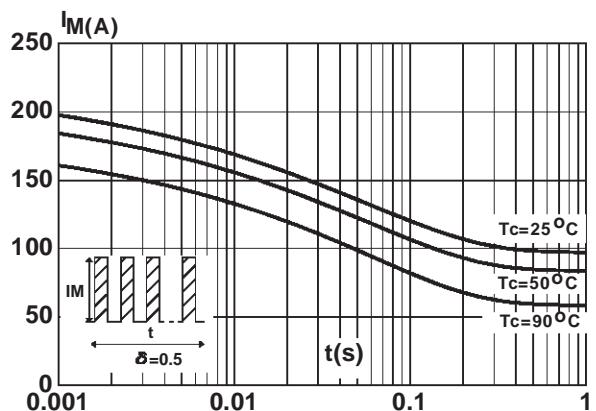

BYV52/PI

Fig.7 : Average current versus ambient temperature.
(duty cycle : 0.5) (SOD93)

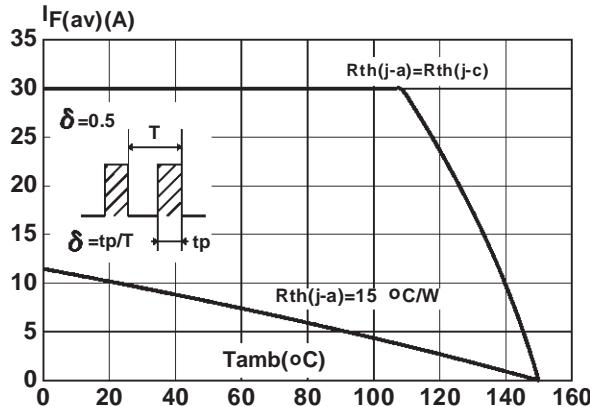


Fig.9 : Junction capacitance versus reverse voltage applied (Typical values).

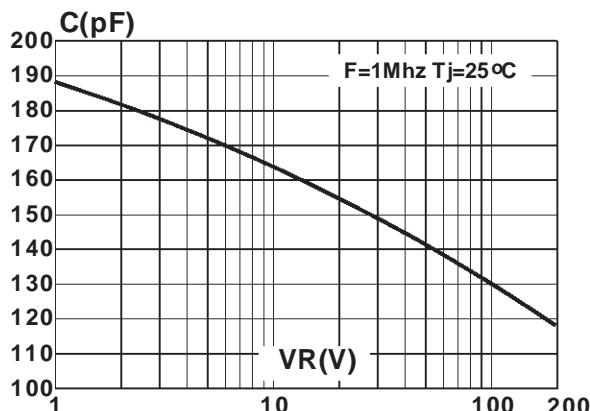


Fig.11 : Peak reverse current versus dI_F/dt .

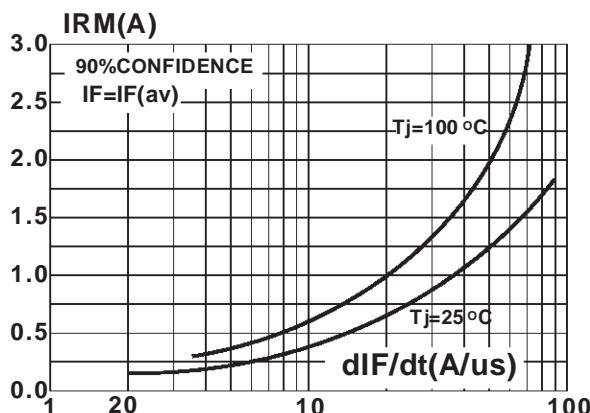


Fig.8 : Average current versus ambient temperature.
(duty cycle : 0.5) (TOP3I)

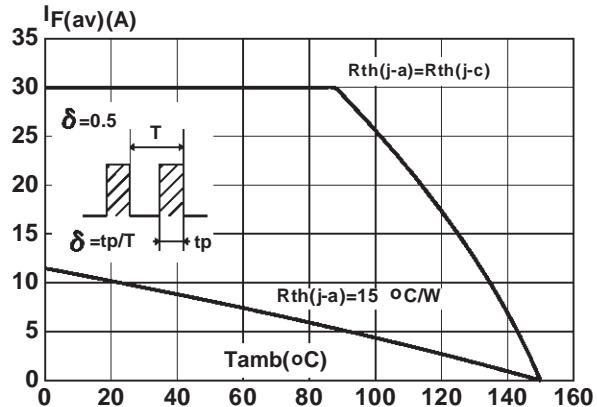


Fig.10 : Recovery charges versus dI_F/dt .



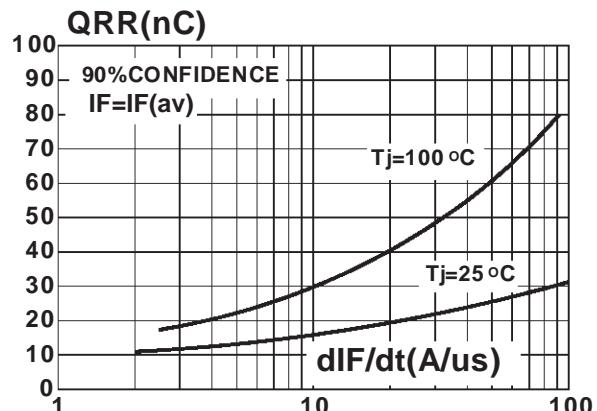


Fig.12 : Dynamic parameters versus junction temperature.

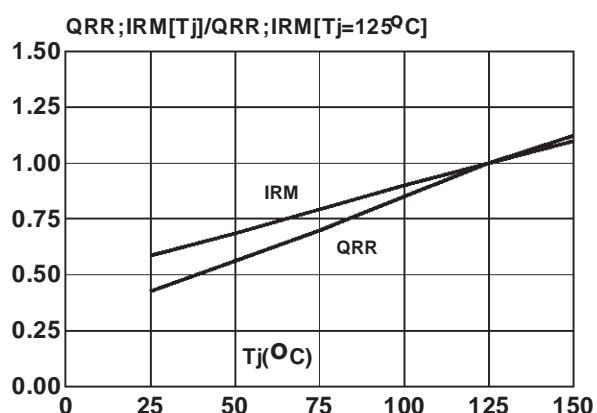

PACKAGE MECHANICAL DATA
SOD93

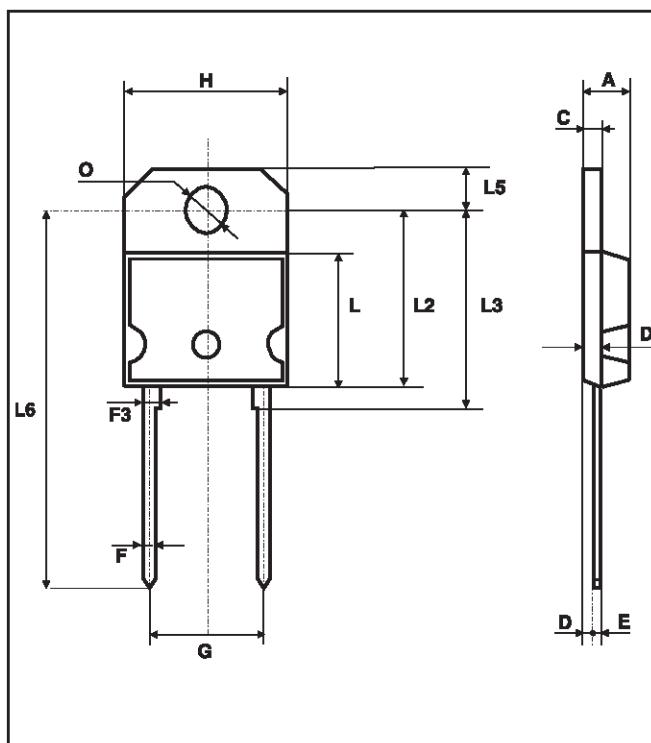

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.70		4.90	0.185		0.193
C	1.17		1.37	0.046		0.054
D		2.50			0.098	
D1		1.27			0.050	
E	0.50		0.78	0.020		0.031
F	1.10		1.30	0.043		0.051
F3		1.75			0.069	
G	10.80		11.10	0.425		0.437
H	14.70		15.20	0.578		0.598
L			12.20			0.480
L2			16.20			0.638
L3		18.0			0.709	
L5	3.95		4.15	0.156		0.163
L6		31.00			1.220	
O	4.00		4.10	0.157		0.161

- **Marking :** Type number
- **Cooling method :** C
- **Weight :** 3.79 g
- **Recommended torque value :** 0.8m.N
- **Maximum torque value :** 1.0m.N

BYV52/PI

PACKAGE MECHANICAL DATA

TOP3I (isolated)

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.6	0.173	0.181
B	1.45	1.55	0.057	0.061
C	14.35	15.60	0.565	0.614
D	0.5	0.7	0.020	0.028
E	2.7	2.9	0.106	0.114
F	15.8	16.5	0.622	0.650
G	20.4	21.1	0.815	0.831
H	15.1	15.5	0.594	0.610
J	5.4	5.65	0.213	0.222
K	3.4	3.65	0.134	0.144
L	4.08	4.17	0.161	0.164
P	1.20	1.40	0.047	0.055
R	4.60 typ.		0.181 typ.	

■ **Marking :** Type number

■ **Cooling method :** C

■ **Weight :** 4.46 g

■ **Recommended torque value :** 0.8m.N

■ **Maximum torque value :** 1.0m.N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>