




Standard Open Toroidal Transformers

80VA Open Style, with Leads.
230V Primary, Dual Secondaries

High quality open style toroidal transformers with a single 230V/50-60Hz primary winding. Twin secondary windings may be connected in series or parallel, or used independently

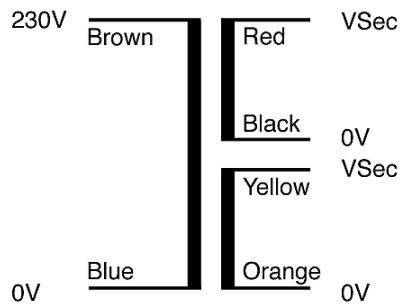

Primary 230V @ 50-60Hz
Secondary: 2 x Vsec @ 40VA Each
Suitable for Series/Parallel connection



Nuvotem Part Number	Full Load Vsec [V]	Rated Current per Sec [A]	No Load Vsec [V]	DC Resistance [Ohms] @ 25°C	DEKRA Certificate
0080P1-2-009	2 x 9	4.444	2 x 10.31	2 x 0.1642	2161054.01
0080P1-2-012	2 x 12	3.333	2 x 13.60	2 x 0.2702	2161054.01
0080P1-2-015	2 x 15	2.667	2 x 17.11	2 x 0.4247	2161054.01
0080P1-2-018	2 x 18	2.222	2 x 20.50	2 x 0.5703	2161054.01
0080P1-2-025	2 x 25	1.600	2 x 28.55	2 x 1.1433	2161054.02
0080P1-2-055	2 x 55	0.727	2 x 63.33	2 x 6.2836	2161054.02

Primary Winding	Input Voltage Range : 207V–253V (230V +/- 10%) @ 50/60Hz DC Resistance @ 25°C = Approx 28 Ohms		
Losses	Iron Losses	0.49 Watts approx	
	Copper Losses	13.8 Watts approx.	
Temperature Class	Winding Wire (Primary & Secondary)	Class H (180°C)	
	Insulation between input and output	Class B (130°C)	
	Connection lead insulation	Class A (105°C)	
Standards	Approved to UL506 & UL5085 : File E215495 Approved to EN61558 : DEKRA Certificates 2161054.01 or 2161054.02 (see table above) Conforms to EN60065, VDE0550, BS415.		
Physical Data	Approximate Dimensions	Diameter	93mm*
		Height	38mm
		* Measured away from leadout bulge; Allow extra 4mm at leads.	
	Approximate Weight	0.45 Kg	
Terminations	Primary	Solid copper conductors (extension of winding wire), insulated over entire length with 105°C PVC tubing Double-insulated over entire length with 105°C PVC tubings. 150mm Long, 10mm tinned ends.	
	Secondary	Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.	
Mounting Hardware	Each transformer is supplied with a mounting kit, comprising: Neoprene Insulating disc 2 pieces Dished Steel Washer 1 piece		

Regional Locations - Design, Manufacturing, Sales & Marketing

Talema Group Global Offices

North America

United States (Sales & Marketing)

Talema Group, LLC
PO Box 935
900 Innovation Drive
Suite 120, Rolla
Missouri 65402
Tel: +1 573-303-3675
E-Mail:
sales@talema.com
Web: talema.com

Asia

India (Design, Manufacturing, Sales & Marketing)

Administrative Office

Talema Electronic India Private Limited
Door No. 221, 1st and 2nd Floor
KJ Plaza, Opp.to Vidya Mandir School
Meyanur Main Road
Salem - 636 004 Tamil Nadu INDIA.
Tel: +91 427 - 243 3100
Fax: +91 427 - 243 3109
E-Mail: talema@talemaindia.net
Web: talema.com

Factory Premises

Talema Electronic India Private Limited
No. 31 & 31, Electronic Industrial Estate
Suramangalam Post
Salem - 636 005 Tamil Nadu INDIA
Tel: +91 427 - 243 3000
E-Mail: talema@talemaindia.net
Web: talema.com

Europe

Germany (Design, Sales & Marketing)

Talema Elektronik GmbH
Sembdnerstr. 5
82110 Germering
Tel: +49 89 - 841 00 - 0
Fax: +49 89 - 841 00 25
E-Mail: info@talema.de
Web: talema.com

Ireland (Design, Sales & Marketing)

Nuvotem TEO
Units W & X, Gweedore Business Park
Derrybeg, Letterkenny, Co. Donegal
Tel: +353 (0) 74 95 48666
Fax: +353 (0) 74 95 48139
E-Mail: info@nuvotem.com
Web: talema.com

Czech Republic (Design, Manufacturing, Sales & Marketing)

NT Magnetics s.r.o.
Chebská 27
322 00 Plzeň
Tel: +420 377 - 338 351
Fax: +420 377 - 338 350
E-Mail: talema@talema.cz
Web: talema.com

Locations of Talema Group Global Offices

