

Brand: Minertia (Yasakawa - Japan)

OEM #: 700432-1~8 (typical)

Frame: Round/Circular

Volts: 22.5Vdc (nominal)

Current: 6? Amp

Output: 150? Watts (nominal)

RPM: _____ @ 22.5V (no-load)

Torque: ___ Nm @ ___A (___ oz.in.)

Rating: continuous

Resistance: ___ Ohms / phase (nominal)

Wires: 2 wire (100mm nominal)

Shaft: 9.6 mm dia x 26mm long

Shaft-Detail: Plain + 1 flats

Size: 70 x 135mm (nominal)

Encoder / Tachometer: _____? _____ line

Wires: 4 wire (900mm + nominal)

Condition: Used (refurbished / tested)

Weight: 2.0kg

Comments: xxxxxx pps = 1000rpm




<http://www.casa.co.nz>

Edition: 07/07/2011

Permanent-Magnet DC Motor


Type: TO3L-TL11

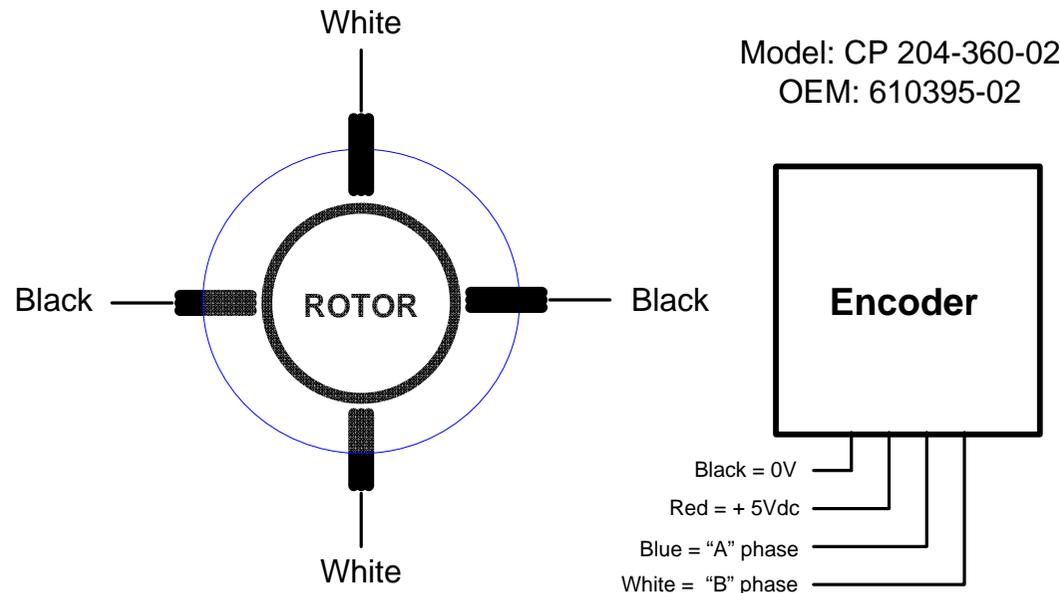

Note: from a Gecko-320 this motor delivers 1000rpm when 'speed' set to xxxxpps



Not registered



NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.