



# Permanent Magnet DC Motor & Gearbox

## Type: 27R-12Vdc-PL11-216-1-Escap26



<http://www.casa.co.nz>

Edition: 29/06/2012

**Stock #**  
144

### General Data

**Type:** PL11-216-1- Escap 26

**Brand:** Portescap Switzerland

**Style:** 26mm diameter motor

**OEM #:** 2867

**Frame:** 26mm flange

**Voltage:** 12 Vdc.

**Current:** 0.1A(int.)

**Output:** 1.2 Watts (estimated)

**Voltage-Constant:** ?

**RPM:** 27

**Torque:** \_\_\_\_ inch lb.@ \_\_\_\_

**Rating:** Intermittent duty.

**Resistance:** 9.5 Ohms (nominal)

**Inductance:** NA mH

**Connector:** None

**Wires:** 2 x 110mm

**Shaft:** 3mm dia x ?mm long motor

**Shaft:** 6.3mm x 11mm gearbox

**Shaft-Detail:** Plain, single flatted.

**Size:** 26mm dia. (motor) x 45mm (nominal)

**Gearbox:** 62 x 50mm. 200:1 (RG 1/9.1200)

**Weight:** 250 g.

**Encoder:** NA


**Wires:** NA

**Condition:** Used

**Comments:** Tape loader spigot on output shaft.

**Stall-Current** (test-only):

1.2 A @ 12 V

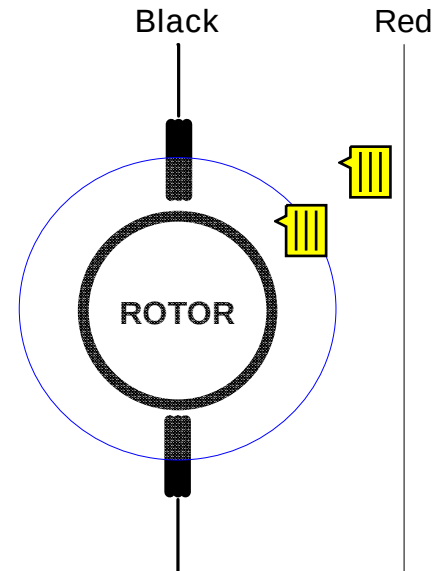

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.