

Stepping Motor



Type: **103-775-4141**

<http://www.casa.co.nz>

Edition: 11/07/2011



Not registered

General Data

Type: 103-775-4141

Brand: Step-Sys (Sanyo-Denki)

OEM #: 103-775-4141

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 1 Amp

Volts: 4.2 Vdc

Torque: ____ Nm @ ____ A (____ oz.in.)

Resistance: 3.9 Ohms / phase (nominal)

Inductance: 4.4 mH / phase (nominal)

Connector: 6 way x 0.1" (see diag.)

Wires: 6 wire (450 mm nominal)

Shaft: 6.35 mm dia x 13 mm long

Shaft-Detail: Plain + gear


Size: 56 x 56 x 41 mm (nominal)

Weight: 0.37kg

Supply-Max: 24~80 Vdc
(recommended max = V x 25)

Condition: Used (refurbished)

Comments: Optional timing belt pulley 17mm dia (nominal)

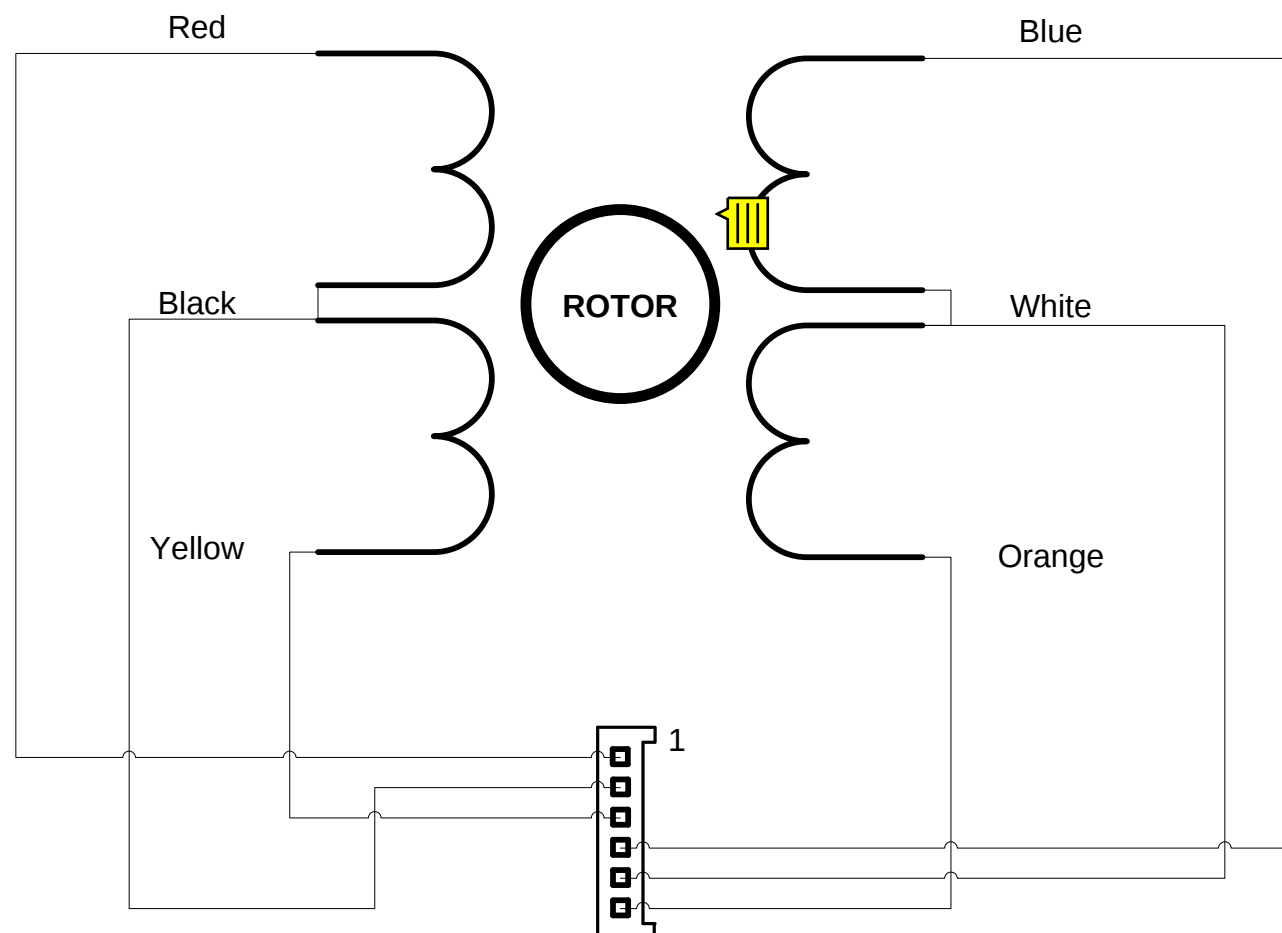

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.