

Stepping Motor



<http://www.casa.co.nz>

Edition: 18/05/2012

Type: 103G770-0158



12345-wizard.com

General Data

Brand: Step-Syn (Sanyo-Denki)

OEM #: 103G770-0158

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 1.0 Amp

Volts: 5.1 Vdc

Torque: ___ Nm @ ___ A (___ oz.in.)

Resistance: 5.2 Ohms / phase (nominal)

Inductance: 9 mH / phase (nominal)

Connector: 6 way x 0.1" Molex MXO (see diag.)

Wires: 6 wire (250mm nominal)

Shaft: 6.35mm dia x 20mm long

Shaft-Detail: Plain

Size: 56 x 56 x 53mm (nominal)


Wires: 6 wire (250mm nominal)

Supply-Max: 5~80Vdc (recommended max = V x 25)

Weight: 0.52kg

Condition: Used (refurbished)

Comments: Resilient mount and/or cable winding pulley may be available.

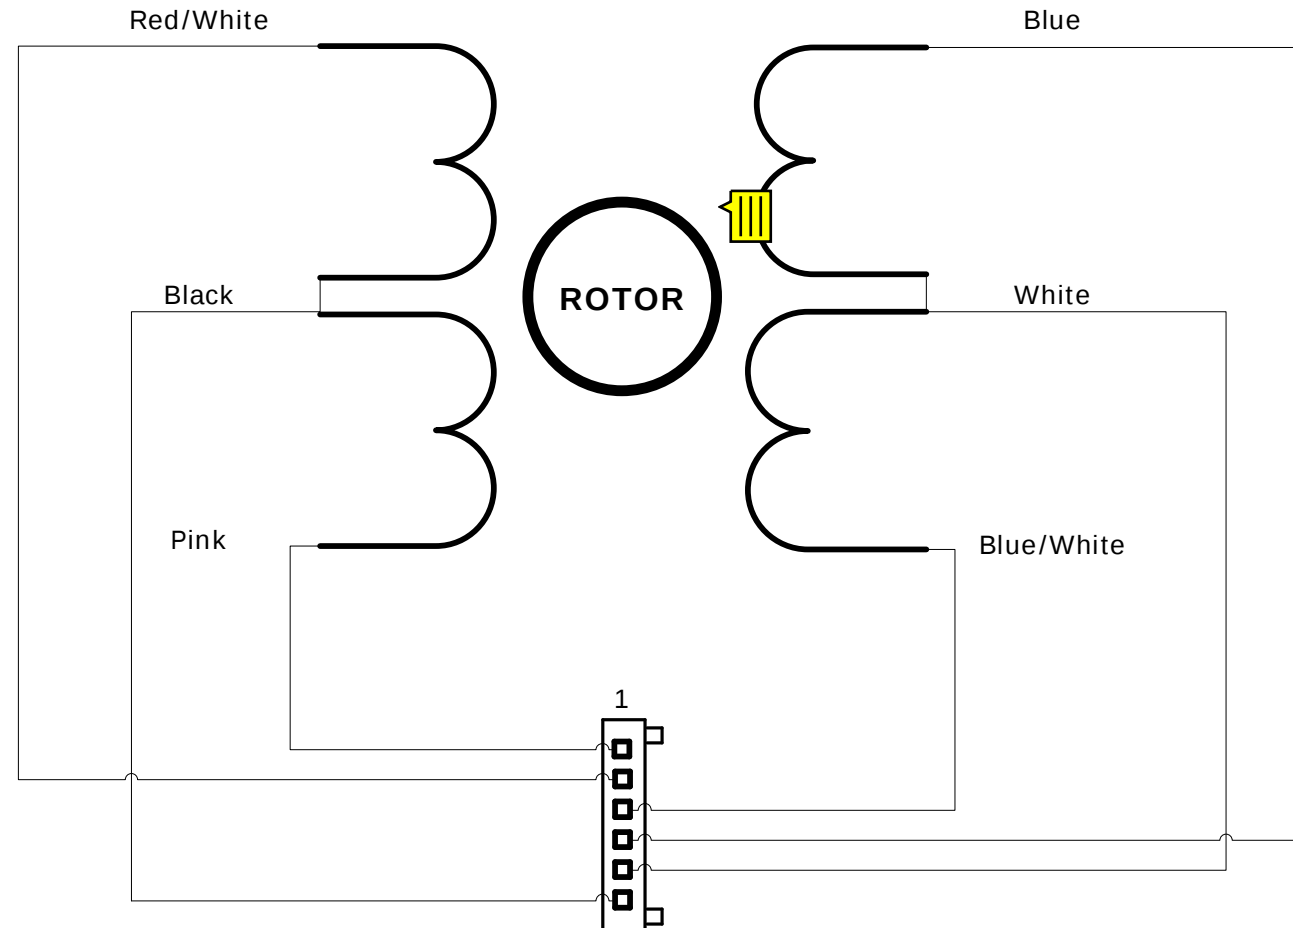

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.