



Stepping Motor



Type: **103G770-2211**

<http://www.casa.co.nz>

Edition: 7/01/2020

General Data

Brand: Step-Syn (Sanyo-Denki - Japan)
OEM #: 103G770-2211

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 2.0 Amp

Volts: 2.8 Vdc

Torque: ___ Nm @ ___ A (___ oz.in.)

Resistance: 1.4 Ohms / phase (nominal)

Inductance: 2.2 mH / phase (nominal)

Connector: 8 way x 0.1" Molex MXO or JST (if fitted - see diag.)

Wires: 8 wire (150mm nominal may be fitted with terminating connector or a 200mm extension cable assembly)

Shaft: 6.35mm dia x 19mm long
(double-ended) – optional collet knob

Shaft-Detail: Plain


Size: 56 x 56 x 52mm (nominal)

Supply-Max: 24~80Vdc (recommended max = V x 25)

Weight: 0.53kg (nominal)

Condition: Used (refurbished)

Notes: 12.5mm xxT toothed gear may be available.

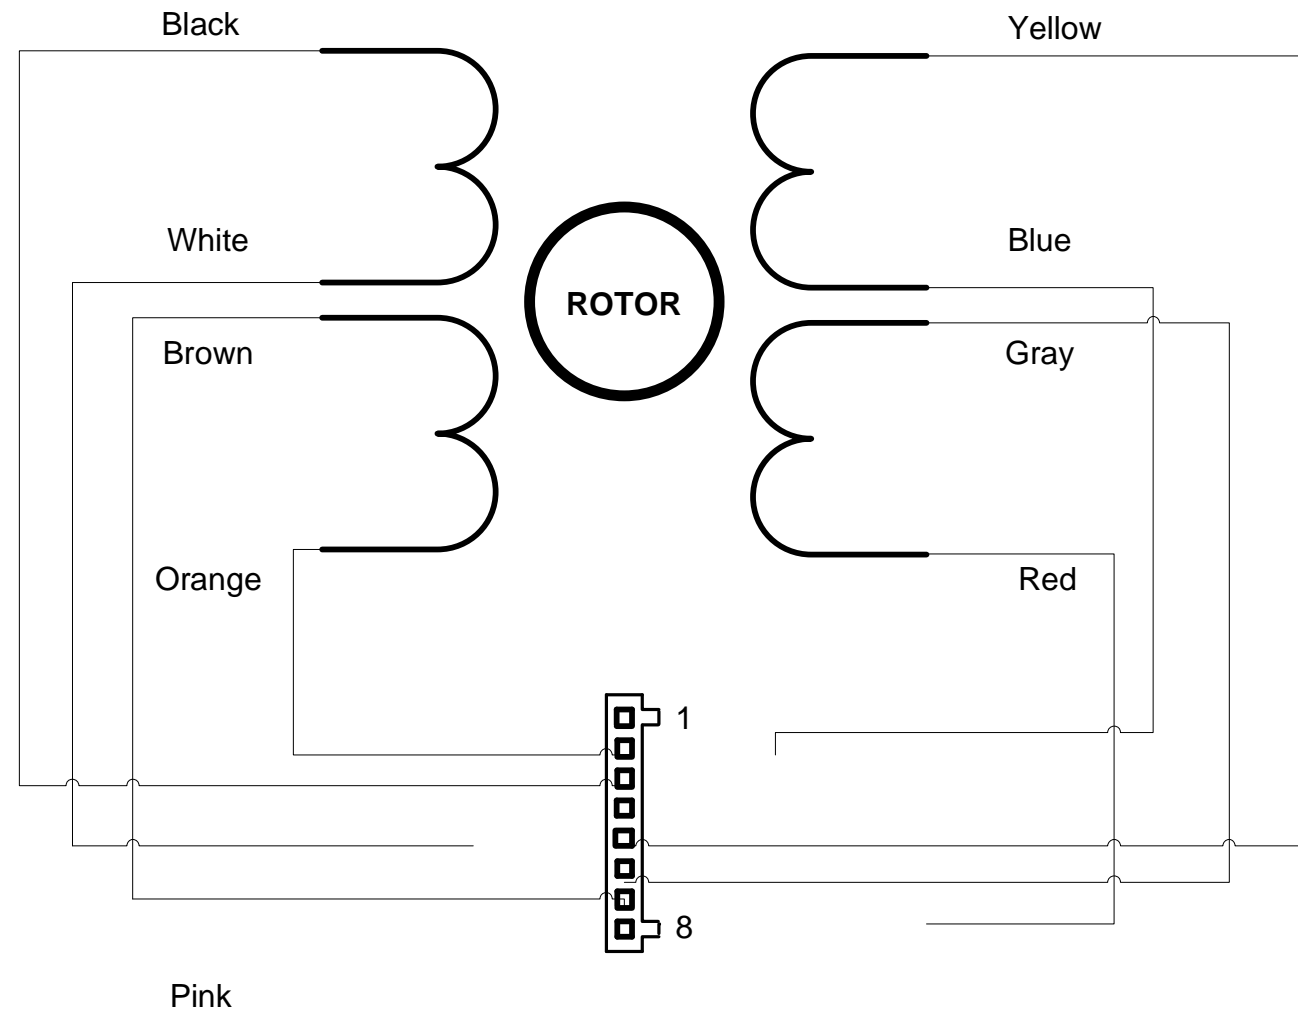

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.