



Stepping Motor



<http://www.casa.co.nz>

Edition: 19/09/2011

Type: 103G775-1340


General Data

Type #: 103G775-1340
Brand: Step-Sys (Sanyo-Denki)
OEM #: 103G775-1340
Frame: NEMA 23
Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)
Current: 0.3 Amp
Volts: 12 Vdc
Torque: ___ Nm @ ___ A (___ oz.in.)
Resistance: 41 Ohms / phase (nominal)
Inductance: 44.5 mH / phase (nominal)
Connector: 6 way x 0.1" (see diag.)
Wires: 6 wire (250mm nominal)
Shaft: 6.35mm dia x 20mm long
Shaft-Detail: Plain
Size: 56 x 56 x 40mm (nominal)
Wires: 6 wire (230mm nominal)
Supply-Max: 24~80Vdc (recommended max = V x 25)

Weight: 0.36kg

Condition: Used (refurbished)

Comments:

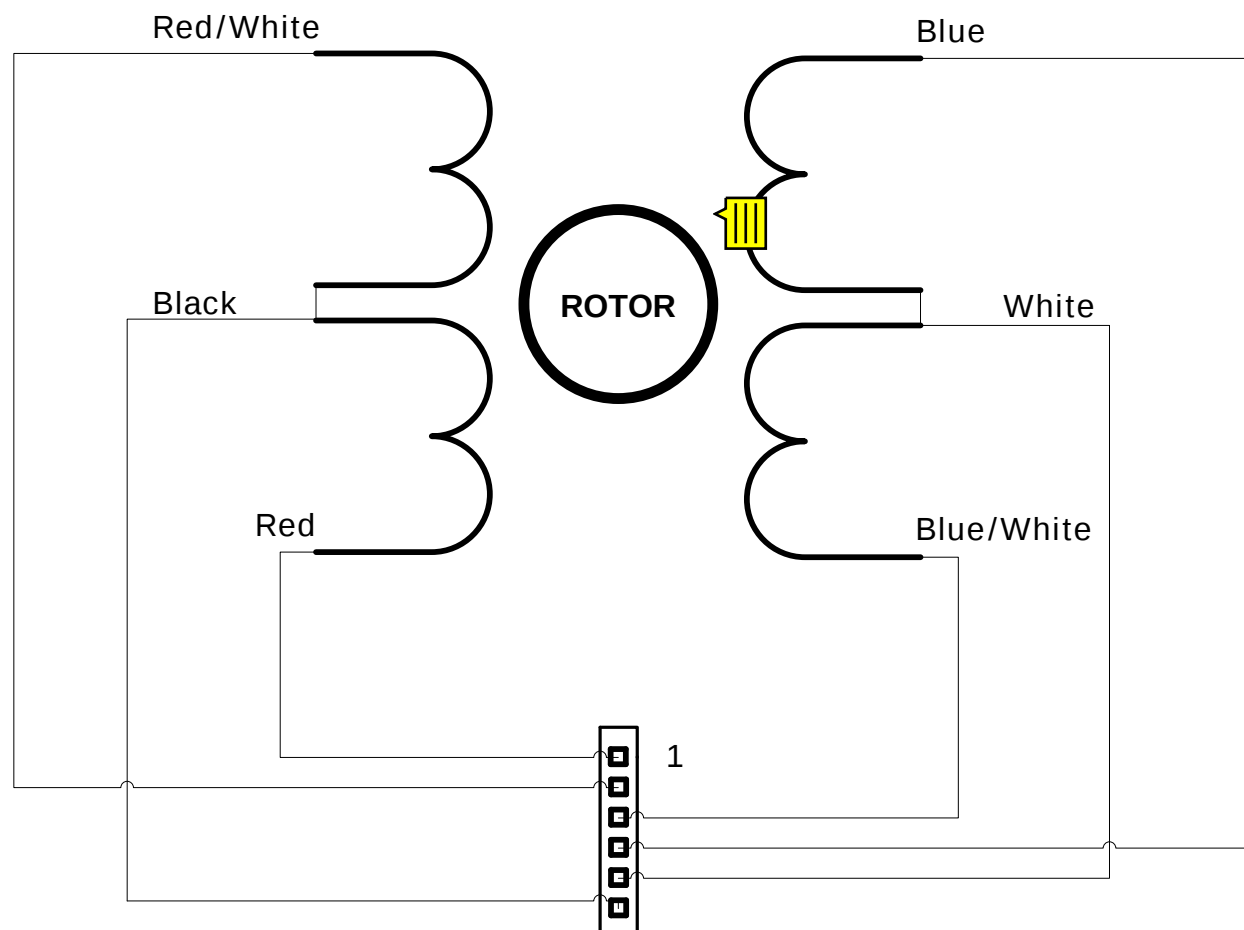

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.